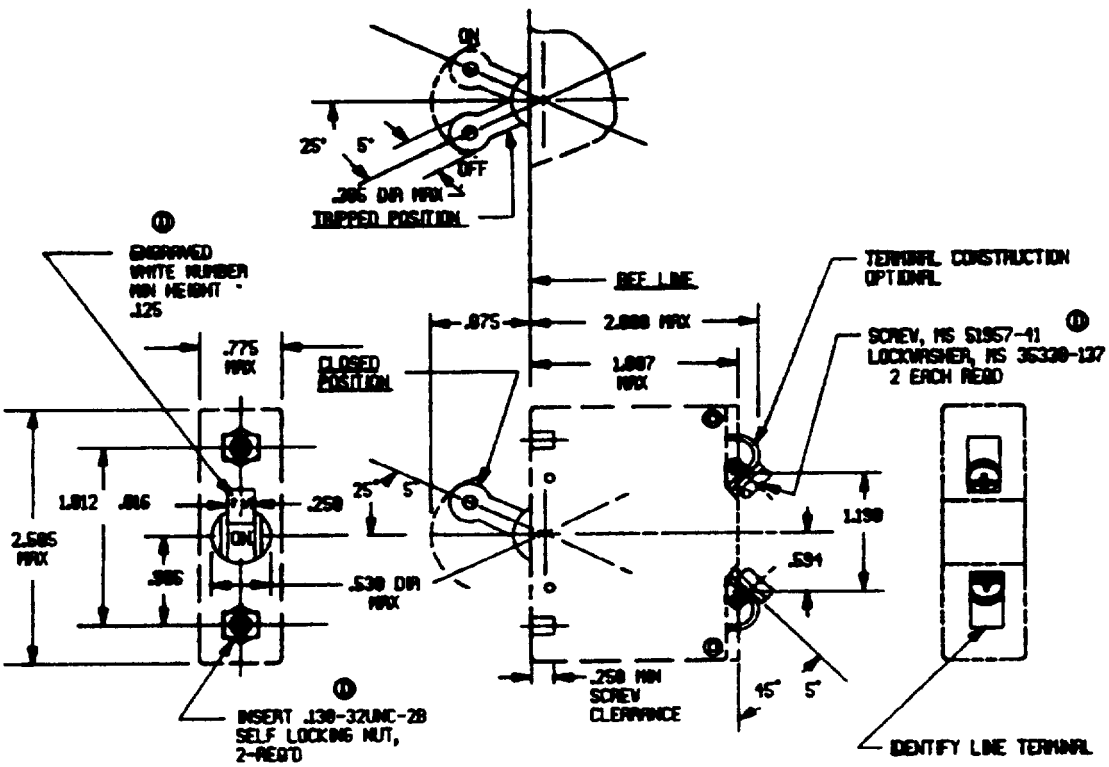


(11) DENOTES CHANGES

AMSC N/A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AREA MAVY - MS Other Govt USAF - 85 MAVY - ER	#	Circuit Breaker - Aircraft, Trip-Free, Toggle, 0.1 to 50 Amp, Type II	MS 25304
PREPARING ACTIVITY MIL-C-5809	SUPERSEDING		SHEET 1 OF 3
DD FORM 672-1			PROJECT NO. 5925-0111

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5925

TABLE I (D)

ELECTRICAL AND MECHANICAL CHARACTERISTICS

DASH NUMBER	NOMINAL CAPACITY AMPERES (A)	VOLTAGE DROP MAX (V)	WEIGHT MAX (LBS)	OPERATING FORCE MAX ON (LBS)	OPERATING FORCE MAX OFF (LBS)	ENDURANCE CYCLES RESISTIVE AC	ENDURANCE CYCLES RESISTIVE DC	ENDURANCE CYCLES INDUCTIVE AC	ENDURANCE CYCLES INDUCTIVE DC	MECHANICAL NO LOAD
1/10	0.1(1/10)	28	0.27	3	3	1/ 10,000	2/ 10,000	1/ 10,000 .6 to .7 LAGGING POWER FACTOR	2/ 10,000	10,000
2/10	0.2(2/10)	13								
3/10	0.3(3/10)	9								
5/10	0.5(1/2)	6								
7/10	0.7(7/10)	4								
1	1	3								
2	2	1.5								
3-1/2	3.5(3-1/2)	0.83								
5	5	0.60								
7-1/2	7.5(7-1/2)									
10	10									
15	15									
25	20	0.50								
25	25									
35	35									
50	50									

1/ 400 CYCLE 115/200 VOLT SYSTEM, TESTED AT 120 ± 5 VOLTS 360-420 HZ.
2/ 28 VOLT DC SYSTEM, TESTED AT 30 ± 1 VOLTS

TABLE II (D)

DETAIL CALIBRATION REQUIREMENTS - TRIP TIME IN SECONDS

NOMINAL CAPACITY AMPERES (A)	+25°C PERCENT RATED CURRENT 110	150	200	400	600	-55°C PERCENT RATED CURRENT 110	175	+121°C PERCENT RATED CURRENT 110	150
SAME AS TABLE I	MUST HOLD 1 HOUR MIN	MUST TRIP 1 HOUR MAX	18-80	1-9	0.02-0.4	MUST HOLD 1 HOUR MIN	MUST TRIP 1 HOUR MAX	MUST HOLD 1 HOUR MIN	MUST TRIP 1 HOUR MAX

AMBIENT TEMPERATURE TOLERANCE ± 2°C

TABLE III

INTERRUPTING CAPACITY (AMPERES) REQUIREMENTS

NOMINAL CAPACITY AMPERES (A)	TEST DESIGNATION PER MIL-C-5809 A	B	C	D	E	F	G 10	G 30	H 10	H 30
SAME AS TABLE I	3,500	3,500	3,000	3,000	(a) 2,000 (b) 1,000 (c) 750	(b) 1,500 (b) 750 (c) 500	(*)	(*)	(*)	(*)

(*) NOT APPLICABLE

P.A.
NAVY — AS
USAF - 85
ARMY - ER

INTERNATIONAL INTEREST

TITLE
Circuit Breaker - Aircraft, Trip-Free, Toggle, 0.1 to 50 Amp, Type II

MILITARY STANDARD
MS25304

SHEET 2 OF 3

PROCUREMENT SPECIFICATION
MIL-C-5809

REFERENCES

DD FORM 672-1

AMSC N/A

FSC 5925

AMENDED 26 Apr 58 AMENDED D FOR CHANGES SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

TABLE IV

ENVIRONMENTAL PERFORMANCE	
MAXIMUM OPERATING ALTITUDE - FT	50,000
OPERATING AMBIENT TEMPERATURE RANGE	-55°C TO +121°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - (REQUIRED)
SHOCK	250 MIL-STD-202 METHOD 213 TEST CONDITION J
ACCELERATION	100

REQUIREMENTS:

1 THE PART NUMBERS FOR CIRCUIT BREAKER IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW

MS25304-2

AMPERAGE RATING

BASIC PART NUMBER

WHEN A DESIGNATOR IS NOT APPLICABLE IT SHALL BE OMITTED FROM THE PART NUMBER

2. MARKING THE WORDS "ON" AND "OFF" SHALL BE ENGRAVED ON EACH LEAVER

NOTES:

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED: TOLERANCES DECIMALS ± 031; DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ANSI Y14.5M-82

2 PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.

3 VOLTAGE RATING 28 VDC NOMINAL OR 115V 400 HZ NOMINAL

4 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THE STANDARD SHALL TAKE PRECEDENCE

* CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL AGREEMENT ASCC 12/3 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

APPROVED 28 Apr 58 REVISED 0 FOR CHANGES SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.