


FED. SUP CLASS
5930

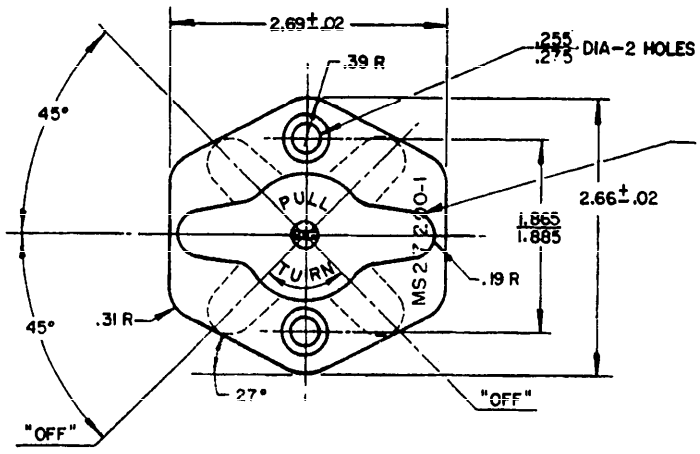

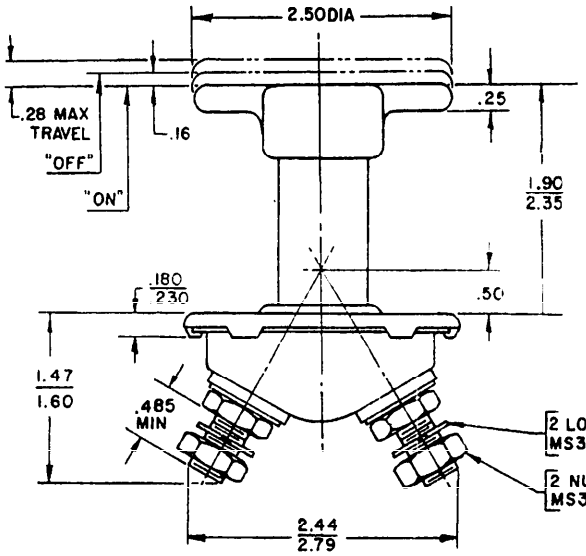

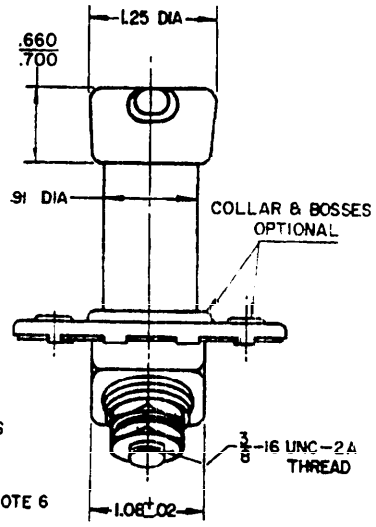

NOTES:

1. TYPE V (SINGLE POLE, SINGLE THROW, PULL-LATCH DISCONNECT, NORMALLY CLOSED); CLASS A (SLOW MAKE AND BREAK); GRADE 2 (OPEN) OF PROCUREMENT SPECIFICATION.
2. 300 AMP RESISTIVE LOAD, 150 AMP INDUCTIVE LOAD.
3. FORCE REQUIRED TO OPERATE THE SWITCH SHALL BE 13±2 POUNDS.
4. SHALL WITHSTAND A MINIMUM OVERLOAD FORCE OF 150 POUNDS WITHOUT DAMAGE.
5. SHALL NOT EXCEED A MAXIMUM WEIGHT OF 17 OUNCES.
6. NUT SHALL NOT BE COATED WITH BLACK OXIDE.
7. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARD FOR FEDERAL SERVICES HANDBOOK H 28.
8. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.01 ON DECIMALS, ±0° 30' ON ANGLES.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. THIS STANDARD IS NOT INTENDED TO LIMIT THE CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
12. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

MS PART NO.	FORMER PART NO.
MS 27200-1	8339369

P A ARMY-AT Other Cust NAVY-SH	TITLE SWITCH, PULL-SPST, LATCH DISCONNECT, 24 VOLT DC	MILITARY STANDARD MS 27200
PROCUREMENT SPECIFICATION MIL-S-13625	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-092/S-2994

REVIEW ACTIVITIES: ARMY-AT; NAVY-SH; DSA-ES

USER ACTIVITIES: ARMY-EL, ME

This military standard is mandatory for use by all departments and agencies of the department of defense. Selection for all new engineering and design applications and for procurement use shall be made from this document.

APPROVED 26 MARCH 1962 REVISED (A) 20 FEBRUARY 1968 (B) 7 NOVEMBER 1969

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.