This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PROCUREMENT SPECIFICATION MIL-C-27599 (USAF)

SUPERSEDES:

P.A. 15
Other Cust

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLE


TITLE

CONNECTOR, RECEPTACLE, ELECTRIC, SOLDER TYPE, WALL MOUNTING FLANGE, BAYONET COUPLING

MS27334(USAF)

MILITARY STANDARD

SHEET 1 OF 2

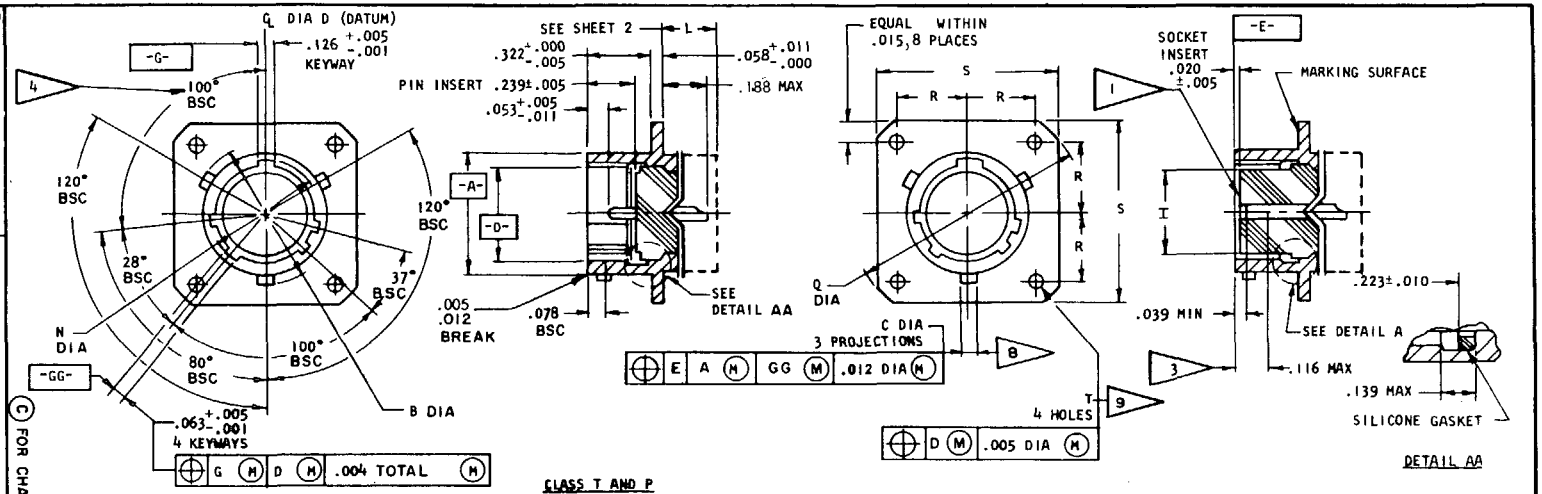

Ⓒ FOR CHANGES SEE SHEET 1

CLASS T AND P

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	I ±.005 DIA	N +.005 -.006 DIA	Q MAX	R BSC	S MAX	T +.010 -.005	CC	FOR INSERT ARR. SEE DWG MS
8	.473	.563	.078	.362	.296	.412	1.078	.297	.828	.120	.004	27343
10	.590	.680		.490	.413	.540	1.266	.3595	.954		.010	27344
12	.750	.859		.607	.527	.689	1.391	.406	1.047			27345
14	.875	.984		.732	.652	.814	1.516	.453	1.141			27346
16	1.000	1.108		.857	.777	.939	1.641	.4845	1.234			27347
18	1.125	1.233		.962	.866	1.039	1.766	.531	1.328			27348
20	1.250	1.358	.125	1.087	.991	1.164	1.891	.578	1.453			27349
22	1.375	1.483		1.212	1.116	1.289	2.016	.625	1.578			27350
24	1.500	1.610		1.337	1.241	1.414	2.204	.6875	1.703		.147	27351

NOTES:

1. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 T.I.R.
2. DIMENSIONS IN INCHES.
3. THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING.
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE TABLE A, FIGURE 2 OF PROCUREMENT SPECIFICATION.
5. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R.
6. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
7. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T.I.R. AT MMC.
8. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.
9. THE GAGE FEATURES FOR GG SHALL BE .010 SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.

EXAMPLE OF PART NUMBER: Ⓒ

MS27334 T 24 A 61 P A

MS NO.	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR. NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FED. SUP CLASS 5935

APPROVED 26 JAN 66 REVISED Ⓐ 10 AUG 66 Ⓑ 1 FEB 67 Ⓒ 20 DEC 67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SHELL SIZE	LP MAX	XP MIN DIA	YP MAX DIA
8	453	.317	.531
10		.434	.641
12		.548	.766
14		.673	.891
16		.798	1.016
18		.899	1.125
20		1.024	1.250
22		1.149	1.375
24	.531	1.274	1.500

SHELL SIZE	LT MAX	VV THREAD UNEF-2A MOD (PLATED) SIZE	MAJOR DIA MOD
8	.250	7/16-28	.421-.417
10		9/16-24	.542-.538
12		11/16-24	.667-.663
14		13/16-20	.791-.787
16		15/16-20	.916-.912
18		1 1/16-18	1.034-1.030
20		1 3/16-18	1.158-1.154
22		1 5/16-18	1.283-1.279
24	.328	1 7/16-18	1.408-1.404

APPROVED 26 JAN 66 REVISED (A) 10 AUG 66 (B) FOR CHANGES SEE SHEET 1 (C) FOR CHANGES SEE SHEET 1

This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. 15 Other Cust	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, SOLDER TYPE, WALL MOUNTING FLANGE, BAYONET COUPLING	MILITARY STANDARD MS27334(USAF)
PROCUREMENT SPECIFICATION MIL-C-27599 (USAF)	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 63 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.