This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 15, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672

P.A AF - 85
Other Cust
Army - CR
Navy - AS

Procurement Specification
MIL-C-38999

International Interest

SUPERSEDES:

TITLE
COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II

(F) denotes changes

MILITARY STANDARD
MS27510


PAGE 1 OF 3

FED. SUP CLASS
5935

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5935-3613-0

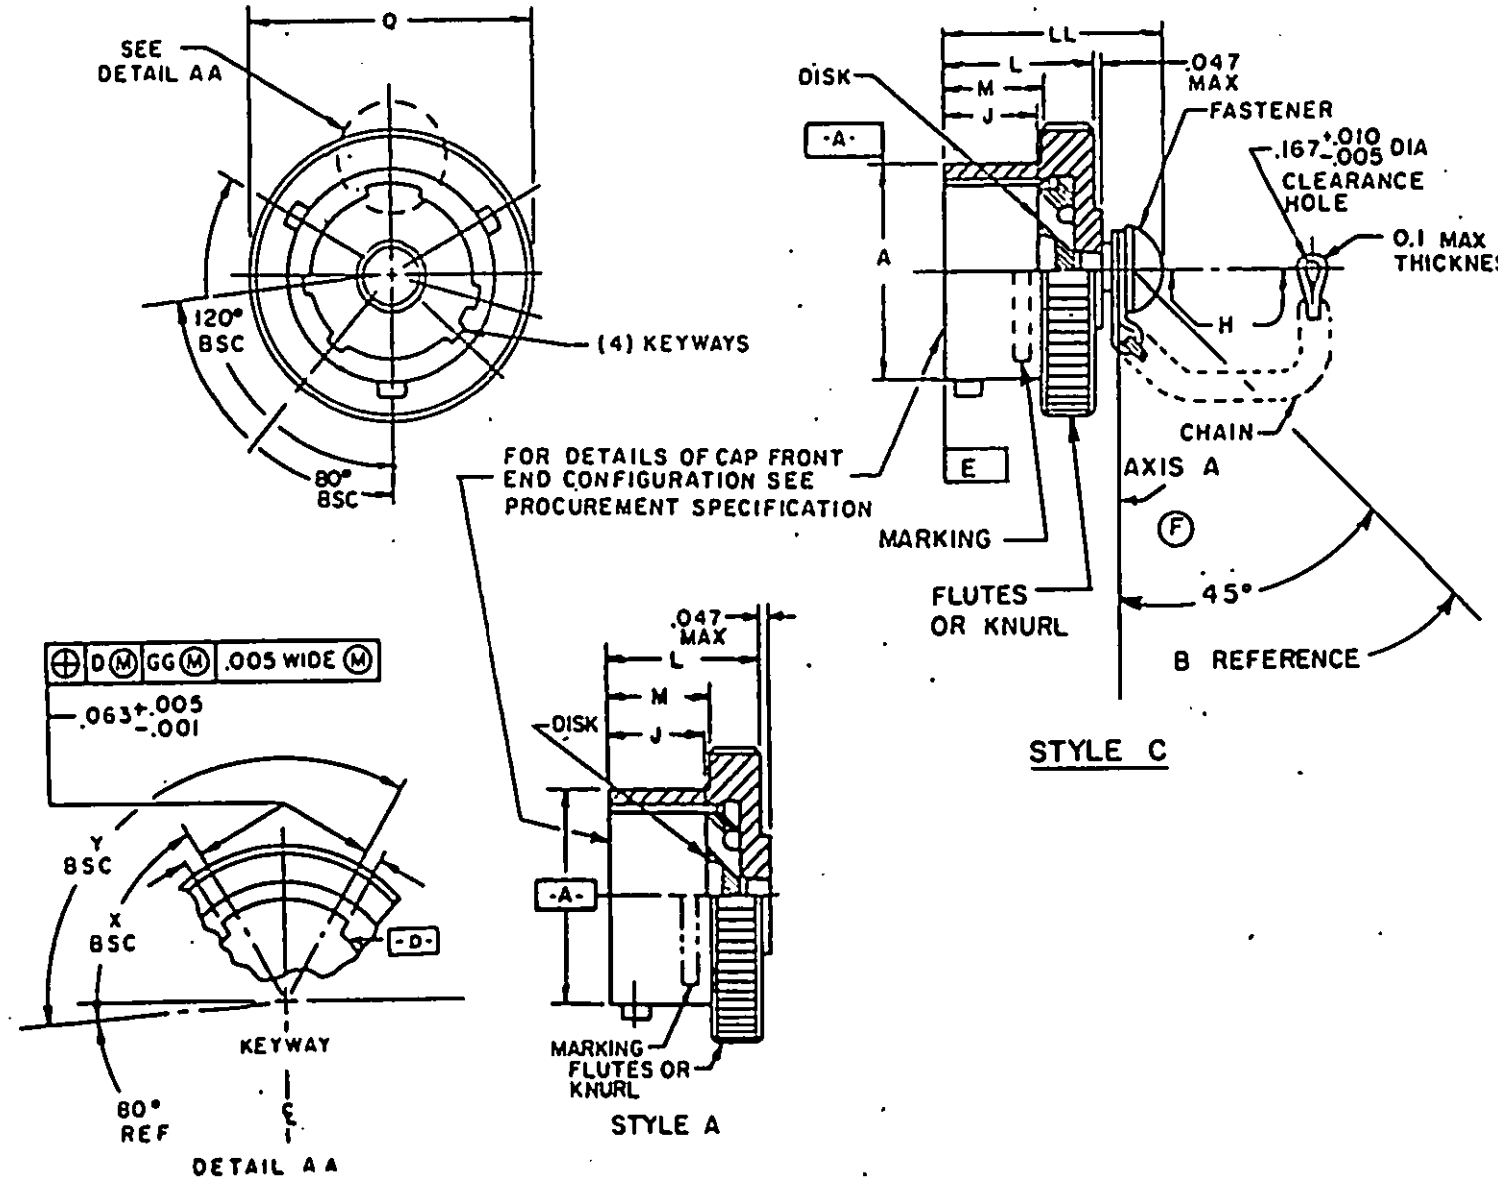

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

Example of part number

MS27510 A 10 C L

- MS27510: MS
- A: Finish
- 10: Shell size
- C: Style
  - C - chain
  - A - Without chain
- L: Length (tolerance - $^{+.500}_{-.250}$)
  - L - 5 inch chain in lieu of standard length
  - M - 6 inch chain in of standard length
  - N - 7 inch chain in lieu of standard length

Shell size	A +.001 -.005 dia	H +.500, -.250 Standard chain Length	J +.010 -.015	L Max	M Min	J Max dia	X BSC degree	Y BSC degree	LL Max
8	.473	3.0	.222	.57	.31	.72	82°	118°	.82
10	.590					.85	72°	128°	
12	.750	3.50				1.00	68°	132°	
14	.875					1.13	66°	134°	
16	1.000					1.25	70°	130°	
18	1.125					1.38			
20	1.250	4.0				1.50			
22	1.375					1.63	74°	126°	
24	1.500					1.75			

APPROVED 27 Dec 77 REVISED F For changes see pages 1, 2, and 3.

User activities: Army - Navy - Air Force -

Review activities: Army - MI, AR Navy - EC, MC, OS Air Force - 15, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF - 85	International interest	TITLE COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II	MILITARY STANDARD
Other Cust Army - CR Navy - AS			MS27510
Procurement Specification MIL-C-38999		SUPERSEDES:	PAGE 2 OF 3

DD FORM 1 JAN 72 672 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.57	14.5	1.38	35.1
.005	0.13	.59	15.0	1.50	38.1
.010	0.25	.72	18.3	1.63	41.4
.015	0.38	.75	19.0	1.75	44.4
.047	1.19	.82	20.8	3.00	76.2
.063	1.60	.85	21.6	3.50	88.9
.167	4.24	.875	22.22	4.00	101.6
.222	5.64	1.00	25.4	5.00	127.0
.25	6.4	1.125	28.58	6.00	152.4
.31	7.90	1.13	28.7	7.00	177.8
.473	12.01	1.25	31.8		
.500	12.70	1.375	34.92		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: Cap: Impact extruded or machined aluminum alloy.
   Disk: Silicone elastomer.
   Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
   Fastener: Stainless steel, passivated.
4. Finish: See MIL-C-38999.
5. BSC dimensions apply at maximum material condition (MMC).
6. The gauge features for GG shall be .004 (.10 mm) smaller than MMC size at basic location.
(F) 7. In the event of conflict between the text of this standard and the referenced cited herein, the text of this standard shall take precedence.
(F) 8. Referenced Government documents of the issue listed in that issue of the Department Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
9. Applicable connectors: MIL-C-27599 series I and MIL-C-38999 series I.
(F) 10. The protective cover and chain assembly shall withstand a static tensile load of 35 pounds applied along the B reference line for 5 minutes.
(F) 11. Not for space born applications.

APPROVED 27 Dec 77 REVISED (F) For changes see pages 1, 2, and 3

Navy - EC, MC, OS
Air Force - 15, 99

Navy -
Air Force -

Preparation of revisions. Selection for all new engineering and design applications and for repair use shall be made from this document when applicable.

P.A AF - 85 Other Cust Army - CR Navy - AS	International Interest	TITLE COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27510
Procurement Specification MIL-C-38999		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) previous editions of this form are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.