INCH-POUND

MS3127J
10 June 1993
SUPERSEDING
MS3127H
16 August 1979


MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES 1, CRIMP TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING

INACTIVE FOR NEW DESIGN. USE MS3470

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-26482.

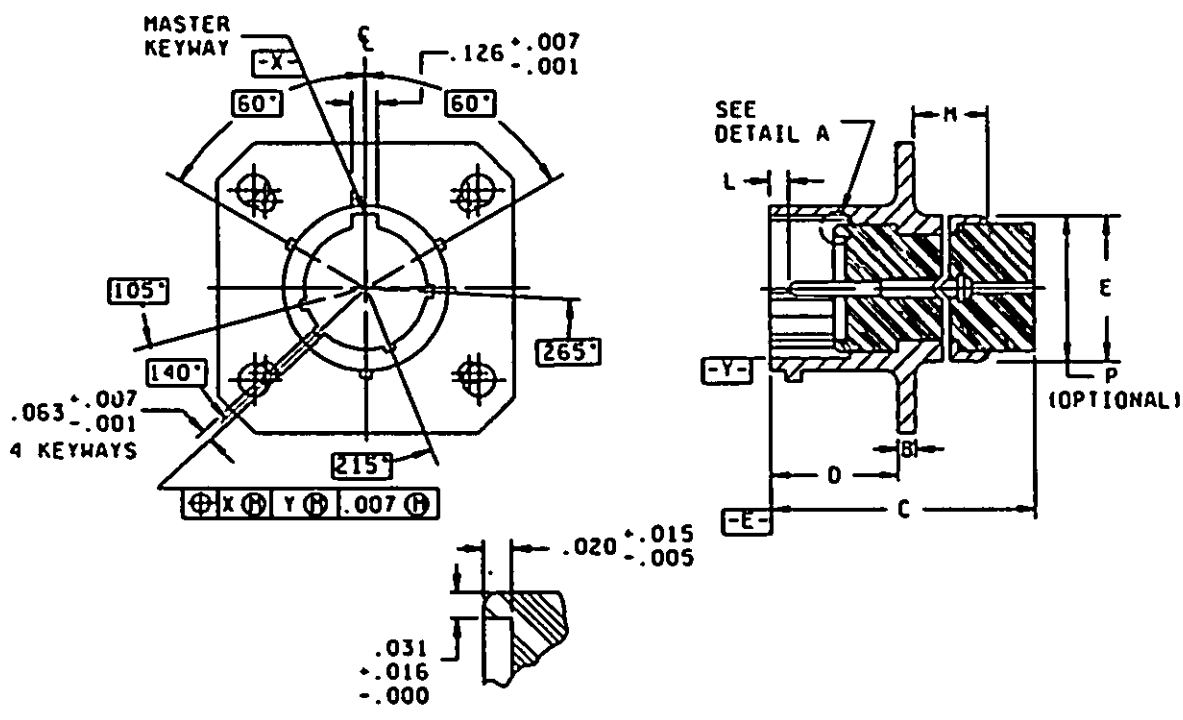


STYLE P (PIN INSERT)

FIGURE 1. Dimensions and configurations.

J denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

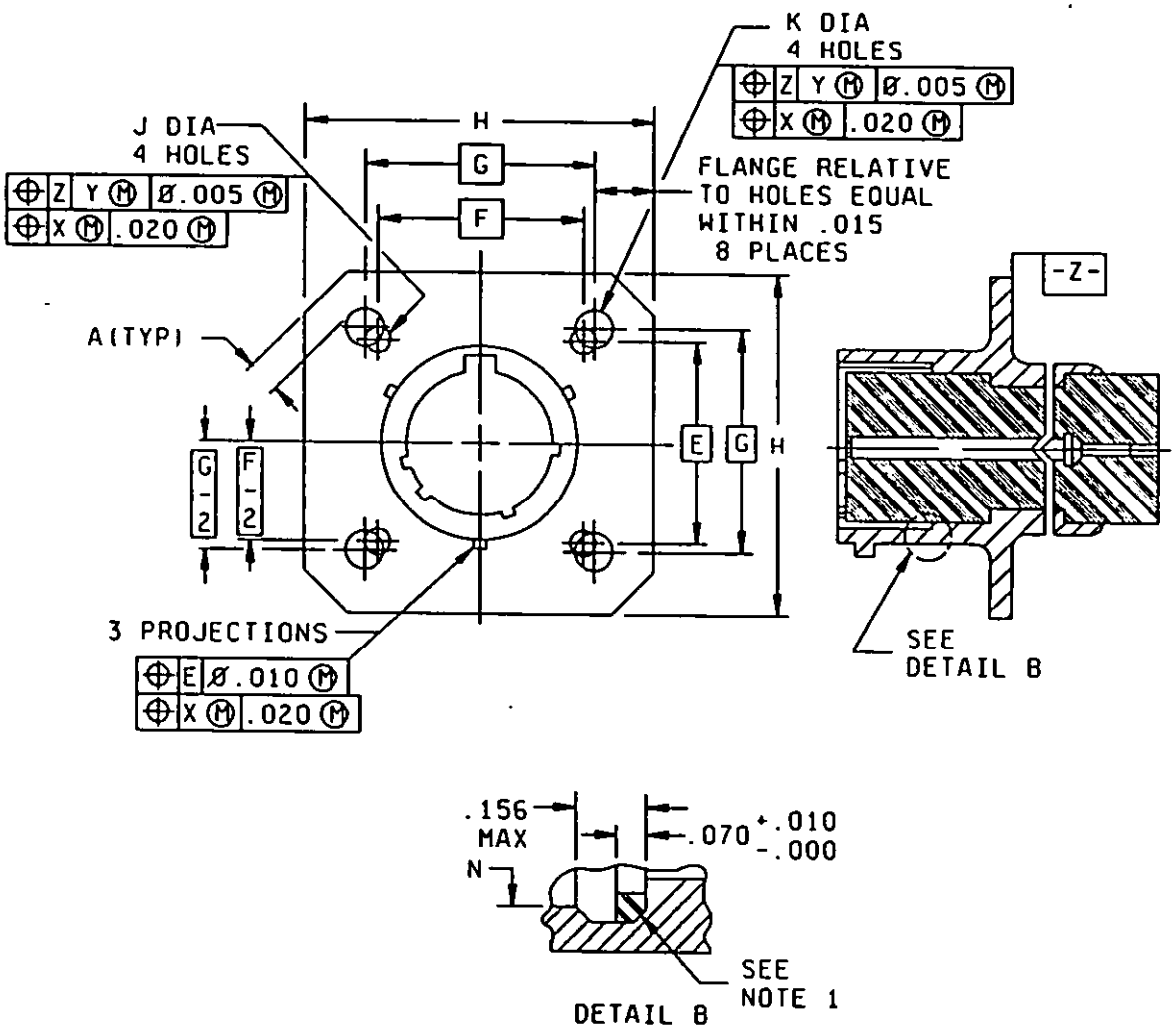

STYLE S (SOCKET INSERT)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Connector dimensions

Shell size	A min edge dist	B ±.016 thk mtg flange	C max overall length	D +.031 -.000 mtg flange location	E dia +.031 -.024 OD	F (TP) mtg holes	G (TP) mtg holes
10	.035	.062	1.320	.462	.562	.719	.812
12					.688	.812	.938
14					.812	.906	1.031
16					.938	.969	1.125
18					1.062	1.062	1.203
20	.050	.094	1.367	.556	1.188	1.156	1.297
22					1.312	1.250	1.375
24			1.418	.589	1.438	1.375	1.500

(J)

Connector dimensions

Shell size	H max length	J ±.005 dia mtg holes	K ±.005 dia mtg holes	L +.010 -.020 pin contact location	M max	N max ID gasket	P UNEF-2A thread (opt)
10	1.141	.120	.150	.085	.406	.457	.5625-24
12	1.266					.564	.6875-24
14	1.360					.689	.8125-20
16	1.453					.814	.9375-20
18	1.532					.907	1.0625-18
20	1.688			.147		1.039	1.1875-18
22	1.766					1.164	1.3125-18
24	1.891	.147				1.289	1.4375-18

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.085	2.16	.688	17.48	1.156	29.36	1.438	36.53
.005	0.13	.094	2.39	.689	17.50	1.164	29.57	1.453	36.91
.007	0.18	.120	3.05	.719	18.26	1.188	30.18	1.500	38.10
.010	0.28	.126	3.20	.812	20.62	1.203	30.56	1.532	38.91
.015	0.39	.147	3.73	.814	20.68	1.250	31.75	1.688	42.88
.016	0.41	.150	3.82	.906	23.01	1.266	32.16	1.766	44.86
.020	0.51	.156	3.96	.907	23.04	1.289	32.74	1.891	48.03
.024	0.61	.406	10.31	.938	23.83	1.297	32.94		
.031	0.79	.457	11.61	.969	24.61	1.312	33.32		
.035	0.89	.462	11.73	1.031	26.19	1.320	33.53		
.050	1.28	.556	14.12	1.039	26.39	1.360	34.54		
.062	1.57	.562	14.27	1.062	26.97	1.367	34.72		
.063	1.60	.564	14.33	1.125	28.58	1.375	34.93		
.070	1.78	.589	14.96	1.141	28.98	1.418	36.02		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±1/2°.
4. True position (TP) tolerance specified are in accordance with ANSI Y14.5.
5. Intermatebility dimensions shall be in accordance with MIL-C-26482.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.


(J) Connector mating: This connector mates with MS3126.

Insert arrangements: See MIL-STD-1669.

(J) Connectors accessories: See MIL-C-85049.

Packing material: See MIL-STD-147.

(J) Part or Identifying Number (PIN) example:

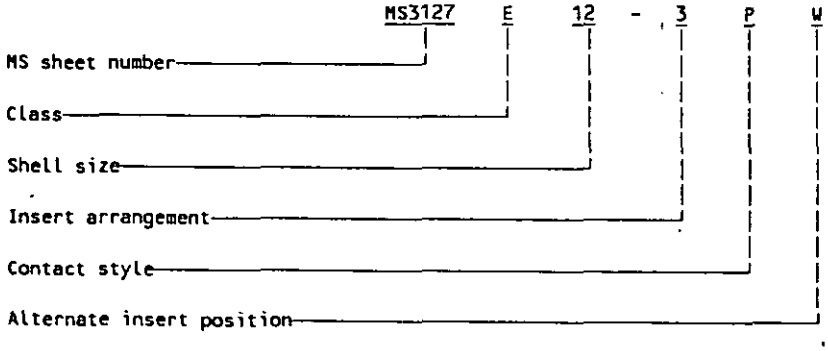

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

(J) Qualification:

QPL evaluating activity: Defense Electronics Supply Center, (DES-E), Dayton, OH 45444.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activites:
Army - AV, MI
Navy - EC, SH
Air Force - 11, 17, 99
DLA - ES

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3897)

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:59Z
Check the source to verify that this is the current version before use.