
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

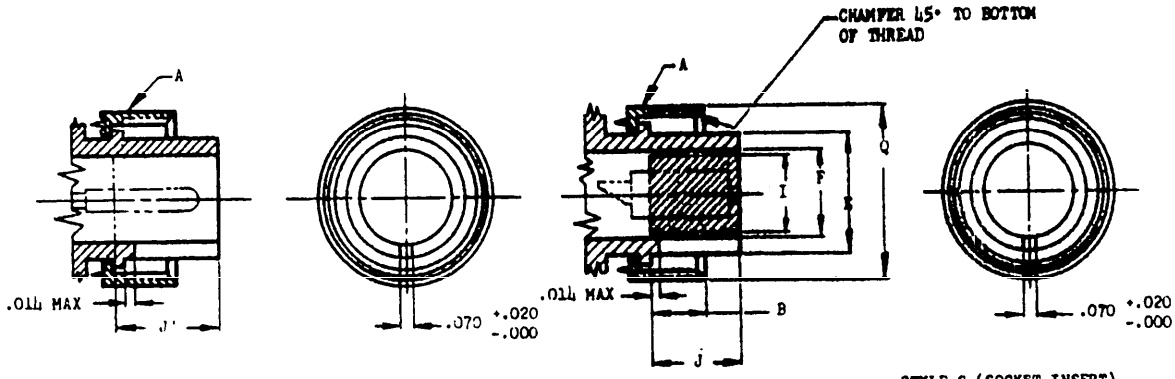

ENVIRONMENT RESISTING (R) RECEPTACLE

SIZE	A COUPLING THREAD	B +.000-.062 USABLE THREAD	E +.000 -.015 OD	F MIN ID	I MAX INSERT DIA	J' +.047 -.000 INSERT LOCATION	J ±.005 LENGTH ENGAGE-MENT	Q MAX OVERALL OD	FOR INSERT ARRANGEMENT SEE DRAWING
8S	1/2-28	.375	.365	.252	.250	.531	.531	.844	MS33690
10S	5/8-24		.440	.323	.320			.969	
10SL			(a).446		(a).440			.969	
12S	3/4-20		.555	.450	.448			1.062	MS33681
14S	7/8-20		.675	.526	.525	.719	.719	1.156	MS33682
16S	1 -20		.805	.651	.650	.531	.531	1.250	MS33683
12	3/4-20	.625	.555	.450	.448	.719	.719	1.062	MS33681
14	7/8-20		.675	.526	.525	.531	.531	1.156	MS33682
16	1 -20		.805	.651	.650	.719	.719	1.250	MS33683
18	1-1/8-18		.930	.776	.770			1.344	MS33684
20	1-1/4-18		1.050	.932	.925			1.469	MS33685
22	1-3/8-18		1.175	1.026	1.020			1.594	MS33686
24	1-1/2-18		1.300	1.151	1.145			1.719	MS33687
28	1-3/4-18		1.520	1.370	1.365			1.969	MS33688
32	2 -18		1.770	1.620	1.615			2.219	MS33689
36	2-1/4-16		1.900	1.838	1.830			2.469	MS33690

(a) INSERT GUARD REQUIRED FOR RESILIENT INSERTS ONLY.

EXAMPLE OF DESIGN DESIGNATION: MS33679R18-5S=ENVIRONMENT RESISTING, SIZE 18, INSERT ARRANGEMENT -5 (SEE MS33684) STYLE S (SOCKET CONTACTS, SEE FIGURE 2, MIL-C-5015).

FOR DESIGN DETAILS SEE SPECIFICATION MIL-C-5015.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 17 Dec 58 REVISED

P.A. Navy - Aer Other Cust Army - SigC USAF	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, INTEGRAL MOUNTING	MILITARY STANDARD MS33679
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES: AND10459	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23117:06Z
Check the source to verify that this is the current version before use.