FED. SUP CLASS
5305

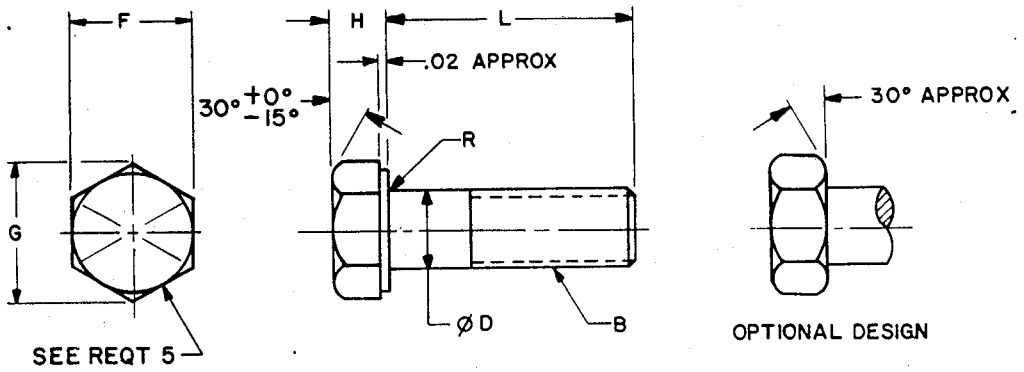


TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE		.250	.312	.375	.438	.500	.625	.750
B - THREADS PER INCH UNF-2A		28	24	24	20	20	18	16
Ø D - BODY DIAMETER	MAX	.2500	.3125	.3750	.4375	.5000	.6250	.7500
	MIN	.2450	.3065	.3690	.4305	.4930	.6170	.7410
F - WIDTH ACROSS FLATS	MAX	.4375	.5000	.5625	.6250	.7500	.9375	1.1250
	MIN	.4280	.4890	.5510	.6120	.7360	.9220	1.1000
G - WIDTH ACROSS CORNERS	MAX	.5050	.5770	.6500	.7220	.8660	1.0830	1.2990
	MIN	.4880	.5570	.6280	.6980	.8400	1.0510	1.2540
H - HEAD HEIGHT	MAX	.1630	.2110	.2430	.2910	.3230	.4030	.4830
	MIN	.1500	.1950	.2260	.2720	.3020	.3780	.4550
R - RADIUS	MAX	.0250	.0250	.0250	.0250	.0250	.0450	.0450
	MIN	.0150	.0150	.0150	.0150	.0150	.0200	.0200
1/ MIN TENSILE LOAD - LBS		4,350	6,950	10,500	14,200	19,200	30,700	44,800

L LENGTH	TOLERANCE	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.750 1.000	+.000 -.031	01	05	08 09	12		18	
1.250 1.500 1.750 2.000	+.000 -.062	02 03 04	06	10 11	13 14	16	19	21
2.500 3.000	+.000 -.094		07		15	17	20	

1/ SEE REQUIREMENT 6

USER ACTIVITIES:
ARMY-ME, MI
NAVY-OS, MC

REVIEWER ACTIVITIES:
ARMY-EA
AIR FORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84
REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), STEEL, GRADE 5, UNF-2A	MS51490
PROCUREMENT SPECIFICATION: FF-S-85		SUPERSEDES:		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 20261O-23T18:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. MEDIUM CARBON STEEL, GRADE 5, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. FINISH. ZINC COATING, IN ACCORDANCE WITH ASTM B633-78, Fe/Z_n5 (5 μm), TYPE II.
3. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.
4. THREAD LENGTH. MINIMUM THREAD LENGTH SHALL BE TWICE THE DIAMETER PLUS .250 INCH. THE TOLERANCE SHALL BE PLUS .188 INCH OR 2-1/2 THREADS, WHICHEVER IS GREATER. ON SCREWS THAT ARE TOO SHORT FOR MINIMUM THREAD LENGTHS, THE DISTANCE FROM THE BEARING SURFACE OF THE HEAD TO THE FIRST COMPLETE THREAD SHALL NOT EXCEED THE LENGTH OF 2-1/2 THREADS FOR SIZES UP TO AND INCLUDING 1.000 INCH AND 3-1/2 THREADS FOR SIZES LARGER THAN 1.000 INCH.
5. HEAD MARKING. HEADS SHALL BE MARKED IN ACCORDANCE WITH MIL-HDBK-131. RAISED MARKINGS ARE PREFERRED, STAMPINGS ARE ACCEPTABLE.
6. BASED ON MINIMUM ULTIMATE TENSILE STRENGTH OF 120,000 PSI FOR DIAMETERS THRU 1 INCH. TENSILE LOADS ARE CALCULATED BY THE STRESS AREAS INDICATED IN FED-STD-H28/2.
7. PART NUMBERS. THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS51490-01 - SCREW, CAP, HEXAGON HEAD, STEEL GRADE 5, .250-28UNF-2A, LENGTH 1.000, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
ARMY-ME,MI
NAVY-OS,MC

REVIEWER ACTIVITIES:
ARMY-EA
AIR FORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84 REVISED

P.A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust SH 99		SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), STEEL, GRADE 5, UNF-2A,	MS51490
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 20261023T18:03Z
Check the source to verify that this is the current version before use.