
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review activities: ARMY - AT, AV, EA, GL, MI NAVY - AS AIR FORCE- 11, 82 DLA - IS

User activities: ARMY - ME NAVY - YD

FED. SUP CLASS 4030

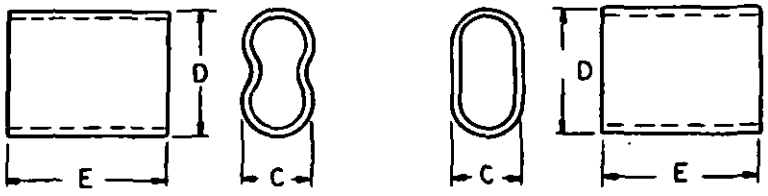

OPTIONAL DESIGNS

TABLE I. DASH NUMBERS AND DIMENSIONS.

FOR USE WITH ZINC OR TIN COATED CARBON STEEL CABLE		FOR USE WITH CRES CABLE	CABLE SIZE	C	D	E
ZINC COATED COPPER SLEEVE DASH NUMBER	PLAIN COPPER SLEEVE DASH NUMBER	TIN COATED COPPER SLEEVE DASH NUMBER	NOMINAL	MAXIMUM	MAXIMUM	MAXIMUM
20	40	--	1/32	.094	.140	.310
21	41	81	3/64	.140	.206	.440
22	42	82	1/16	.180	.270	.440
23	43	83	3/32	.240	.380	.440
24	44	84	1/8	.340	.512	.750
25	45	85	5/32	.370	.600	.750
26	46	86	3/16	.450	.710	1.000
27	47	87	7/32	.480	.740	.940
28	48	88	1/4	.540	.840	1.190
29	49	89	5/16	.680	1.030	1.125
30	50	90	3/8	.750	1.143	1.312
31	51	91	7/16	.870	1.320	1.813
32	52	92	1/2	.980	1.490	1.940
33	53	93	9/16	1.100	1.710	2.062
34	54	94	5/8	1.200	1.880	2.440

FOR USE WITH CRES CABLE	CABLE SIZE	C	D	E
CRES SLEEVE DASH NUMBER	NOMINAL	MAXIMUM	MAXIMUM	MAXIMUM
60	1/32	.094	.143	.310
61	3/64	.140	.206	.440
62	1/16	.143	.236	.440
63	3/32	.190	.304	.440
64	1/8	.241	.387	.440
65	5/32	.322	.500	.750
66	3/16	.360	.567	1.000
67	7/32	.430	.667	.900
68	1/4	.460	.724	1.150
69	5/16	.690	1.070	1.440
70	3/8	.750	1.130	1.688
71	7/16	.940	1.380	1.813
72	1/2	1.000	1.440	2.062
73	9/16	1.190	1.750	2.312
74	5/8	1.250	1.820	2.440
75	3/4	1.440	2.250	3.062

APPROVED 10 MAY 68 REVISED (A) 15 SEPT 77 (B) 10 AUG 78 (C) 28 JUN 85

(C) ENTIRE STANDARD REVISED

P. A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust SH 99		SLEEVE, SWAGING-WIRE ROPE	MS 51844
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 1 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 4030-0187

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.

TABLE II. CROSS-REFERENCE TABLE.

MS REPLACEMENT NUMBER	MS NUMBER INACTIVE FOR NEW DESIGN
MS51844-62	MS51844-1
MS51844-64	MS51844-2
MS51844-66	MS51844-3
MS51844-68	MS51844-4
MS51844-90	MS51844-5
MS51844-92	MS51844-6
MS51844-94	MS51844-7

TABLE III. NOMINAL BREAKING STRENGTH.

CABLE SIZE NOM	CONSTRUCTION	1) NOMINAL BREAKING STRENGTH (lbs) MIL-W-83420 TYPE I		RR-W-410 TYPE I CLASS 2	
		ZINC OR TIN COATED CARBON STEEL COMP A	CORROSION RESISTANT STEEL COMP B	ZINC COATED CARBON STEEL	CORROSION RESISTANT STEEL
1/32	3X7	110	110		
3/64	7X7	270	270		
1/16	7X7	480	480		
1/16	7X19	480	480		
3/32	7X7	920	920		
3/32	7X19	1000	920		
1/8	7X19	2000	1760		
5/32	7X19	2800	2400		
3/16	7X19	4200	3700		
7/32	7X19	5600	5000		
1/4	7X19	7000	6400		
5/16	7X19	9800	9000		
3/8	7X19	14400	12000		
7/16	6X19 IWRC			18360	16300
1/2	6X19 IWRC			24000	22800
9/16	6X19 IWRC			30200	28500
5/8	6X19 IWRC			37000	35000
3/4	6X19 IWRC			53000	49600

1) SEE NOTE 2. BREAKING STRENGTH

REQUIREMENTS:

1. MATERIAL: STEEL, CORROSION-RESISTANT, TYPE 304 (UNS S30400) IN ACCORDANCE WITH ASTM A249 OR ASTM A269 OR TYPE 305 (UNS S30500) IN ACCORDANCE WITH ASTM A249 OR ASTM A511.
COPPER, TYPE 102, (UNS C10200), TYPE 103 (UNS C10300) OR TYPE 122 (UNS C12200) IN ACCORDANCE WITH ASTM B75.

2. PROTECTIVE COATING AND SURFACE TREATMENT: STEEL, CORROSION-RESISTANT SLEEVE SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380.
ZINC COATED COPPER SLEEVE SHALL BE IN ACCORDANCE WITH ASTM B633, TYPE I, Fe/Zn5 OR MIL-C-81562, TYPE I, CLASS 6.
TIN COATED COPPER SLEEVE SHALL BE IN ACCORDANCE WITH MIL-T-10727, TYPE I, .0003 INCH MINIMUM THICKNESS.

User activities
ARMY - ME
NAVY - YD

Review activities
ARMY - AT, AV, ER, GL, MI
NAVY - AS
AIR FORCE - 11, 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4030

3. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE APPLICABLE DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: MS51844-82-SLEEVE, SWAGING-WIRE ROPE, TIN COATED COPPER SLEEVE FOR USE WITH 1/16 INCH NOMINAL SIZE CRES CABLE.

NOTES:

1- UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

2- NOMINAL BREAKING STRENGTH: EYE SPLICES, WHEN PROPERLY ASSEMBLED USING THE MANUFACTURER'S RECOMMENDED TOOLS AND SPLICING INSTRUCTIONS AND WHEN PULLED WITH INCREASING TENSION SHALL HOLD UNTIL WIRE ROPE BREAKS. IT IS PREFERRED THAT TENSILE LOADS AT FAILURE BE NOT LESS THAN 90 PERCENT OF THE BREAKING STRENGTH SPECIFIED IN TABLE III.

3- IN ALL APPLICATIONS WHERE RR-W-410, TYPE I, CLASS 2 WIRE ROPE IS BEING USED, PROOF TESTS SHOULD BE CONDUCTED TO DETERMINE IF ONE OR TWO SLEEVES ARE REQUIRED.

4- IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

5- REFERENCED GOVERNMENT (OR NON GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 10 MAY 68 REVISED © FOR CHANGES SEE PAGES 1, 2 AND 3

User activities:
ARMY - ME
NAVY - YD

Review activities:
ARMY - AT, AV, EA, GL, MI
NAVY - AS
AIR FORCE - 11, 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust SH 99		SLEEVE, SWAGING-WIRE ROPE	MS 51844
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 3 OF 3

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 4030-0187

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.