


FED. SUP CLASS
2330

USER ACTIVITIES:

REVIEWER ACTIVITIES:

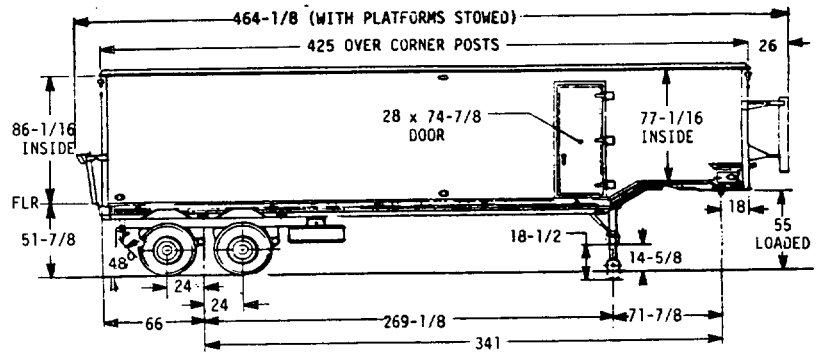

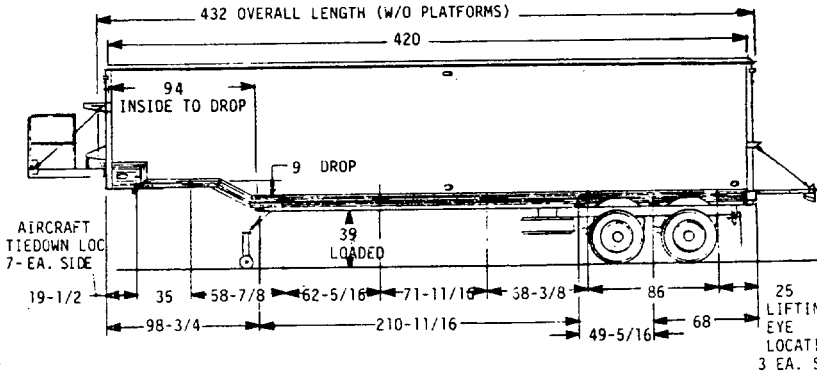

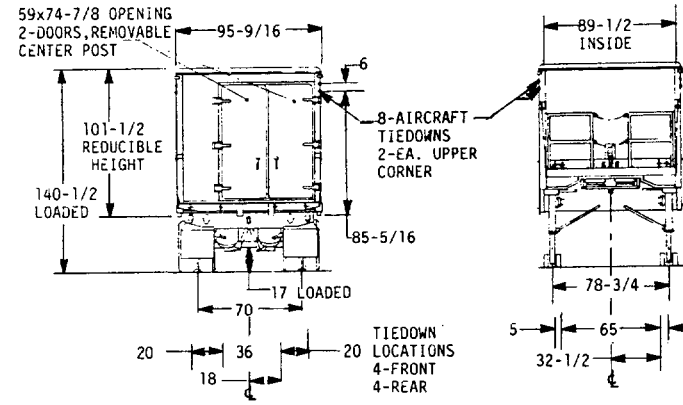

MS PART NO.	ENGINEERING DWG NO
MS52159-1	8750049

APPROVED 3 MAY 85 REVISED

P. A. ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN; 10 TON, 4 WHEEL, TEST STATION, M995.	MILITARY STANDARD MS52159(AT)
PROCUREMENT SPECIFICATION MIL-S-46756	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR M52 OR M818 OR COMMERICIAL TRUCK TRACTOR

WEIGHTS:

	TOTAL	LANDING GEAR	KING PIN SUSPENSION PIN
EMPTY	15,010		5,120 9,890
EMPTY	15,010	5,730	9,280
PAYLOAD	20,000*		
LOADED	35,010		13,110 21,900
LOADED	35,010	16,620	18,390
DOLLY			4,500

* RATED PAYLOAD, EVENLY DISTRIBUTED

SHIPPING VOLUME: 3384 CU. FT.

FORDING DEPTH: 60 INCHES

AIR TRANSPORTABILITY:
IN C5-A AS IS
IN C141 WITH DOLLY REMOVED AND LANDING GEAR IN HORIZONTAL POSITION.

BODY: ALUMINUM STRUCTURE; ONE SINGLE DOOR IN SIDE WALL; TWO DOORS IN REAR WALL, CURBSIDE.

INSULATION: WALLS, DOORS, CEILING AND FLOOR; FOAM-IN-PLACE URETHANE, 2 INCH

INTERIOR LINING: 1/4" PLYWOOD WALLS, 3/8" PLYWOOD CEILING, AND 1" PLYWOOD FLOOR ATTACHED TO 3" CHANNEL ON ALUM. PAN.

FRAME-UNDERCARRIAGE WITH 11 INCH DROP: P/N 11684443

A SECOND DROP ACCOMMODATES AN AIR MOUNTED KINGPIN ASSEMBLY

DOLLY FRAME: P/N 12307777

DOLLY ASSEMBLY: P/N 12307758

PINTLE ASSEMBLY (TOWING): P/N 8380198

SUSPENSION:
TWO AIR TANDEM,
AXLE TRAVEL 8-1/2 IN. P/N 11684434

AIR RIDE SUSPENSION
INST'N DWG 11681239

AXLES:
TWO, 10,000 LBS. CAPACITY EA.
(20,000 LBS. IN TANDEM
DWG 11684319

KINGPIN: AIR MOUNTED
ASSEMBLY: P/N 11684331

BRAKES: AIR-OVER-HYDRAULIC, INST'N.
UNDERCARRIAGE: DWG 11684421
DOLLY: DWG 11684461

SWING-UP LANDING GEAR; TWO SPEED WITH WHEELS AND PADS
INST'N. DWG 11684300

LEVELING JACKS, ASSEMBLY: P/N 11684674
INST'N. DWG 11684678

LIFTING EYES:
THREE EACH SIDE, P/N 11607444

TIEDOWNS:
5 EACH SIDE, 4 REAR P/N 11637863
2 EACH SIDE, 4 FRONT, P/N 11589937
2 EACH UPPER CORNER POST, P/N 12307792

WHEELS: 4 DUAL, 1 SPARE, P/N 7389621

TIRES: 9 X 20, 8-PLY, NDCC MIL-T-12459

TUBES: ZZ-1-550

ELECTRICAL INSTALLATION:
24 V DC FOR SERVICE LIGHTS, DWG 12307774

"U" FACTOR APPROXIMATELY 0.23 BTU/HR, SQ FT F°.

OTHER FEATURES:
FRONT PLATFORM
INST'N. DWG 11684616
REAR PLATFORM,
INST'N. DWG 11684615
TWO BOARDING LADDERS, P/N 11684408
ONE 12 FT. FOLDING LADDER, P/N 11684609

NO VENT PORTS IN DOORS
TAMPER PROOF DOOR HINGES
EMERGENCY ESCAPE LOCKS:
ONE HYDRAULIC JACK, MS16283-4
EIGHT SPIRIT LEVELS, P/N 11638167
TWO CHOCK BLOCKS, MS52127-2
ONE TIRE CARRIER, P/N 8747239

AIRCRAFT LOADING EQUIPMENT CONSISTING OF:
SKIDS WELDED TO UNDERCARRIAGE
TWO LOADING JACKS, P/N 11646252
TWO JACK STANDS, P/N 11646249
TWO ADAPTERS, P/N 11681435
30 TIE DOWN RINGS, MS21237-1B

SPEEDS:
HIGHWAY 50 MPH MAX.
IMPROVED ROADS 25 MPH MAX.
LOADED 15 MPH MAX.

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS52159-1	8750049

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, VAN: 10 TON, 4 WHEEL, TEST STATION, M995.

MILITARY STANDARD
MS52159(AT)

PROCUREMENT SPECIFICATION
MIL-S-46756

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.