FED SUP CLASS
5340

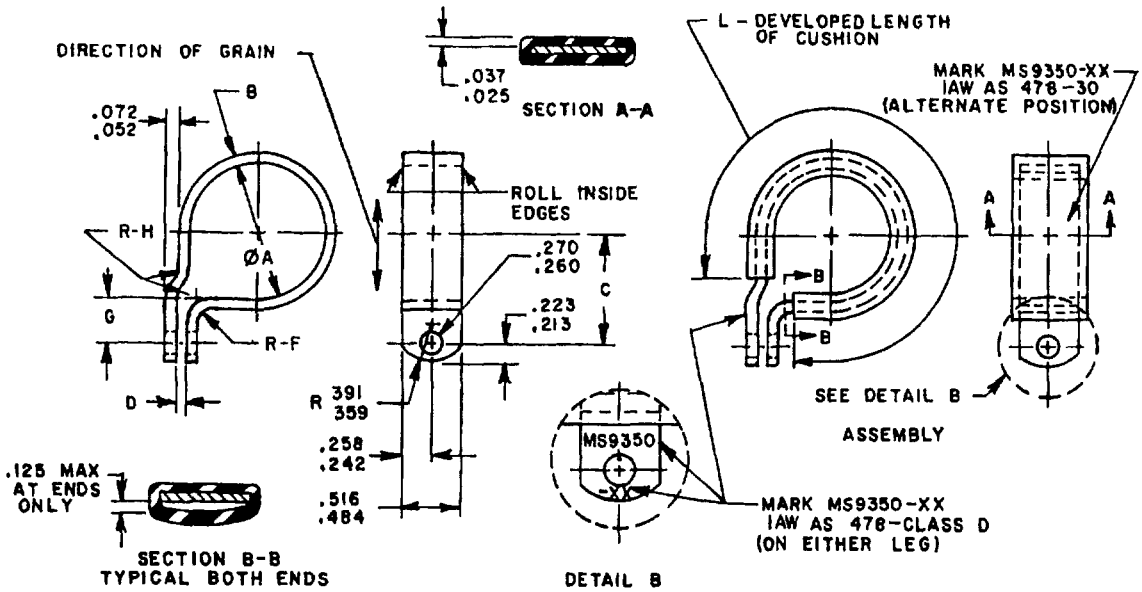


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	TUBE OUTSIDE DIAMETER NOM	ØA BASIC	B ±.006	C ±.010	D	F RADIUS ±.010	G ±.010	H RADIUS ± 010	L + 040 - 000	APPROX WEIGHT LB/100
-01	.125	188	031	.423	.125-.141	062	312	062	.505	77
-02	.188	250	.031	.457	.125-.141	062	312	.062	.679	91
-03	.250	312	031	.498	.125-.141	062	312	.062	.908	1.08
-04	312	375	031	.529	.125-.141	062	312	062	1 097	1 23
-05	375	438	.031	.560	125-.141	062	312	062	1.306	1.37
-06	438	500	.031	.592	.125-.141	062	.312	062	1.515	1 52
-07	500	.562	.031	.623	125-.141	.062	312	062	1.724	1.68
-08	.562	.625	.031	654	125- 141	062	.312	.062	1 930	1.82
-09	625	688	.051	.752	.125-.141	.109	375	094	2 092	3.01
-10	688	750	.051	.783	125- 141	109	.375	094	2 299	3 22
-11	.750	.812	.051	814	.125- 141	109	.375	094	2 506	3 43
-12	.812	875	.051	845	125- 141	109	.375	094	2 721	3 65
-13	875	938	.051	877	.125-.141	109	.375	094	2.929	3.87
-14	938	1.000	.051	.908	.125-.141	109	.375	094	3.136	4.07
-15	1.000	1.062	.051	.939	.125-.141	.109	375	.094	3 343	4.29
-16	1.062	1.125	.051	.970	125-.141	109	.375	.094	3 555	4 50
-17	1.125	1.188	.051	1.002	125-.141	.109	375	094	3 769	4.72
-18	1.188	1.250	.064	1.062	.156-.172	125	.406	125	3.914	5.96
-19	1 250	1.312	.064	1.093	156-.172	.125	406	.125	4 125	6.22
-20	1.312	1 375	064	1.125	.156-.172	125	.406	.125	4.339	6.48
-21	1.375	1.438	.064	1.156	156- 172	.125	.406	125	4.551	6.73
-22	1.438	1 500	.064	1.188	.156-.172	.125	.406	125	4.754	6.99
-23	1.500	1.562	.064	1.219	.156-.172	125	.406	125	5.006	7.36
-24	1.562	1.625	.064	1.250	156-.172	125	406	.125	5.173	7.49
-25	1.625	1.688	.064	1.281	156-.172	125	.406	.125	5.386	7 75
-26	1.688	1.750	.064	1.312	.156- 188	125	406	.125	5 585	7.98
-27	1 750	1.812	.064	1.344	.156-.188	.125	406	.125	5 798	8.24
-28	1.812	1.875	.064	1.375	.156-.188	.125	406	.125	6.011	8.50
-29	1.875	1.938	.064	1.406	.156-.188	.125	.406	.125	6.223	8.77
-30	1.938	2.000	.064	1 438	.156-.188	125	.406	.125	6.436	9.02
-31	2.000	2.062	.064	1.469	.156- 188	125	406	.125	6.643	9.26

(B) ENTIRE STANDARD REVISED

APPROVED 14 JAN 65 REVISED (A) 29 FEB 68 (B) 11 JUN 86

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

USER ACTIVITIES

REVIEWER ACTIVITIES: DLA-IS

AMSC N/A

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust AIR FORCE-11		CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .265 HOLE	MS9350
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1733

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL. CLAMP-CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5510.
CUSHION-POLYTETRAFLUOROETHYLENE IN ACCORDANCE WITH AMS 3651.

2 CLAMP FORM: CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIAMETER OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN +.001. HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION, CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.

3 EDGES: REMOVE BURRS AND SHARP EDGES.

4 PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9350-01

-01 — DASH NUMBER

MS9350 — BASIC MS NUMBER

MS9350-01 INDICATES - CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .265 HOLE, TUBE OUTSIDE DIAMETER NOMINAL 125, BASIC DIAMETER 188

NOTES

1 ALL DIMENSIONS ARE IN INCHES.

2 DO NOT USE UNASSIGNED PART NUMBERS.

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

APPROVED 14 JAN 65 REVISED (8) FOR CHANGES SEE PAGE 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust AIR FORCE- 11	INTERNATIONAL INTEREST	TITLE CLAMP, LOOP, CUSHIONED, JOGGLED, CRES, .265 HOLE	MILITARY STANDARD MS9350
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:15Z
Check the source to verify that this is the current version before use.