MS9691

FED. SUP CLASS
5306

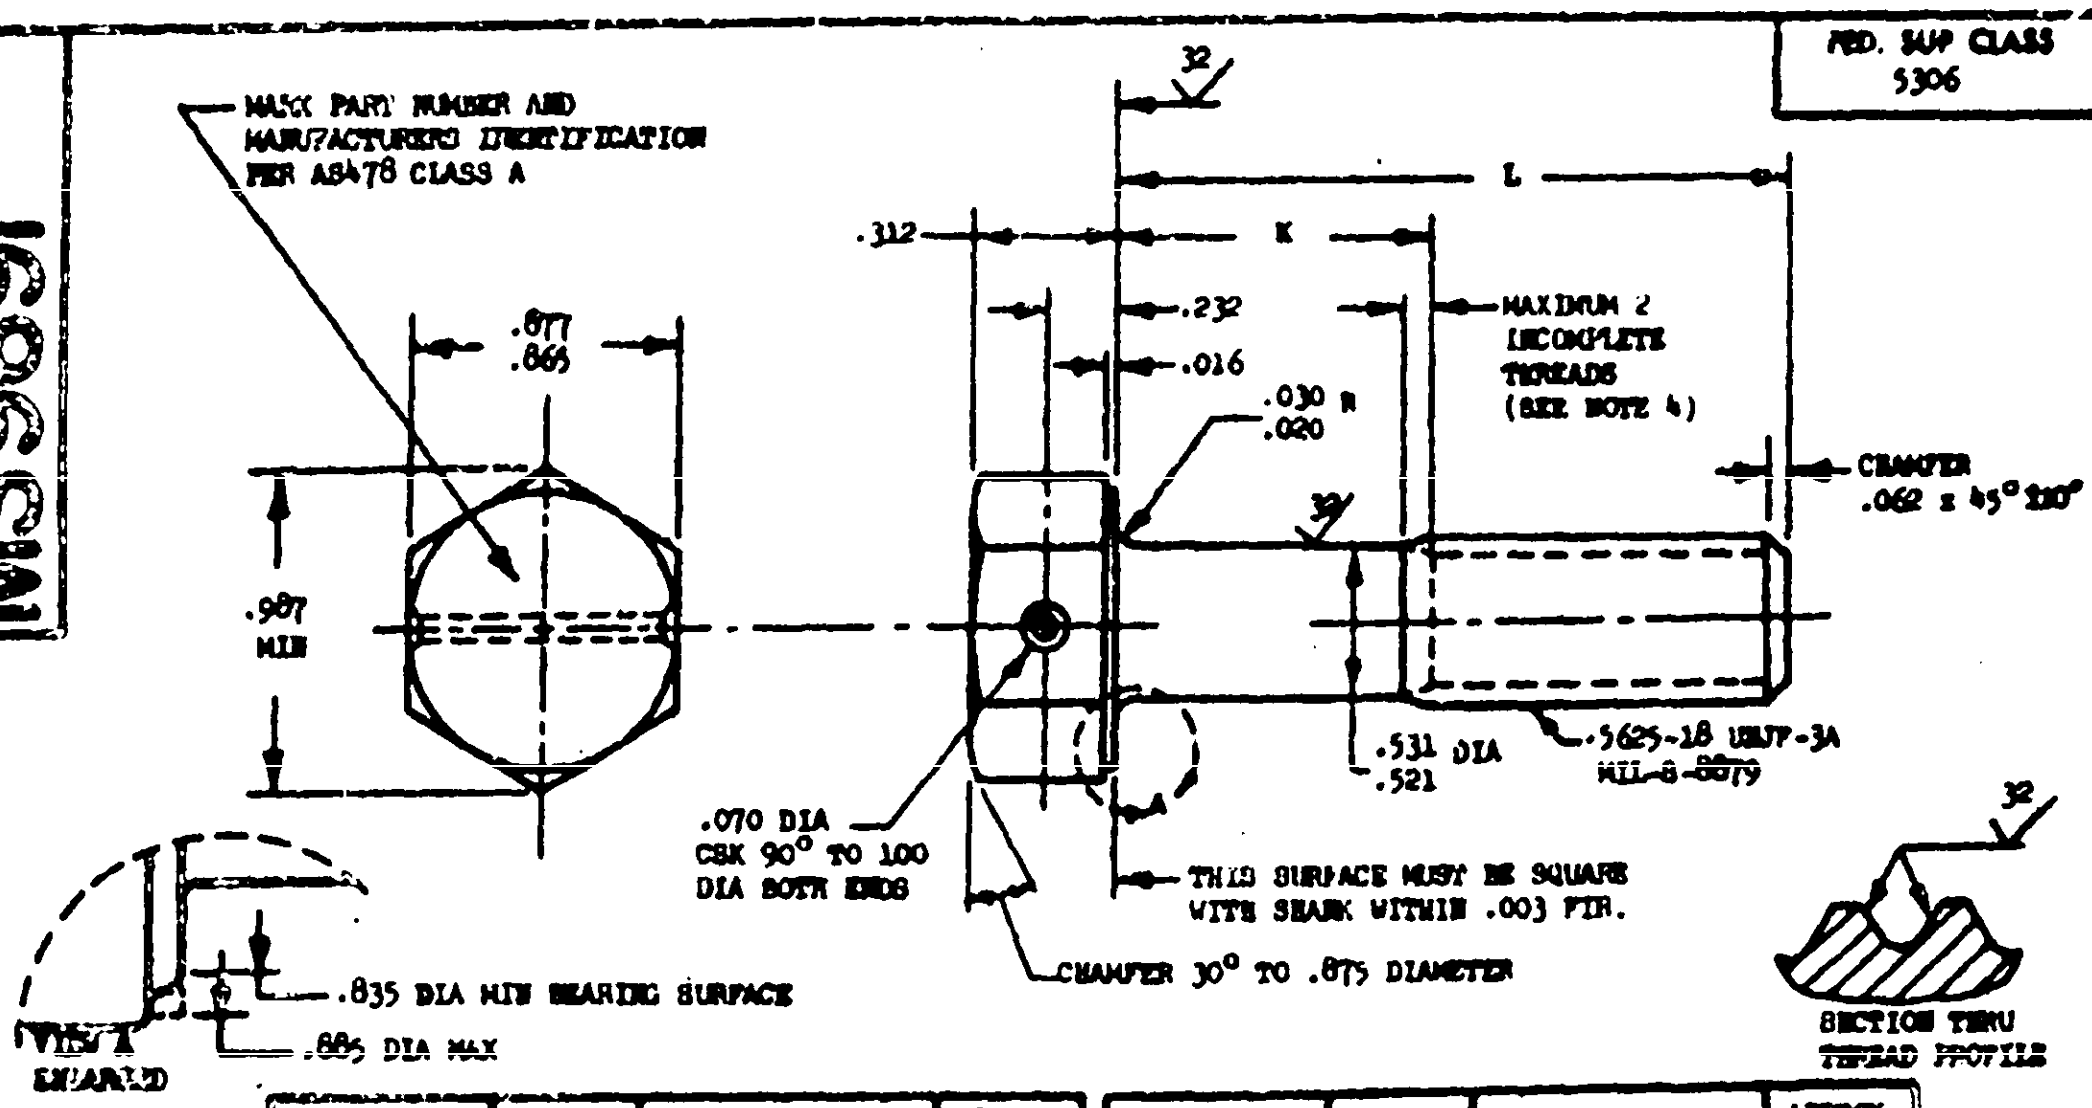
32
L
.312
K
.232
.016
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
.030 R
.020
32
CHAMFER .062 x 45° ±10°
MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION PER AS478 CLASS A
.877
.865
.987 MIN
.531 DIA
.521
.5625-18 UNJF-3A
MIL-S-8879
.070 DIA CSK 90° TO 100 DIA BOTH ENDS
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
CHAMFER 30° TO .875 DIAMETER
.835 DIA MIN BEARING SURFACE
.885 DIA MAX
VIEW A ENLARGED
A
32
SECTION THRU THREAD PROFILE

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9691-04	.875	.113- .133	10.18
MS9691-05	.938	.113- .133	10.56
MS9691-06	1.000	.113- .133	11.94
MS9691-07	1.062	.113- .133	12.32
MS9691-08	1.125	.113- .133	12.70
MS9691-09	1.188	.113- .133	13.08
MS9691-10	1.250	.113- .133	13.47
MS9691-11	1.312	.113- .133	13.85
MS9691-12	1.375	.113- .133	14.23
MS9691-13	1.438	.113- .133	14.62
MS9691-14	1.500	.113- .133	15.00
MS9691-15	1.562	.128- .188	15.38
MS9691-16	1.625	.190- .250	15.77
MS9691-17	1.688	.252- .312	16.15
MS9691-18	1.750	.315- .375	16.53
MS9691-19	1.812	.378- .438	16.91
MS9691-20	1.875	.440- .500	17.30
MS9691-21	1.938	.502- .562	17.68
MS9691-22	2.000	.565- .625	18.06
MS9691-23	2.125	.690- .750	18.83
MS9691-24	2.250	.815- .875	19.60
MS9691-25	2.375	.940-1.000	20.36
MS9691-26	2.500	1.065-1.125	21.13
MS9691-27	2.625	1.190-1.250	21.90
MS9691-28	2.750	1.315-1.375	22.66
MS9691-29	2.875	1.440-1.500	23.43
MS9691-30	3.000	1.565-1.625	24.19

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9691-31	3.125	1.690-1.750	24.96
MS9691-32	3.250	1.815-1.875	25.73
MS9691-33	3.375	1.940-2.000	26.49
MS9691-34	3.500	2.065-2.125	27.26
MS9691-35	3.625	2.190-2.250	28.02
MS9691-36	3.750	2.315-2.375	28.79
MS9691-37	3.875	2.440-2.500	29.56
MS9691-38	4.000	2.565-2.625	30.32
MS9691-39	4.125	2.690-2.750	31.09
MS9691-40	4.250	2.815-2.875	31.86
MS9691-41	4.375	2.940-3.000	32.62
MS9691-42	4.500	3.065-3.125	33.39
MS9691-43	4.625	3.190-3.250	34.15
MS9691-44	4.750	3.315-3.375	34.92
MS9691-45	4.875	3.440-3.500	35.69
MS9691-46	5.000	3.565-3.625	36.45
MS9691-47	5.125	3.690-3.750	37.22
MS9691-48	5.250	3.815-3.875	37.99
MS9691-49	5.375	3.940-4.000	38.75
MS9691-50	5.500	4.065-4.125	39.52
MS9691-51	5.625	4.190-4.250	40.28
MS9691-52	5.750	4.315-4.375	41.05
MS9691-53	5.875	4.440-4.500	41.82
MS9691-54	6.000	4.565-4.625	42.58

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL CADMIUM PLATE PER AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION: AMS 7459.
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

REVISED

APPROVED 8 Jul 71

This standard has been approved by the Department of Air Force and the Department of the Navy and is mandatory for use by those activities. All other activities are requested to employ this standard where suitable.

P.A. AF [illegible]-11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .5625-18 UNJF-3A	MILITARY STANDARD MS9691
PROCUREMENT SPECIFICATION AMS7459		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 OCT 67 672-1 (Lined tracing)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.