MIL-G-44013C
27 April 1988
SUPERSEDING
MIL-G-44013B
23 December 1985

MILITARY SPECIFICATION

GLOVES, HEAT PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers two types of lined heat protective gloves.

1.2 Classification. The gloves shall be furnished in the following types and sizes, as specified (see 6.2).

Type I - Without gauntlet, 11-inch length, one size only
Type II - With gauntlet, 14-inch length, medium and large sizes

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203 - Paper, Kraft, Untreated
V-T-276 - Thread, Cotton

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

DDD-L-20 - Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage: General Specification For
MIL-T-43636 - Thread, Aramid
MIL-T-44100 - Thread, Para-Aramid, Spun, Intermediate Modulus

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

American Association of Textile Chemists and Colorists Technical Manual

Test Method 20 - Fiber Analysis; - Qualitative

(Copies should be obtained from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished are solely for guidance and information (see 6.3). Variations from the document may appear in the samples, in which case the document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Material (see 6.5).

3.3.1 Terry cloth knitted. The outer layer of fabric for the gloves shall be of a knitted terry loop construction having a terry yarn face and a backing yarn. The yarn shall be no coarser than 6/1 nor finer than 20/2 (cotton count) yarn size. Two ends of the yarn shall be used in knitting the terry loop face and one yarn shall be used in knitting the back of the fabric. The color of the fabric shall be the natural color (yellow) of the fiber as produced by the manufacturer. Bleach or a color modifier shall not be used. Additionally, the yarn and fabric requirements shall conform to construction A or B. Testing shall be as specified in 4.4.1.

3.3.1.1 Construction A. The yarns shall be either 100 percent para-aramid fiber or a blend of not more than 20 percent (including manufacturing variability) permanently flame retardant (PFR) rayon fiber with the remaining percentage para-aramid fiber. The fabric shall contain a minimum of 10 wales and 12 courses per inch, a minimum thickness of 0.140 inch, and a minimum weight of 23.5 ounces per square yard.

3.3.1.2 Construction B. The yarns shall be made by wrapping a blend of equal amounts of para-aramid and meta-aramid fibers around a central core of fiberglass. The amount of fiberglass in the total yarn blend shall not exceed 30 percent. The fabric shall contain a minimum of 10 wales and 12 courses per inch, a minimum thickness of 0.124 inch, and a minimum weight of 20.0 ounces per square yard.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

3.3.2 Napped lining. The gloves shall be fully lined with a napped woven cloth made from unbleached carded cotton yarns. The face of the cloth shall be brushed or napped to give a fleeced effect. The weight of the cloth shall be not less than 8.0 ounces per square yard when tested as specified in 4.4.1.

3.3.3 Thread.

3.3.3.1 Cotton. The thread for stitching the lining shall be unbleached cotton, conforming to type IA1 or IB1, ticket No. 30, 3 ply of V-T-276.

3.3.3.2 Thread, aramid and para-aramid. The thread for all operations other than specified in 3.3.3.1 shall be either aramid thread conforming to size E of MIL-T-43636, or para-aramid spun thread conforming to size T-50 of MIL-T-44100. The color of the aramid or para-aramid thread shall be natural.

3.4 Label, identification. Each glove shall have an identification label conforming to type VI, class 5 of DDD-L-20. The item description for use on the label shall be: Gloves, Heat Protective, type I (or type II as applicable). The gloves size shall be included on the labels for the type II gloves. The letters for type and size shall be 1/8 inch high capitals.

3.5 Instruction slip. A printed slip of paper containing the following shall be inserted in one glove of each pair:

INSTRUCTION SLIP

Either glove may be worn on either hand to equalize wear.

3.6 Design. Each pair of gloves shall consist of one right hand and one left hand glove of a Gunn cut, reversible design (see figure 1). The face of the palm and the first (index) and fourth (little) finger shall be one piece. The front of the gauntlet shall be one piece. The thumb shall be one piece and so positioned that the glove can be worn on either hand. The back shall be one piece and shall include the backs of the fingers. In lieu of a one piece back, a separate gauntlet may be used. All outer parts of the glove shall be of knitted terry cloth as specified in 3.3.1.1 or 3.3.1.2. The gloves shall be fully lined. Figure 1 is furnished for information purposes only. If any inconsistencies exist between the written document and the figure, the written document shall govern.

3.6.1 Patterns. The dies or patterns for cutting all parts of the gloves shall be furnished by the contractor and shall be of proper proportions to provide gloves conforming to finished measurements in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the currentversion before use.

3.7 Stitches, seams, and stitchings. All stitches, seams, and stitching shall conform to FED-STD-751. Stitch type 301 shall be used for all stitching except that stitch type 401 may be used as an alternate for stitching the lining. All seams shall be seam types SSa-1 and SSa-2 as applicable, except that seam type SSc-1 shall be used for hemming. Stitching shall be done with not less than 6 nor more than 8 stitches per inch.

~~3.7.1 Type 301 stitching~~. Ends ~~of all stitching shall be backstitched~~ or overstitched 3/8 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so there ~~will be no loose stitching resulting in loose bobbin or top thread, or~~ excessively tight stitching resulting in puckering of the material sewn. The lock shall be embedded in the materials sewn.

3.7.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 3/8 inch back of the end of stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 3/8 inch back of the defective area, continue over the defective area, and continue a minimum of 3/8 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

3.7.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Where stitch type 401 is used, the looper thread shall be on the inside of the gloves. Both ends of all seams or stitching produced with 401 stitch type, when not caught in other seams or stitching shall have a 1/2 to 3/4 inch chain extending beyond each end. All repairs shall be in accordance with 3.7.1.1 a and 3.7.1.1 b.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

3.8 Construction.

3.8.1 Cutting. The glove parts shall be cut with their length direction (cuff to fingertip direction) in the wales direction of the terry cloth and in the warp direction of cotton lining.

3.8.2 Thumbs, fingers, gauntlets, and closing of the terry cloth parts. Thumbs, fingers, gauntlets, and closing shall be inseam sewn with either a single or double row of stitches. When a single row of stitches is used, the stitches shall be 1/4 to 1/2 inch from the edge. When two rows of stitches are used, the first row shall be 1/4 to 3/8 inch from the edge and the second row shall be 1/16 to 1/8 inch from the first row. When a separately pieced gauntlet is used, the cut edges for attaching the hand to the gauntlet shall be inseam sewn with either a single or double row of stitches using the stitching procedures outlined above.

3.8.3 Lining. The lining shall be fully outseamed (SSa-1 seam type) with 1/8 ± 1/16 inch stitch margin and shall be securely attached at tips of fingers and thumb when inserted in the glove. The lining shall fit close to the terry cloth outer shell to avoid all bunching or wrinkling of the lining cloth. The lining shall have the fleece or napped side against the hand.

3.8.4 Attaching label. The label shall be centered on the lining of the palm side approximately 1/2 inch below glove opening and stitched on four sides using seam type SSa-1.

3.8.5 Hemming. The top of the gauntlet or cuff portion of the terry cloth and the napped lining shall be hemmed by turning in both cloths not less than 1/2 inch and stitching through both cloths (SSc-1 seam type) not more than 3/8 inch down from top of the gauntlet or cuff.

3.9 Pairing. The gloves shall be paired and tacked together with thread, 1/2 to 1 inch from the finished top, at the closing seam of gauntlet. Tacking shall be done with not less than two stitches using a ply thread which will permit the gloves to be pulled apart without tearing the cloth. As an alternate each pair of gloves may be tacked with a non-corrosive soft metal staple provided the gloves can be separated without damaging the cloth.

3.10 Measurements. The measurements of the finished glove shall conform to table I. The measurements shall be made with the glove laid out flat with no tension.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the currentversion before use.

TABLE I. Measurements of finished gloves

Location	Dimensions (inches) Type I	Type II Large	Type II Medium	Tolerance (inch)
Overall length (tip of 2nd finger to top of cuff)	11	14	14	+1, -1/2
Width across palm at thumb crotch	5-1/2	5-1/2	5	+1/2, -1/4
Width across cuff at opening	6-3/4	6-3/4	6	+1/2, -1/4
Length of thumb Type I (tip to thumb crotch)	3	--	--	+1/2, -1/4
Type II (tip to gauntlet seam)	--	4-1/2	4	+1/2, -1/4
Length of middle finger (tip to base of finger)	3-1/2	3-1/2	3-1/2	+1/4, -1/4

3.11 Replacement of defective components. During the manufacturing process, components having material defects or damages that are classified as defects in 4.4.2, shall be removed from production and replaced with non-defective and properly matched components.

3.12 Workmanship. The finished gloves shall conform to the quality of product established by this document and the occurence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.2), it shall be examined for the defects specified in 4.4.2, 4.4.3, and table III. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document. In

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

addition, testing shall be performed on the components listed in table II. Unless otherwise indicated, the test methods listed in table II shall be in accordance with FED-STD-191. The lot size shall be expressed in units of 1 yard. The sample unit shall be 1/2 linear yard of each cloth. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any requirement specified. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE II. Component tests

Component	Characteristic	Requirement para.	Test Method
Terry cloth	Fiber identification	3.3.1	1/
	Fiber blend (when applicable)	3.3.1	2/
	Yarn size	3.3.1	2/
	Wales per inch	3.3.1	5070
	Courses per inch	3.3.1	5070
	Thickness	3.3.1	5030
	Weight	3.3.1	5041
Napped lining	Fiber identification	3.3.2	1200
	Weight	3.3.2	5041

1/ AATCC Test Method 20 (see Solubility of Fibers).

2/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.4.2 End item visual examination. The end item shall be examined for the defects listed in table III. The lot size shall be expressed in units of gloves. The sample unit shall be one completely fabricated glove and the selection shall be by pairs. Defects for pairing shall be classified as a single defect. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects

Examine	Defect	Classification	
		Major	Minor
Pairing	Gloves not properly mated, i.e., two rights or two lefts submitted as pairs	X	
	Not tacked together or not tacked as specified		X
Color (applicable to all components)	Not as specified		X
Cleanness	Any spot or stain		X
Design	Any characteristic not in accordance with specified requirements (unless otherwise classified herein)	X	
Material (general)	Any component not fabricated of specified material	X	
Terry cloth	Any cut, hole, tear, smash, rip, or mend	X	
	Any weakened area due to knitting deficiency that can be expected to develop into a hole	X	
	Any cloth defect affecting serviceability but not seriously		X
	Any cloth defect seriously affecting serviceability	X	
	Area with no terry loops	X	
Napped lining	Any cut, hole, tear, or mend	X	
	Slubby yarn or other type weave defect in material		X
	Lining not napped or area of no nap		X
Construction and workmanship applicable to all components and assemblies unless otherwise indicated herein	Any component missing	X	
	Any component misplaced or any operation omitted or not properly performed, seriously affecting serviceability e.g., fingers twisted or distorted	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Construction and workmanship, applicable to all components and assemblies unless otherwise indicated herein - continued	Any component misplaced or any operation omitted or not properly performed, affecting serviceability but not seriously		X
	Needle chews	X	
	Not assembled as specified	X	
	Any component not securely attached, seriously affecting serviceability	X	
	Any component not securely attached, affecting serviceability but not seriously		X
	Not specified seam or stitch type	X	
Seams and stitching	Any row of stitching omitted	X	
	Any open seam:		
	- on single stitched seam	X	
	- on both rows of a double stitched seam	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur.		
	Repair of seam not as specified		X
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight stitch tension resulting in cutting of cloth or breaking of stitches when normal pull is applied	X	
	Thread breaks backstitched less than 3/8 inch		X
	End of 301 stitching not backstitched or backstitched less than 3/8 inch when not caught in another row of stitching		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Seams and stitching - continued	End of 401 stitching when not caught in other seam or stitching:		
	- chain does not extend beyond each end	X	
	- chain extends beyond each end but less than 1/2 inch or more than 3/4 inch		X
	Any part caught in unrelated row of stitching	X	
	One stitch per inch less than specified		X
	Two or more stitches per inch less than specified	X	
	More than the specified maximum number of stitches per inch resulting in damage to assembly	X	
	Gage or margin of stitching irregularly accomplished, seriously affecting serviceability	X	
	Gage or margin of stitching irregularly accomplished, affecting serviceability but not seriously		X
	Puckering or pleating seriously affecting serviceability	X	
	Puckering or pleating affecting serviceability but not seriously		X
Assembly detail	Any part of assembly not firmly or properly affixed causing discomfort to user, e.g., lining seriously wrinkled or excessive bulk in crotch or fingers, etc.	X	
	Three or more thread ends not trimmed to 1/4 inch		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the currentversion before use.

TABLE III. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Identification label and instruction slip	Missing, incomplete, incorrect, illegible	X	
	Not specified type, not in proper location, or not accomplished as specified		X

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in 3.10. Any dimension that is not within the established tolerance shall be classified as a defect. The lot size shall be expressed in units of gloves. The sample unit shall be one finished glove and the selection shall be by pairs. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling
	Bulged or distorted container
Content	Number per container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.1.1 Level A packing. Twenty pairs of type I gloves or sixteen pairs of type II gloves of one size only, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. The gloves shall be packed on edge within a shipping container. The arrangement shall be fourteen pairs, with the glove length parallel to the end panels and against a side panel. The remaining pairs shall be placed in the unfilled space, with the glove length parallel to the side panels. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in ~~accordance with MIL-L-35078 for the type and class of loads specified~~ (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level B packing. Twenty pairs of type I gloves or sixteen pairs of type II gloves of one size only, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. The gloves shall be packed on edge within a shipping container. The arrangement shall be fouteeen pairs, with the glove ~~length~~ parallel ~~to the end panels and against a side panel. The remaining~~ pairs shall be placed in the unfilled space, with the glove length parallel to the side panels. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.4.

5.1.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix PPP-B-636 except that the inspection shall be in accordance with 4.4.4.

5.1.3 Commercial packing. Gloves shall be packed in accordance with ASTM D 3951.

5.2 Palletization. When specified (see 6.2), gloves packed as specified in 5.1.2 and 5.1.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L, or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The gloves are intended to be used by welders, steam fitters, and other workmen handling hot or cold tools or materials, to protect hands from heat and cold.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article is required (see 3.1, 4.3, and 6.4).
c. Type and size required (see 1.2).
d. Selection of applicable levels of packing (see 5.1).
e. Type and class of unit load required (see 5.1.1).
f. When ~~weather-resistant grade fiberboard shipping containers are~~ required for level B packing (see 5.1.2.1).
g. When palletization is required (see 5.2).

6.3 Guide samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

6.6 Subject term (key word) listing.

Gloves, heat protective
Gloves, workmen's

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
DLA - CT

User activities:

Navy - YD, SH, MC

Preparing activity:

Army - GL

Project No. 8415-0613

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.

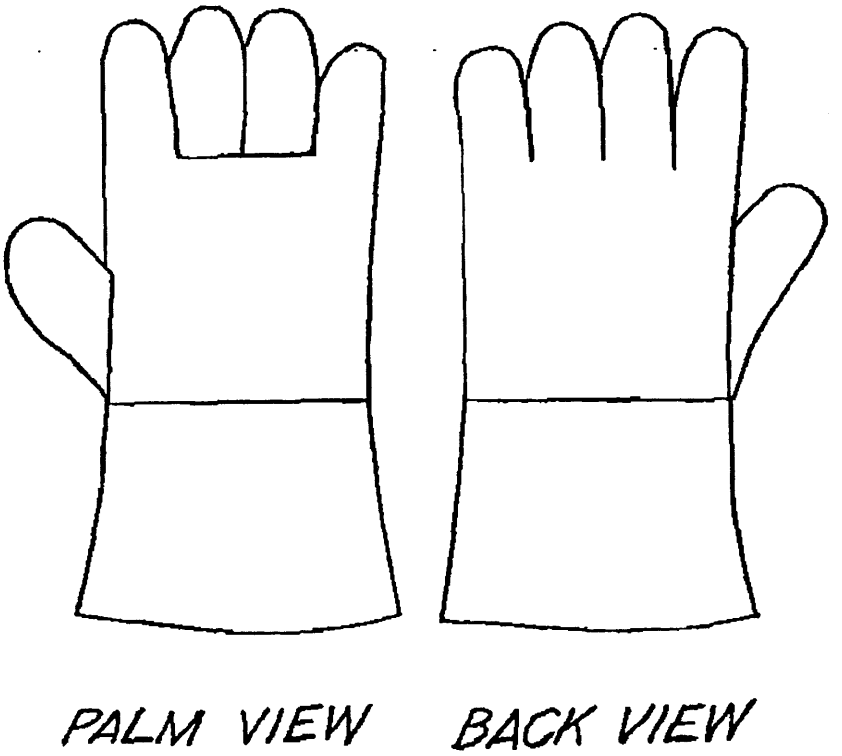


FIGURE 1. Gloves, heat protective, Gunn cut, reversible.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:22Z
Check the source to verify that this is the current version before use.