# MILITARY SPECIFICATION

## JACKET, WOMAN'S, SUMMER, WARPKNIT (LONG SLEEVE)

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers a jacket made of linen look, polyester knitted material

1.2 Classification. The jacket shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

| Short | Regular | Long |
|---|---|---|
| 6 | 6 | 6 |
| 8 | 8 | 8 |
| 10 | 10 | 10 |
| 12 | 12 | 12 |
| 14 | 14 | 14 |
| 16 | 16 | 16 |
| 18 | 18 | 18 |
| 20 | 20 | 20 |
| 22 | 22 | 22 |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| V-T-280 | - | Thread, Buttonhole, Cotton, Gimp |
| UU-P-268 | - | Paper, Kraft, Wrapping |
| DDD-L-20 | - | Label: For Clothing, Equipage, and Tentage (General Use) |
| PPP-B-636 | - | Boxes, Shipping, Fiberboard |

MILITARY

| | | |
|---|---|---|
| MIL-B-3461 | - | Button, Insignia, Metal, Uniform and Cap |
| MIL-T-43548 | - | Thread, Polyester, Cotton-Covered |
| MIL-T-43938 | - | Cloth, Knitted, Warp, Linen Look, Polyester |

STANDARDS

FEDERAL

| | | |
|---|---|---|
| FED-STD-191 | - | Textile Test Methods |
| FED-STD-751 | - | Stitches, Seams and Stitchings |

MILITARY

| | | |
|---|---|---|
| MIL-STD-129 | - | Marking for Shipment and Storage |
| MIL-STD-1608 | - | Provisions for Evaluating Quality of Coats, Women's Dress |
| MIL-STD-1188 | - | Commercial Packaging of Supplies and Equipment |

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. A sample, when furnished, is solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

3.1.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

3.2 Materials.

3.2.1 Basic material. The basic material for the jacket shall be a Medium Green 388, polyester, linen look, warpknit cloth conforming to MIL-C-43938.

3.2.2 Fusible interlining. The interlining shall be a white, preshrunk, 100 percent cotton plain weave cloth. It shall be fused to the basic material with an evenly distributed dot system of polyvinyl chloride adhesive applied to one side of the cloth in accordance with good commercial practice. The fusible interlining cloth shall meet the following requirements when tested as specified in 4.4.1:

| | |
|---|---|
| Weight, oz. per sq. yd. | 3.3 - 4.5 |
| Weave | Plain |
| Yarns per inch (min): | |
| Warp | 62 |
| Filling | 52 |
| Bond strength, oz. per 1 inch width (min) | 32 |

The bond strength shall be determined after 5 launderings. There shall be no bubbling or delamination after the 5 launderings.

3.2.2.1 Fusing conditions. The fabric shall be fused with either of the fusing presses specified, set within the following limits. There shall be no "strike through" of the adhesive after fusing.

| | Fusing presses | | | |
|---|---|---|---|---|
| | Electrically heated | | Continuous fusing | |
| | Min. | Max. | Min. | Max. |
| Temperature (between pressing surfaces) | 300°F | 325°F | 275°F | 300°F |
| Pressure (between pressing surfaces)psi | 3 | 4 | Medium | |
| Pressing time, seconds | 10 | 12 | 8 | 10 (dwell) |

NOTE: The above were established to include requirements of several fusing materials. For optimum results with the particular fusible style and press used, specific machine settings should be obtained from the contractor of the fusible material.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

3.2.3 Lining. The lining material shall be a 100 percent polyester cloth, dyed Medium Green 414 and shall meet the following physical requirements:

| | |
|---|---|
| Weight, oz. per sq. yard | 1.25 to 1.75 |
| Weave | Plain |
| Yarns per inch (min): | |
| Warp | 105 |
| Filling | 90 |
| Breaking strength, lbs, (min): | |
| Warp | 84 |
| Filling | 68 |
| Tearing strength, lbs. (min): | |
| Warp | 2.5 |
| Filling | 2.0 |
| Shrinkage, percent (max): | |
| Warp | 2.0 |
| Filling | 2.0 |

The lining material shall show colorfastness to laundering (after 3 cycles), crocking and perspiration, equal to or better than the standard sample. When no standard is available, the cloth shall show "good" fastness to laundering, crocking and perspiration. Testing for all requirements shall be as specified in 4.4.1.

3.2.4 Thread. The thread for all seaming and stitching shall be cotton-covered polyester thread, ticket numbers 50, 2 or 3 ply or 70, 2 ply conforming to MIL-T-43548. The thread shall be dyed to match the basic material.

3.2.5 Gimp. The gimp for reinforcing the buttonholes shall be cotton, type I or II, size No. 8 of V-T-280. The gimp shall be dyed to match the basic material.

3.2.6 Buttons. The buttons shall be gold plated metal, regular shank with ring or split pin toggles, size 30-ligne for front closure and hopper back, size 25-ligne for the shoulder loops conforming to type I, style 2, class A of MIL-B-3461.

3.2.7 Labels. Each jacket shall have a size and a combination identification and instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements shall apply.

3.2.7.1 Size label. The size label shall be class 2.

3.2.7.2 Combination label. The combination identification and instruction label shall conform to classes 1 and 3. The coating requirements of the class 3 label shall apply. The label shall contain the following information.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

JACKET, WOMAN'S, SUMMER, WARPKNIT (LONGSLEEVE)

LAUNDERING INSTRUCTIONS

MACHINE WASH

-Use wash and wear cycle.
-Wash with warm water (120°F) using soap or mild detergent.
-DO NOT STARCH OR BLEACH
-Dry in tumble dryer at warm setting. Remove immediately at end of drying cycle.
NOTE: It is preferred that the garment be slightly damp rather than completely dried.
-Shape and hang on wooden hanger.

HAND WASH

-Hand wash in warm water with soap or mild detergent.
-DO NOT WRING OR TWIST
-DO NOT STARCH
-Place wet jacket on wooden hanger and hang to dry.

3.3 Design. The jacket is partially lined and has a notched collar, long sleeves, shoulder loops and inside hanging pockets with pocket flaps. The jacket has modified princess lines with a 4-button front closure, semi-cutaway effect.

3.4 Figure. Figure 1 is furnished for information only. In the event of any inconsistencies between the specification and the figure, the specification shall control.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide for the following seam allowances:

1/4 inch for:
- Collar construction and collar setting
- Attaching facing to front and lining to facing
- Pocket flap construction and bagging pockets

3/8 inch for:
- Sleeve setting
- Shoulder loop construction

1/2 inch for:
- Side front and side back seams
- Shoulder seams and making sleeves of jacket and lining

3/4 inch for:
- Side seams of jacket and lining



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

3.5.1 Pattern parts. The component parts of the jacket shall be cut from materials specified in accordance with the pattern parts listed in table I.

TABLE I. Pattern parts

| Material | Pattern nomenclature | Cut parts |
|---|---|---|
| Polyester, linen look knitted cloth (see 3.2.1) | Front | 2 |
| | Side front | 2 |
| | Side back | 2 |
| | Center back | 1 |
| | Undersleeve | 2 |
| | Top sleeve | 2 |
| | Top collar | 1 |
| | Undercollar | 1 |
| | Shoulder loop | 4 |
| | Front facing | 2 |
| | One piece pocket flap | 2 |
| | Welt pocket | 2 |
| | Pocket | 2 |
| | Eyelet reinforcement piece | 1 |
| Fusible interlining (see 3.2.2) | Front facing interlining | 2 |
| | Pocket flap interlining | 2 |
| | Shoulder loop interlining | 2 |
| | Collar interlining | 1 |
| Polyester, lining cloth (see 3.2.3) | Front lining | 2 |
| | Back lining | 1 |

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in table II, shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the jacket. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams shall result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch,



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

except on labels where the overlap shall be not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

3.6.4 Buttonholes. The buttonholes shall be eyelet-end, square-bar, cut-first type worked over gimp with the ends of the gimp pulled through to the underside. The ends of the buttonhole stitching shall be tacked by hand or by machine, the width of the bar section, catching the ends of the buttonhole stitching and the gimp. The finished cut length of the buttonhole shall be 3/4 inch to 1 inch. The purl of the buttonhole shall be on the outside of the jacket.

3.7 Manufacturing operations requirements. The jackets shall be manufactured in accordance with operations shown in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible providing the thread does not show on the finished jacket. The width of overedging specified in table II shall be 3/16 to 1/4 inch.

3.8 Shade and size marking. The component parts of the jacket shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(1) Metal fastening devices.

(2) Sew-on tickets.

(3) Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material upon removal of the tickets.

3.9 Pressing. Pressing, as required in table II, shall be done with a heated pressing iron or machine set at a suitable temperature for synthetics. Any additional underpressing to facilitate manufacture is permissible.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

Table II

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | [illegible] |
| 1. | Cutting (see 6.4).<br><br>a. Spread the material on the cutting table without tension so that the knit loops of each layer of fabric all face in one direction. Place the patterns on the fabric so that directional lines are in the warp direction and the arrows are pointing in the direction of the loop as indicated on figure 3.<br>NOTE: The direction of the loop can be observed on the backside of the fabric.<br><br>b. Cut the jacket in strict accordance with the patterns furnished, which show directional lines, size, and notches for proper assembly.<br><br>c. Cut a one piece undercollar on the bias according to directional line on pattern.<br><br>d. Cut all parts of the jacket from the same piece of material except undercollar, pocket, and eyelet reinforcement strip, which may be cut from ends.<br><br>e. Cut the cloth for lining the jacket in accordance with patterns furnished.<br><br>f. Cut fusible interlining in accordance with patterns furnished. | | | | | | |
| 2. | Replacement of damaged parts.<br><br>Care shall be exercised during the spreading, cutting and maufacturing operations to assure that material defects and damages, as classified in MIL-STD-1608, are excluded and replaced with non-defective and properly matched material. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 3. | Marking.<br><br>Mark or ticket all parts to insure a uniform shade and proper assembly of the jacket. | | | | | | |
| 4. | Make sleeves. | | | | | | |
| | a. Join sleeve underarm and back arm seam as marked on patterns. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Press seams open. | | | | | | |
| 5. | Fold hem inside of sleeves, and blind-stitch partially penetrating the body fabric. The finished hem shall be 2 ± 1/4 inches. | 103 or<br>106 or<br>Hand | EF1-1 | 3-4<br><br>4-6 | 70<br><br>50 | | |
| 6. | Make shoulder loops. | | | | | | |
| | a. Position fusible interlining on top ply of shoulder loop and fuse. | | | | | | |
| | b. Place underply and top ply of shoulder loops face to face and stitch. | 301 or<br>401 | SSa-1<br>SSa-1 | 8-12<br>8-12 | 50<br>50 | 50<br>70 | |
| | c. Trim corners, turn and force out points and edge stitch 5/16 ± 1/32 inch from edge. | 301 | SSe-2(b) | 10-12 | 50 | 50 | |
| 7. | Make collar. | | | | | | |
| | a. Place fusible interlining on top collar ply 1/16 inch from edges and fuse. | | | | | | |
| | b. Position the undercollar on top collar (face to face) and stitch top and side edges. | 301 or<br>401 | SSe-2(a)<br>SSe-2(a) | 8-12<br>8-12 | 50<br>50 | 50<br>70 | |





NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 7. | Make collar. (cont'd) | | | | | | |
| | c. Trim corners, turn and force out points, or press collar points on a collar pointing machine. | | | | | | |
| | d. Edge stitch collar 5/16 ± 1/32 inch from edge. | 301 | SSe-2(b) | 10-12 | 50 | 50 | |
| 8. | Join side fronts to fronts. | | | | | | |
| | Finished appearance. Bustlines on both sides shall be alike with parts carefully joined to produce a smooth appearance. | | | | | | |
| | a. Join side front to front, matching notches with an equal distribution of bust fullness between notches. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Press the bustline seams of the front parts flat and toward the front, without any pressing impressings. | | | | | | |
| 9. | Make two pocket flaps. | | | | | | |
| | a. Position fusible interlining to the underside of the top ply portion and fuse. | | | | | | |
| | b. Seam sides of flaps, trim, turn and work out points. | 301 or 401 | SSe-2(a) | 8-12 | 50<br>50 | 50<br>70 | |
| | c. Edge stitch 5/16 ± 1/32 inches from turned edges. The under flaps shall not show on outside of flap. | 301 | SSe-2(b) | 10-12 | 50 | 50 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 9. | Make two pocket flaps. (cont'd) | | | | | | |
| | d. Press flap. Flaps shall be uniform in appearance and shall lie flat and smooth without twists or puckers. | | | | | | |
| 10. | Make pockets. | | | | | | |
| | Finished appearance. The pockets shall be in alignment and uniform in width and depth. There shall be no raw edges or pleats at the end of the openings. The flaps shall be uniform in placement, shape and size. | | | | | | |
| | a. Mark fronts for position of pocket flaps as indicated by patterns. | | | | | | |
| | b. Position flap on the outside of the jacket above top of pocket as marked and stitch 1/4 inch seam through all plies the length of the flap. | 301 | LSbj-1 | 8-12 | 50 | 50 | |
| | c. Place welt pocketing on the outside of the jacket below pocket line, with the raw edge abutting the raw edges of flap and stitch 1/4 inch seam through all plies the length of the pocket as indicated by notches on the welt pocket pattern. | 301 | LSbj-1 | 8-12 | 50 | 50 | |
| | d. Cut opening through jacket on the pocket line and tongue notch the ends of the pocket opening. | | | | | | |
| | e. Turn the welt pocketing through the cut opening forming a 1/4 inch welt, and raise stitch seam at bottom of welt 1/16 to 1/8 inch from edge. | 301 | SSc-2(b) | 8-12 | 50 | 50 | |





NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

| NO. | | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 10. | Make pockets. (cont'd) | | | | | | |
| | f. Stitch cloth pocketing to flap seam allowance as indicated by notches 1/8 inch from raw edge matching the notches. | 301 | LSbj-1 | 8-12 | 50 | 50 | |
| | g. Turn the cloth pocketing through the cut opening and tack ends of pocket opening at a 45 degree angle. Tacking shall not be visible on the outside of the jacket. | 301 | SSa-1 | 8-12 | 50 | 50 | |
| | h. Place a vertical 3/16 to 1/4 inch bartack at each end of the pocket opening. | Bartack | | 21 stitches | 50 | 50 | |
| | i. Finish the hanging pocket by safety-stitching all the raw edges together. | 515 or 516 or 519 | SSa-1 | 8-12 | 50 (chain) | 70 | |
| | | | SSa-1 | 8-12 | 70 (overedge) | 70 | |
| 11. | Fuse facings. | | | | | | |
| | Position interlining to the underside of the facing, 1/16 to 1/8 inch from raw edge and fuse. | | | | | | |
| 12. | Reinforce left front and make eyelets. | | | | | | |
| | a. Position a reinforcement piece on the left front in accordance with notches on pattern to reinforce eyelets and stitch 1/8 to 3/16 inch from front edge. | 301 | SSa-1 | 8-12 | 50 | 50 | |
| | b. Make four 1/8 to 3/16 inch diameter eyelets on left front through the reinforcement positioned as indicated on front pattern. The inside edge of the eyelet shall be 3/4 inch from the edge of the finished jacket. The eyelets shall be through the jacket front and eyelet reinforcement piece only, not through the facing. | Eyelet | | 30-38 per eyelet | 50 | 50 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 13. | Assemble lining, facings and combination label. | | | | | | |
| | a. Fold center back as marked on patterns and stitch 1/2 ± 1/16 inch from fold, down to 1-1/4 ± 1/8 inch from the neck area, continue the stitching across the fold, and backtack. | 301 | OSf-1 | 8-12 | 50 | 50 | |
| | b. Join back to fronts at sides. | 301 | LSq-1(a) | 8-12 | 50 | 50 | |
| | c. Turn seam allowance of side seam toward the back and raise stitch 1/16 to 1/8 inch from the seam, catching the seam allowance. | 301 | LSq-1(a) | 8-12 | 50 | 50 | |
| | d. Make a 3/16 to 1/4 inch hem on lining bottom with raw edge turned in. | 301 | EFb-1 | 8-12 | 50 | 50 | |
| | e. Seam front lining to facing 1/4 inch from edge. | 301 | SSa-1 | 8-12 | 50 | 50 | |
| | f. Overedge the left and right facing and lining with the stitching continued to the bottom of the facings. The combination label may be caught in the stitching of the left facing 2 ± 1/4 inches from the finished bottom, stitch the remaining three sides of the label.<br>- or -<br>Position the label on left facing 2 ± 1/4 inches from the finished bottom and 1/2 to 3/4 inch from finished front and stitch on all four sides. Stitching shall not be visible on outside of jacket. | 502 or 503 and 301<br><br><br><br>301 | SSa-1<br>SSa-1<br>LSbj-1<br><br>LSbj-1 | 8-12<br>8-12<br><br><br>8-12 | 70<br>50<br><br><br>70 | 70<br>50<br><br><br>70 | |
| | g. Join back to facings and front lining at the shoulder, according to marks on pattern. | 301 | SSa-1 | 8-12 | 50 | 50 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 14. | Join side backs to backs. | | | | | | |
| | Finished appearance. The contour of the waist and hip line shall be maintained in the seaming. | | | | | | |
| | a. Join side back to back matching notches with an equal distribution of fullness between notches. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Press the side back joining seams flat and towards the center back, without any pressing impressions. | | | | | | |
| 15. | Join side seams. | | | | | | |
| | a. Join fronts to back at sides matching notches. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Press side seam open. | | | | | | |
| 16. | Join shoulders. | | | | | | |
| | a. Join shoulders. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Press shoulder seam open. | | | | | | |
| 17. | Stitch facings to fronts. | | | | | | |
| | a. Place fronts and facing face to face, and stitch facings to fronts from lapel notch across top of lapel, down front and across bottom to back edge of facing. | 301 or<br>401 | SSe-2<br>SSe-2 | 8-12<br>8-12 | 50<br>50 | 50<br>70 | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 17. | Stitch facings to fronts. (cont'd) | | | | | | |
| | b. Trim corner if necessary and turn facings. Work out lapel points, with the seams turned toward the facing, and the bottom hem turned up, stitch edges of lapels and fronts 5/16 ± 1/32 inch from edge; stitching to extend across bottom width of facings, fronts and side fronts terminating at the side seams. Facings shall not be exposed beyond edge of fronts to break line. | 301 | SSe-2(b) | 10-12 | 50 | 50 | |
| 18. | Hem bottom of coat. | | | | | | |
| | Finished appearance. The hem shall be uniform in width, devoid of twists or pleats and the seams shall be matched. | | | | | | |
| | a. Turn under the bottom of jacket forming a 1-1/2 ± 1/8 inch hem and blind stitch bottom. The hem shall start and finish under the front facings 7/8 ± 1/8 inch. The felling stitches shall not be visible on outside of jacket. | 103 or 106 | EF1-1 | 3-4 | 70 | | |
| 19. | Tack front facing. | | | | | | |
| | Tack bottom of facing to hem allowance or tack facing to bottom hem turn-up by machine. | Hand or 103 | - | 6-8 per tack | 50 | | |
| 20. | Attach size label. | | | | | | |
| | Position size label at center back, and stitch 1/8 to 3/16 inch from raw edge of neck line. | 301 | SSa-1 | 8-12 | 50 | 50 | |





NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 21. | Set collar.<br><br>Finished appearance. The collar shall be carefully stitched to the jacket with notches matching and fullness carefully eased to provide a smooth collar without pleats or tucks.<br><br>a. Fold facing back at notch and yoke linings. | | | | | | |
| | b. Insert collar between fronts, facings and linings with the ends of the collar even with notches at steps. Stitch through all plies from notch of lapel to opposite lapel notch. The shoulder seam allowance of the back and lining shall face toward the center back. The collar ends shall be backtacked at each end and shall not be uneven in length by more than 1/8 inch.<br><br>NOTE: The size label may be inserted at this time (see operation 20.). | 301 | SSj-1 | 8-12 | 50 | 50 | |
| 22. | Set shoulder loops.<br><br>Finished appearance. The shoulder loops shall be smooth, flat and uniform. The point of loop shall be 1/16 to 3/16 inch from collar seam and shall be centered on shoulder seams.<br><br>a. Position the center of shoulder loops to shoulder seams of jacket according to notches on patterns. | | | | | | |
| | b. Single stitch loops to armhole 1/8 to 3/16 inch from raw edge. | 301 or<br>401 | SSa-1<br>SSa-1 | 8-12<br>8-12 | 50<br>50 | 50<br>70 | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 23. | Set in sleeves.<br><br>Finished appearance. The fullness shall be carefully distributed between notches to provide a smooth armhole without pleats or tucks. The line of stitching shall not be irregular. | | | | | | |
| | a. Stitch sleeve to armhole with notches matched, catching the shoulder loops in the stitching. The ends of the stitching shall overlap not less than 1 inch. | 401 | SSa-1 | 8-12 | 50 | 70 | |
| | b. Overedge stitch the armhole catching all plies of material. | 502 or 503 | EFd-1 | 8-12 | 70 | 70 | |
| 24. | Make buttonholes.<br><br>Finished appearance. The buttonholes shall be clean cut and the stitching shall be securely caught through the front and facing. | | | | | | |
| | a. Make four horizontal buttonholes on right front to correspond to the eyelets. The inside edge of the buttonhole eyelets shall be 3/4 to 7/8 inch from the jacket edge. | Buttonhole | | 48-56 | 50 | 50 | |
| | b. Bartack end of buttonhole (catching gimp) with 1/4 inch (maximum) bartack. | Machine or<br><br>Hand | | 21 per bartack<br>6-8 double thread | 50<br>50 | 50 | |





NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 25. | Clean jacket. | | | | | | |
| | a. Trim all ends of stitching and remove loose threads. | | | | | | |
| | b. Remove all spots, stains and shade tickets. | | | | | | |
| 26. | Press jacket. | | | | | | |
| | Press the bottom and sleeve hems, shoulder loops, collar, gorge, pockets and front and back of jacket, press out creases, wrinkles, and remove gloss marks. Sleeves shall not be creased. | | | | | | |
| 27. | Attach buttons. | | | | | | |
| | a. Insert four buttons in eyelets and secure with toggles. | | | | | | |
| | b. Sew buttons on shoulder 5/8 ± 1/8 inch from loop point, through shoulder loops and shoulder of jacket. The loops shall not be distorted in any way. | 301 or 101 or Hand | | 10-14 per button<br>4 per button double thread | 50<br>50 | 50 | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

3.10 Measurements. The finished measurements of the jacket shall conform to the measurements shown in table III. The tolerance for all measurements shall be as indicated.

TABLE III. Finished measurements (in inches)

| Size | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | Tolerance |
|---|---|---|---|---|---|---|---|---|---|---|
| 1/2 bust 1/ | 16-1/2 | 17-1/4 | 18 | 18-3/4 | 19-1/2 | 20-1/4 | 21-1/4 | 22-1/4 | 23-1/4 | ± 3/8 |
| Cross back 2/ | 13-7/8 | 14-1/8 | 14-3/8 | 14-3/4 | 15-1/8 | 15-1/2 | 16 | 16-1/2 | 17 | ± 3/8 |
| 1/2 sweep 3/ | 19 | 19-1/2 | 20 | 20-3/4 | 21-1/2 | 22-1/4 | 23-1/4 | 24-1/4 | 25-1/4 | ± 1/2 |
| Sleeve length 4/: | | | | | | | | | | |
| Short | 21-1/4 | 21-1/2 | 21-3/4 | 22 | 22-1/4 | 22-1/2 | 22-3/4 | 23 | 23-1/4 | ± 1/4 |
| Regular | 22-1/2 | 22-3/4 | 23 | 23-1/4 | 23-1/2 | 23-3/4 | 24 | 24-1/4 | 24-1/2 | ± 1/4 |
| Long | 23-7/8 | 24-1/8 | 24-3/8 | 24-5/8 | 24-7/8 | 25-1/8 | 25-3/8 | 25-5/8 | 25-7/8 | ± 1/4 |
| Back length 5/: | | | | | | | | | | |
| Short | 21-1/2 | 21-3/4 | 22 | 22-1/4 | 22-1/2 | 22-3/4 | 23 | 23-1/4 | 23-1/2 | ± 1/4 |
| Regular | 22-3/4 | 23 | 23-1/4 | 23-1/2 | 23-3/4 | 24 | 24-1/4 | 24-1/2 | 24-3/4 | ± 1/4 |
| Long | 24-3/8 | 24-5/8 | 24-7/8 | 25-1/8 | 25-3/8 | 25-5/8 | 25-7/8 | 26-1/8 | 26-3/8 | ± 1/4 |

The jacket shall be buttoned, placed flat upon a table, and measured from folded edge to folded edge unless otherwise indicated.

1/ Measure across front 1 inch below armhole seam.

2/ Four and one-half inches below neck edge of undercollar, measure from sleeve setting seam to sleeve setting seam.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

3/ Measure along bottom edge from folded edge to folded edge of jacket.

4/ Measure down center of sleeve from sleeve setting seam at shoulder seam to bottom of sleeve.

5/ Measure taken at center back from collar setting seam to bottom of jacket.

3.11 Workmanship. The finished jacket shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in MIL-STD-1608. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, drawings or standards, testing shall be performed on components listed in table IV for characteristics noted. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

| Lot size | Sample size |
|---|---|
| 800 or less | 2 |
| 801 to 22,000 inclusive | 3 |
| 22,001 and over | 5 |

The basis for lot size and sample units for testing shall be as follows:

| Component | Lot expressed as | Sample unit for testing |
|---|---|---|
| Fusible cotton interlining | yards | 1 yard full width |
| Polyester lining | yards | 1 yard full width |

TABLE IV. *Component tests*

| Component | Characteristic | Requirement paragraph | Test method |
|---|---|---|---|
| Fusible interlining | Material identification | 3.2.2 | 1200 1/ |
| | Weight | 3.2.2 | 5041 |
| | Weave | 3.2.2 | Visual |
| | Yarns per inch | 3.2.2 | 5050 |
| | Bond strength, after 5 launderings | 3.2.2 | 5552 and 5951 |
| Polyester lining | Weight | 3.2.3 | 5041 |
| | Weave | 3.2.3 | Visual |
| | Yarns per inch | 3.2.3 | 5050 |
| | Breaking strength | 3.2.3 | 5100 |
| | Tearing strength | 3.2.3 | 5132 |
| | Shrinkage | 3.2.3 | 5552 |
| | Colorfastness to: | | |
| | Laundering (after 3 cycles) | 3.2.3 | 5614 |
| | Crocking | 3.2.3 | 5651 |
| | Perspiration | 3.2.3 | 5680 |

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the stated requirement.

4.4.2 End item examination. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1608.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each jacket shall be fully buttoned and laid flat with the front down. A paperboard insert conforming to figure 2 shall be positioned inside the jacket, fitting into the collar and shoulder areas. The sleeves shall be folded across the back and the bottom shall be folded up so that the completely folded jacket measures approximately 19 by 16-1/2 inches. Each folded jacket shall be inserted in a close-fitting clear polyethylene film bag having a thickness of 0.0015 (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial. Jackets shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Thirty-six jackets of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, thirty-six in depth within a shipping container. Inside dimensions of each container shall approximate 20-1/2 inches in length, 18 inches in width and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.2. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B packing. Thirty-six jackets of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, tyle CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, thirty-six in depth within a shipping container. Inside dimenions of each container shall approximate 20-1/2 inches in length, 18 inches in width and 18 inches in depth. Approximate dimenisons are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.2. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification, except that the inspection shall be in accordance with 4.4.2.

5.2.3 Commercial packing. Jackets, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. The jacket is intended for wear as part of the summer uniform used by the female personnel of the Department of the Army.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article sample is required (see 3.1.2, 4.3 and 6.5).
(c) Size required (see 1.2).
(d) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 Fabric characteristics. Manufacturers are alerted to the fact that knit fabrics may exhibit some differential in stability from piece to piece and lot to lot. Manufacturer's are cautioned to be cognizant of stability characteristics of the pieces before initiation of cutting.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

6.5 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Armed Services Procurement Regulations. The first article should be a pre-production sample, initial production item, or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.6 Supersession data. This specification includes the requirements of Limited Production Purchase Description 6-76.

Custodian:

Army - GL

Preparing activity:

Army - GL

Project No. 8410-A476



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.


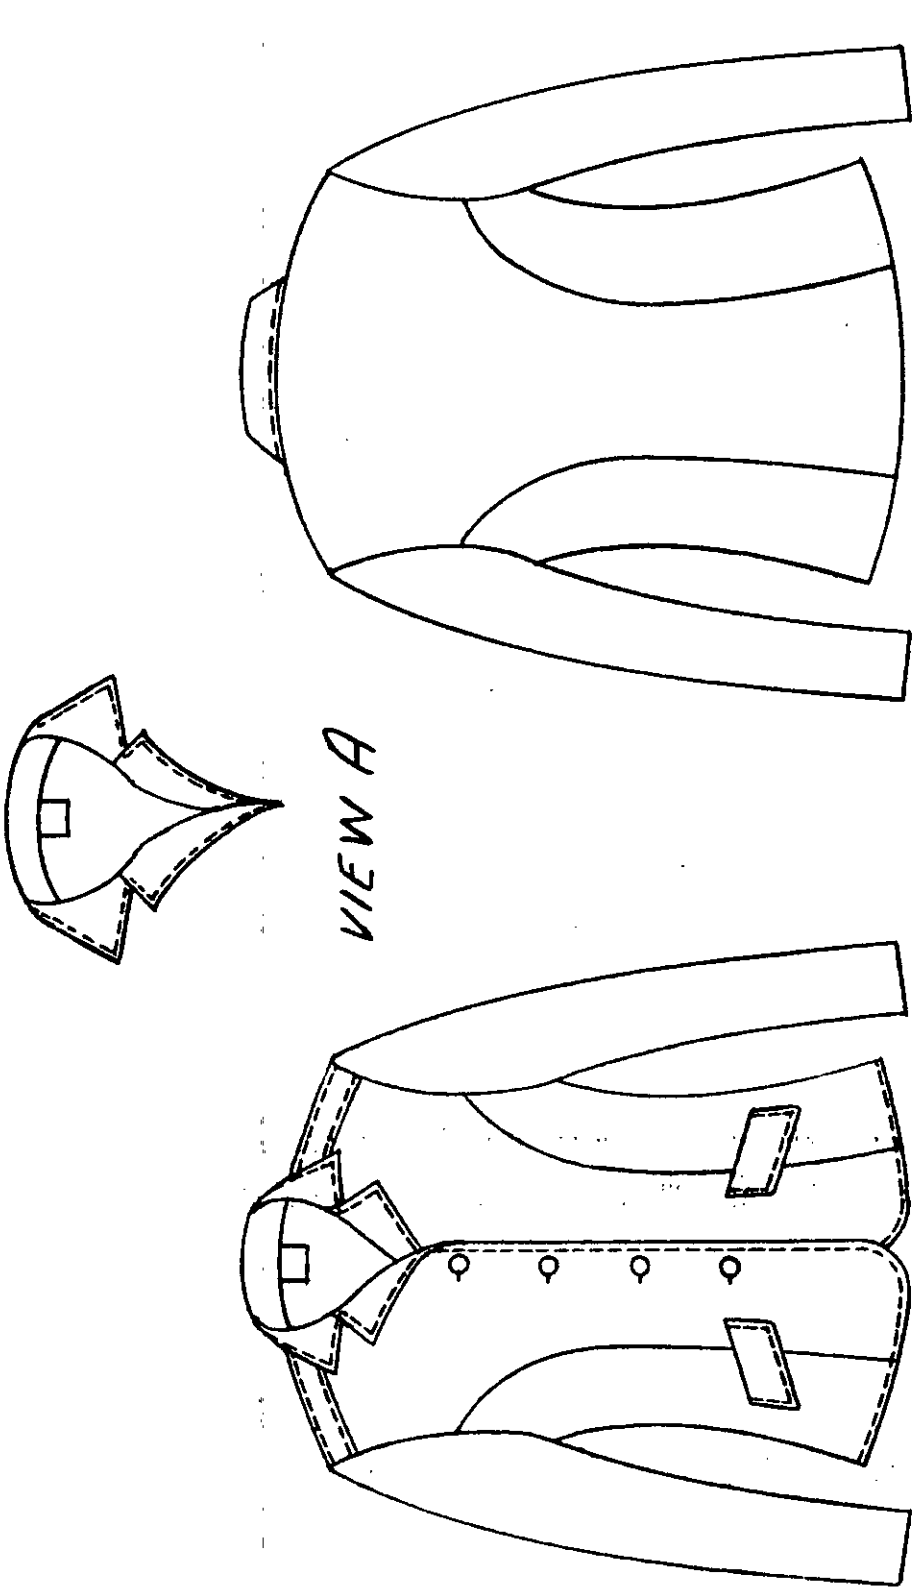



FIG. 1 JACKET, WOMAN'S, SUMMER, WARP KNIT

21-1283 A



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

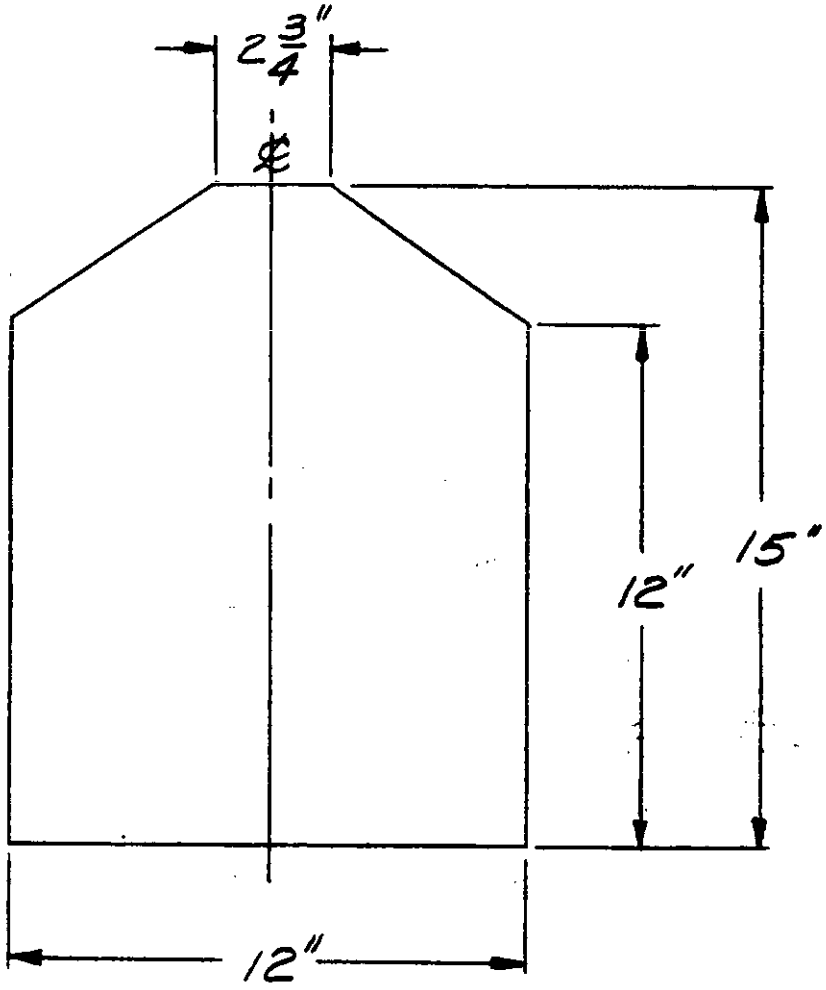


ALL MEASUREMENTS ARE APPROXIMATE
NON-BENDING PAPERBOARD .032" THICK

FIG 2 INSERT, PAPERBOARD

2-1-1287 A



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

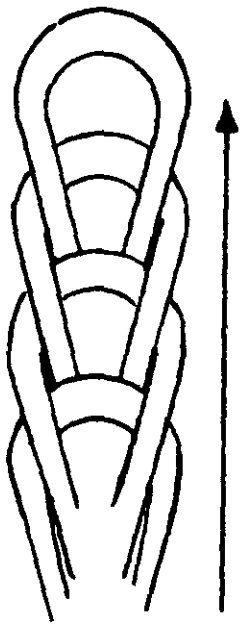


FIG. 3 SCHEMATIC DIAGRAM DEMONSTRATING DIRECTION OF LOOPS (BACKSIDE OF FABRIC SHOWN)

2-1-1870 B



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

FOLD

**DEPARTMENT OF THE ARMY**
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314




Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

**INSTRUCTIONS:** This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

**NOTE:** This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-J-44020(GL) - Jacket, Woman's, Summer, Warpknit (Long Sleeve)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:23Z
Check the source to verify that this is the current version before use.