MILITARY SPECIFICATION

KIT, DRIVE-OFF AID, VEHICLE

This specification is approved for use by the Natick Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of vehicle drive-off aid.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

DRAWING

US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

11-1-486 - Kit, Drive-Off Aid, Vehicle

(Copies of specifications, standards, drawings, and publications required by contractors should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. When specified, the contractor shall furnish a sample for first article inspection and approval (see 4.3, 6.2 and 6.3).

3.2 Material and component. Materials and components shall conform to the requirements specified herein and on Drawing 11-1-486 and the subsidiary documents applicable thereto (see 6.4).

3.2.1 Setting of grommet. The grommet assembly shall be clinched securely without cutting the material.

3.3 Identification marking. Identification marking shall be as specified on the applicable drawing.

3.4 Workmanship. The workmanship shall conform to the quality established by this document.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required, it shall be examined for the defects in table I and for compliance with dimensions specified. The presence of any of the defects listed in table I or any dimensions not within specified requirements shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item examination. The lot shall consist of all kits offered for inspection at one time. The sample unit shall be one complete kit.

4.4.2.1 Visual examination. The completely fabricated kit shall be examined for the defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 4.0 for major defects and 10.0 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Material	Not specified type, class or size	X	
	Color not as specified		X
	Cut, hole, tear or abrasion	X	
Stitches and stitching	Not type of stitch specified	X	
	Stitch pattern not as specified		X
	One stitch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One or more stitches in excess of the maximum specified		X
	NOTE: Variation in number of stitches per inch, caused by operator speeding up the machine or pulling the material in order to sew over heavier places, heavy seams or in turning corners, shall be classified as follows: (a) Within the major defect classification - Minor defect (b) Within the minor defect classification - No defect		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Stitches and stitching (cont'd)	Thread breaks, bobbin runouts, or two or more consecutive skipped stitches, not overstitched a minimum of 1 inch		X
	Ends of stitching not backstitched a minimum of 1/2 inch		X
	Loose tension, resulting in loosely exposed top or bobbin thread, or tight tension resulting in tightness or puckering of material at stitch line		X
	Thread ends not trimmed		X
	Any row of stitching missing	X	
	Needle chews	X	
	Runoffs not restitched		X
	Any open seams	X	
	(NOTE: A seam will be classified as open when one or more stitches joining a seam are broken or two or more consecutive skipped stitches occur. Repairs of open seams shall not be scored as defects.)		
Hook	Not finished as specified		X
Grommet and washer assembly	Omitted, damaged or malformed	X	
	Material cut by grommet	X	
	Not assembled as specified	X	
Construction and workmanship	Any component missing, misaligned, or not joined as specified	X	
	Grease, oil, dirt or other foreign matter in or on surface of material		X
Marking	Not specified size or color		X
	Missing, incorrect or illegible		X

4.4.2.2 Dimensional examination. Examination shall be made for compliance with the dimensions specified on the drawings. Any deviation therefrom shall constitute a defect. The inspection level shall be S-1 with an AQL of 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

4.4.3 Packaging inspection. An examination shall be made to determine whether the preservation, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully packaged, except that it need not be closed. Closure defects shall be examined on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 6.5 defects per hundred units.

TABLE II. Examination of packaging

Examine	Defect
Materials	Component missing, damaged, defective, or not as specified
Workmanship	Improper preservation of interior containers; loose strapping or tape banding; bulged or distorted containers
Contents (unit pack and exterior container)	Number per unit pack or exterior container not as specified
Marking (unit pack and exterior container)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each drive-off aid, with the hooks in the closed and secured hook pockets, shall be compactly arranged and then unit packed in a snug-fitting fiberboard box conforming to style RSC, grade W6c of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Commercial. Each drive-off aid shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Eight drive-off aids, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V2s of PPP-B-636; or overseas type, style A or I, grade A or B, type 2 load of PPP-B-601. Each fiberboard container shall be closed in accordance with method III and reinforced as specified in the appendix of PPP-B-636. Each wood container shall be closed and reinforced with the appendix of PPP-B-601.

5.2.2 Level B packing. Eight drive-off aids, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Drive-off aids, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs, and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The vehicle drive-off aid kit is used in airborne operations to remove wheeled vehicles from platforms when derigging on the drop zone.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1, 4.3 and 6.3).
(c) Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104-55. The first article should be a preproduction sample. The first article should consist of one drive-off aid kit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification.

6.5 Supersession data. This specification includes the requirements of Limited Production Purchase Description LP/P.DES 8-73 dated 4 April 1973.

Custodian:

Army - GL

Preparing activity:


Army - GL

Project No. 1670-A624

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

REVISIONS

SYM	D. W.O. NO.	DR	CK	DESCRIPTION	DATE	APPR
A	D-2576	FF		CHANGED TITLE	6 APR 73	

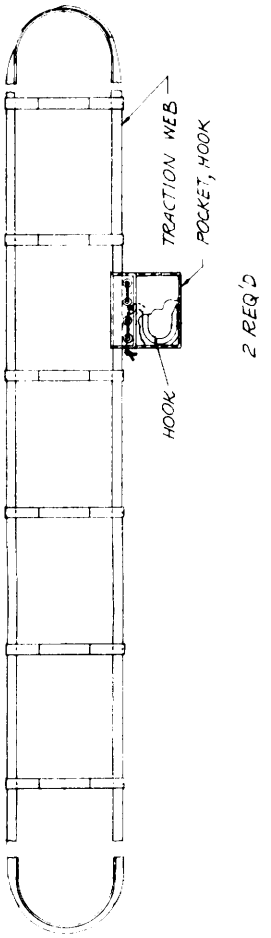

PART NO.	ITEM	NO. REQ'D
11-1-486	UNIVERSAL DRIVE-OFF AID, AIRDROP VEHICLE ASSEMBLY	2
11-1-460	TRACTION WEB	2
11-1-1248	HOOK	2
11-1-461	POCKET, HOOK	2

ITEM LIST

ITEM NO.	DESCRIPTION	NO. REQD	MATERIAL	MATL SPEC	PART NO.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/64 DECIMALS ANGLES .XXX ± .005 MACH. AND METAL GAGES EXCLUDED

DRAWN: P. Stopadonna
CHECKED: R. John Daly
PROJ ENGR: P. Stopadonna
QMTSM: H. E. Clausen
APPROVAL DESIGN ACTIVITY: Robert J. Bruce
APPROVAL OTHER

NEXT ASSY | USED ON

DO NOT APPLY PART NO AS SPECIFIED

SUPERSEDES DRAWING

DRAFTING WORK ORDER NO.

DATE 3 NOV 1972

U. S. ARMY NATICK LABORATORIES
NATICK, MASS.

KIT, DRIVE-OFF AID, VEHICLE

CODE 51337 | SIZE C | DWG NO. 11-1-486

SCALE 1" = 1'0 | UNIT WT 7.23 LBS | SPEC NO.

SHEET 1 OF 1

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/3014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-K-44028(GL) KIT, DRIVE-OFF AID, VEHICLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:26Z
Check the source to verify that this is the current version before use.