MIL-L-44042
17 March 1981
SUPERSEDING
(see 6.6)

MILITARY SPECIFICATION

LINER, FOOD INSPECTOR'S SMOCK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a liner, made from quilted polyester batting material.

1.2 Classification. The liner shall be in one type, in the following sizes (see 6.2):

Schedule of sizes

Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-F-106	-	Fasteners, Slide, Interlocking
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
MIL-T-2283	-	Tape, Textile, Nylon, Woven, White or Dyed
MIL-C-5040	-	Cord, Nylon
MIL-F-10884	-	Fasteners, Snap
MIL-E-20652/1	-	Eyelets, Metallic, Rolled Flange Type; and Eyelet Washer
MIL-B-41826	-	Batting, Synthetic Fibers: Polyester (Quilted and Unquilted)
MIL-T-43548	-	Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Guuide samples are furnished solely for guidance and information to the contractor (see 6.3). Variations from the specfication may appear in the sample, in which case the specification shall govern.

3.1.2 First articlé. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.2 Material (see 6.5).

3.2.1 Basic material. The basic material shall be made of polyester batting, quilted, conforming to type IV, class 3, style a of MIL-B-41826.

3.2.2 Facings and welts. The material for facings, pocket welts, eyelet reinforcements and when used for waist drawcord tunnel shall be cloth, oxford, nylon, 3 ounce, natural color conforming to type I, class 2 of MIL-C-508.

3.2.3 Collarette and cuff. The yarn for knitting the cuff and collarette fabric shall be made from natural color first quality multifilament nylon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

3.2.3.1 Cuff. The cuffs shall be made on a circular knitting machine, seamless, with a 1 by 1 rib stitch, and have not less than 14 wales and 26 courses per inch. The cuffs shall have a tuck or expanding stitch not less than 1-1/2 nor more than 2 inches in length when cut and doubled. The finished cuffs shall conform to the following measurements:

Cuff measurements

Length (inches)	Folded edge (inches)	Open edge (inches)	Tolerance (inches)	Weight per dozen pair
7	2-1/2	4	± 3/8	4 ounce (min)

3.2.3.2 Collarette. The finished fabric shall be a true 1 by 1 ribbed knit, and have a minimum of 12 wales and 26 courses per inch and shall have a finished weight of not less than 8 ounces per square yard of single fabric.

3.2.4 Tape. The tape for waist drawcord tunnel and hanger loop shall be tape, nylon, woven, natural color, 3/4 inch wide conforming to MIL-T-2283.

3.2.5 Cord, nylon. The drawcord for hood and waist shall be cord, nylon, natural color conforming to type I of MIL-C-5040. After cord is cut to required length, the ends shall be fused to prevent raveling.

3.2.6 Thread. The thread for seaming and stitching the liner shall be cotton-covered, polyester thread, white, ticket numbers 50, 2 or 3 ply and 70, 2 or 3 ply conforming to MIL-T-43548.

3.2.7 Labels. Each liner shall have an identification label, and a size label, and an instruction label conforming to DDD-L-20. The labels shall show fastness to laundering.

3.2.7.1 Identification label. The identification label shall conform to type VI, class 1.

3.2.7.2 Size label. The size label shall conform to type VI, class 2.

3.2.7.3 Instruction label. The instruction label shall conform to type VI, class 3 and shall contain the following information:

LINER, FOOD INSPECTOR'S SMOCK

1. Dry liner and smock separately when damp or wet.
2. Avoid contact with heated stoves or other heat sources; fabric may fuse.
3. Wash by hand or machine in warm water with mild soap or detergent, rinse thoroughly and drip or machine dry. DO NOT DRY CLEAN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

3.2.7.4 Combination label. The identification, size, and instruction label may be combined to conform to the type I, class 14.

3.2.8 Slide fastener. The slide for hood shall conform to requirements for type I, style 4, size LM with short tab pull of V-F-106. The fastener chain shall be fabricated of aluminum, brass or zinc.

3.2.8.1 Length of slide fasteners. The respective lengths of the slide fastener shall be 11-1/2 inches for small size, 12 inches for medium size, 12-1/2 inches for large size, and 13 inches for X-Large size.

3.2.8.2 Slide fastener tape. The tape shall be white cotton.

3.2.9 Snap fasteners. The snap fasteners shall be fasteners, snap, brass, style 2A, male and female complete, consisting of stud and eyelet size 1 or 2 with button size 1 or 2 and socket conforming to MIL-F-10884.

3.2.10 Eyelets. The eyelets for drawcord outlets shall be brass, conforming to BWE 107 of MIL-E-20652/1.

3.3 Design. The design is as shown on figure 1.

3.4 Patterns. Standard patterns which provide an allowance of 1/2 inch for joining seams and 1/4 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns, which shall be identical to the standard patterns. As an option, the hood may be cut in two parts, adding appropriate seam allowance.

3.4.1 List of pattern parts. The components of the liner shall be cut from materials as specified according to the pattern parts indicated.

List of pattern parts.

Material	Nomenclature	Cut parts
Cloth, oxford, nylon polyester fiber filled (quilted)	Back	1
	Front	2
	Sleeve	2
	Hood	1 or 2
Cloth, oxford, nylon	Hood facing	2
	Welt (pocket opening)	2
Cloth, knitted, nylon	Collarette	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

3.5 Construction.

3.5.1 Stitches, seams and stitchings. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. Whenever two or more methods of seams or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the liner.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/4 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewed.

3.5.1.1.1 Repairs of type 301 stitching.

3.5.1.1.1.1 Quilted batting stitching. Broken stitches of the quilting pattern may be repaired by stitching back of each end of break not less than 1 inch.

3.5.1.1.1.2 Liner fabrication stitching.

a. When thread breaks or bobbin run-outs occur during stitching, except prestitching, the stitching shall be repaired by restarting the stitching a minimum of 1/4 inch back of the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/4 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/4 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 301, 401, 406, 502, 503, 504, 515, 516, 519 and 602 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1.2a. and 3.5.1.1.1.2b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.5.2 Bartack. Bartack shall be 1/2 $\pm$ 1/16 inch long, 1/8 $\pm$ 1/32 wide and shall contain 28 stitches. The bartack shall be free from thread breaks and loose or tight stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

3.6 Manufacturing operations requirements. The liner shall be made by and with the use of operations shown in table I. The contractor is not required to follow the exact sequence of operations shown. Additional basting or holding stitching may be used providing the threads are removed or are not visible on the finished line.

3.6.1 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

3.6.2 Marking. The cut parts of the liner shall be marked to insure uniform size throughout the garment. Any method of marking may be used except:

(1) Corrosive-metal fastening devices.

(2) Sew-on type tickets.

(3) Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the liner parts in strict accordance with patterns furnished, which show size, directional lines, and notches for the proper assembly of parts. b. Cut the fronts and back in the warp direction. NOTE: Care shall be exercised when cutting the basic material and handling the cut parts as a precaution to preventing the ends of quilting stitching from running back. c. Cut drawcords in the following lengths for all sizes: two each, 25 ± 1/2 inches long for hood; one each, 65 ± 1/2 inches long for waist. d. When cloth, nylon, oxford is used for waist drawcord tunnel, cut the cloth, 1 - 1/4 + 1/8 inch wide and sufficient length in the warp direction to correspond to the marks on the patterns for the various sizes. The cloth may be placed on rolls for machine attachment. e. Cut reinforcement pieces from oxford cloth approximately 1-1/2 x 3/4 inches for eyelets.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I
MANUFACTURING OPERATIONS REQUIREMENTS

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of damaged parts.						
	During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2.1 shall be removed from production and replaced with non-defective and properly matched components.						
	NOTE: Broken stitches of the quilting pattern may be repaired by stitching back of each end of break, not less than one inch.						
	a. Replace any part damaged during the manufacturing process by needle chews, cuts, tears, holes, mends, burns, and exposed drill holes.						
3.	Marking (see 3.6.2).						
	Mark or ticket all parts to insure uniform size throughout the garment.						
4.	Overedge stitch liner parts.						
	a. Overedge stitch both sides of hood opening and neckline.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
	b. Overedge front parts along front edge.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
	c. Fold collarette in half lengthwise and overedge stitch raw edges together.	502 or 503	SSa-1 SSa-1	6-10 6-10	70 70	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach labels.						
	Sew labels on all four sides to inside center (1/2 inch off center tolerance) of back as follows: (1) Size label. Stitch 1-1/2 inches below collarette. (2) Identification label. May abut or be caught in the bottom line of stitching of the size label. (3) Instruction label. May abut or be caught in the bottom line of stitching of the identification label. (4) Combination label. When used, position as cited in (1) above.	301		10-14	50	50	
6.	Make hanger.						
	a. Cut tape for hanger loop, 4-1/4 ± 1/4 inches in length.						
	b. Fold tape in half lengthwise and double stitch 3/16 to 1/4 inch gage.	301	SSa-1	10-14	50	50	
			and OSf-1	10-14	50	50	
	- or -						
	c. Fold tape lengthwise to center, with edges abutting, and double stitch 3/16 to 1/4 inch gage, using a cover stitch on the underside.	406	EFh-1	10-14	50	50	
7.	Make welts for side opening.						
	a. Fold welt in half lengthwise and seam ends.	301 or 401	SSe-2(a)	10-14	50	50	
	b. Turn welt and force out corners.		SSe-2(a)	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hood.						
	a. Attach eyelet and reinforcement piece for draw-cord outlet at right side of hood 1 ± 1/8 inch from side edge and 1-1/2 ± 1/8 inch from bottom edge.						
	b. Attach eyelet and reinforcement piece for draw-cord outlet in center, ± 1/8 inch, of hood facing for left side 1-1/2 ± 1/8 inch from bottom edge.						
	c. Join facings to right and left side of hood respectively.	301 or	SSe-2(a)	10-14	50	50	
		401	SSe-2(a)	10-14	50	70	
	d. If hood is cut in two parts, join sides of hood. Overedge stitch seam allowance of hood together. Seam allowance shall finish outside.	503 or 504 and 301	LSbm-3(a)	10-14	50	50	
			LSbm-3(a)	6-10	70	70	
		301	LSbm-3(b)	6-10	70	70	70
	- or -						
	As an alternate, hood may be joined by stitching and overedging in one operation.	515 or 516 or 519 and 301	LSbm-3(a)	10-14	50	70	
	Seam allowance is turned to one side and top stitched 3/16 to 1/4 inch from folded edge.		LSbm-3(b)	6-10	70	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hood. (cont'd)						
	e. Position slide fastener under top edge of hood, with the scoops of slide fastener chain 1/8 to 3/16 inch from edges and with the bottom stop of slide fastener at the point of hood opening. Stitch slide fastener to each side of hood opening 1/8 to 3/16 inch from edges of opening through slide fastener tapes.	301	SSa-1	10-14	50	50	
	f. Thread hood drawcord through eyelet at each side of hood respectively.						
	g. Bartack (see 3.5.2) end of hood drawcord 1/4 to 5/16 inch from top edge of hood catching slide fastener tape in the tacking, at right and left side of hood respectively.	Bartack		28 per bartack	50	50	
	h. Turn facings to inside of hood and raise stitch 1/16 to 1/8 inch from turned edge. Turn in top edge of facing and turn in back raw edges of facings and stitch through hood 1/16 to 1/8 inch from turned edges, forming tunnels for hood drawcord at each side. Top edge of facings shall overlap slide fastener tapes. Slide fastener tape extension shall be turned under facing and caught in stitching. Drawcords shall not be caught in the stitching of the back edges of facing.	301 and 301	SSe-2(b) LSd-1	10-14 10-14	50 50	50 50	
	i. Abut slide fastener tapes together below bottom stop, turn in raw edgs of both tapes and stitch across width of both tapes through hood.	301	Lsd-1	10-14	50	50	

NATICK Form 903
1 Dec 76

EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hood. (cont'd)						
	j. Attach two cap portions of snap fastener to top edge of hood, one at each side, 1 ± 1/8 inch from side edge, and 1 ± 1/8 inch from top edge of hood (measured from overedge end of hood opening). The cap portion shall finish on inside of hood (when closed). The drawcords shall not be caught by the snap fasteners.						
9.	Make liner.						
	a. Position welts on outside front parts as indicated by marks on pattern and seam to fronts. Overedge stitch seam allowance of welt and fronts together; overedging to extend not less than 3/4 inch beyond each end of welt.	301 and 503 or 504	SSa-1 SSa-1 SSa-1	10-14 6-10 6-10	50 70 70	50 70 70	 70
	b. Overedge back parts of liner at sides between marks for side opening; overedging to extend not less than 3/4 inch beyond marks.	502 or 503	Efd-1 EFd-1	6-10 6-10	70 70	70 70	
	c. Join fronts to back at shoulders. Overedge stitch seam allowance of shoulder seams together.	301 and 503 or 504	SSa-1 SSa-1 SSa-1	10-14 6-10 6-10	50 70 70	50 70 70	 70
	d. Join sleeves to armhole and overedge stitch seam allowance of sleeve and body parts together.	301 and 503 or 504	SSa-1 SSa-1 SSa-1	10-14 6-10 6-10	50 70 70	50 70 70	 70

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make liner. (cont'd)						
	e. Join inseam of sleeves and side seams in one continuous operation except that portion for side openings, indicated by marks on pattern. Ends of stitching at side opening shall be backtacked (see 3.5.1.1.2).	301	SSa-1	10-14	50	50	
	- or -						
	As an alternate to operations c., d., and e. above, shoulder seams sleeve setting and side seams may be joined by stitching and overedging in one operation.	515 516 or 519	LSbm-3(a)	10-14	50 chain stitching 70 overedge stitching	70 70	
	f. Overedge stitch seam allowance of inseam joining seams and side seam joining seams together, except that portion for side openings indicated by marks on pattern.	503 or 504	SSa-1 SSa-1	6-10 6-10	70 70	70 70	70
	g. Turn seam allowances of joining seams to one side and top stitch 3/16 to 1/4 inch from folded edges.	301 or 401	LSbm-3(b)	10-14	50 50	50 70	
	h. Bartack (see 3.5.2) ends of stitching at side openings with a horizontal bartack the width of the stitching.	Bartack		28 per bartack	50	50	

NATICK Form 903
1 Dec 76

EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

MIL-L-44042

TABLE I
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Join hood and collarette to liner.						
	a. Position bottom edge of hood and bottom edge of collarette even with top edge of liner, fold front facings back on fronts as indicated by marks on pattern. Join all plies together.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50 50	50 70	
	b. Turn facings, force out points and turn hood into position.						
	c. Raise stitch hood joining seam through all plies 1/4 to 5/16 inch from turned edge and continue the stitching along front folded edges to bottom of liner, maintaining the gage of stitching. The ends of the hanger loop shall be caught between collarette and hood in the raised stitching. Ends of hanger loop shall be spread not less than 3-1/4 inches apart measured from outside edge to outside edge.	301 and 301	LSq-2(b) OSf-1	10-14 10-14	50 50	50 50	
	d. Overedge stitch bottom edge of liner, turning side seam allowance toward fronts.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
	e. Turn up bottom of liner to the inside 1/2 to 5/8 inch and stitch 1/4 to 5/16 inch from folded edge forming hem.	301	EFa-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make tunnel for waist drawcord.						
	a. Clinch an eyelet through each front and reinforcement piece at waist as indicated by marks on pattern.						
	b. Thread drawcord through eyelets and knot ends.						
	c. Position tape for waist drawcord on inside of liner, as indicated by marks on pattern, over drawcord and stitch tape to liner 1/16 to 1/8 inch from each edge, turning the ends of the tape to inside 1/2 to 3/4 inch and catch in the stitching. Drawcord shall not be caught in the stitching.	301	OSd-2	10-14	50	50	
	- or -						
	d. When cloth, nylon, oxford is used for waist drawcord tunnel (see operation 1d.), turn in each edge 3/16 to 1/4 inch and stitch to liner 1/16 to 1/8 inch from each turned edge, turning the ends of the tunnel strip to the inside 1/2 to 3/4 inch and catch in the stitching. If either edge is cut with selvage, the edge need not be turned in.	301	LSd-1 each edge	10-14	50	50	
	e. Ends of the tunnel strip may be pre-hemmed prior to joining to liner; turn in each end 1/2 to 3/4 inch and stitch across ends 1/4 to 3/8 inch from folded ends.	301	EFa-1 each end	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12	Make and attach cuff.						
	a. Fold cuffs in half and overedge stitch raw edges of cuff seam allowance together.	503 or	SSa-1	6-10	70	70	
		504	SSa-1	6-10	70	70	70
	b. Attach cuff to bottom of sleeve on the underside with a single row of stitching.	301	SSa-1	10-14	50	50	
	c. Overedge bottom of sleeve and cuff together and turn cuff down.	503 or	SSa-1	6-10	70	70	
		504	SSa-1	6-10	70	70	70
	- or -						
	d. Attach cuff to underside of sleeve by stitching and overedgeing in one operation.	401 and	SSa-2	10-14	50	70	
		602	SSa-2	10-14	70	70	70
13	Attach snap fasteners.						
	a. Clinch nine studs through right front and facing as indicated by marks on pattern.						
	b. Clinch one stud through left front and facing as indicated by mark on pattern to accommodate socket on hood.						
	c. Clinch seven sockets through left front and facing as indicated by marks on pattern, with the cap portion on outside of liner.						
14	Clean liner.						
	a. Trim and remove all loose threads. b. Remove all spots and stains. c. Remove all tickets or markings. d. Close snap fasteners and fold liner for packing.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The liner shall conform to the measurements shown in table II. Measurements shall be taken after the liner has been smoothed flat (applying slight tension) on a table along the dimension to be measured. During the measurement, no tension whatsoever shall be applied to the end item.

TABLE II. Finished measurements (inches)

	Small	Medium	Large	X-Large	Tolerance
1/2 breast measurement 1/	24	26	28	30	± 3/4
Back length 2/	46	48	50	52	± 3/4
Sleeve length 3/	17-1/2	17-1/2	17-1/2	17-1/2	± 1/2

1/ Measure at base of armhole, from folded edge to folded edge, with front closed.

2/ Measure along center back from hood joining seam to extreme bottom edge of liner.

3/ Measure from base of armhole along inseam to bottom of sleeve, excluding cuff.

3.8 Workmanship. The finished liner shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specfied herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.1.1 and 4.4.2.1.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component tests. In addition to the quality assurance provisions of the referenced specifications, components shall be tested as indicated in table III. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table III, shall be followed. When data in the "Number of determinations per sample unit" and the "Results reported as" columns are not specified in table III, they shall be as required by the referenced test method. The inspection level shall be S-1 and the acceptable quality level (AQL) for each characteristic shall be 4.0 defects per hundred units. The sample unit and lot size unit for testing the components shall be as follows:

Component	Sample unit	Lot size unit
Cuff	12 cuffs	Pair
Collarette	1 yard full width	Yard

TABLE III. Component tests

Component	Characteristic	Rqmt. para.	Test method	Number of det. per sample unit	Results reported as
Cuff	Material identification	3.2.3	1/	-	-
	Type of stitch (knit)	3.2.3.1	Comm practice	1	Pass or fail
	No. of wales	3.2.3.1	5070	-	-
	No. of courses	3.2.3.1	5070	-	-
	Wt. per doz. pr.	3.2.3.1	Comm practice	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

TABLE III. Component tests (cont'd)

Component	Characteristic	Rqmt. para.	Test method	Number of det. per sample unit	Results reported as
Collarette	Material identification	3.2.3	1/	-	-
	Type of stitch (knit)	3.2.3.2	Comm practice	1	Pass or fail
	No. of wales	3.2.3.2	5070	-	-
	No. of courses	3.2.3.2	5070	-	-
	Wt. per sq. yd.	3.2.3.2	5041	-	-

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.4.2 End item examination. The end item shall examined for the defects specified in 4.4.2.1 and 4.4.2.2. The sample unit shall be one liner. The lot size shall be expressed in units of one liner.

4.4.2.1 Visual examination. The inspection level shall be II and the AQL shall be 2.5 major, 15.0 major and minor A combined, and 40.0 total (major, minor A and minor B combined) defects per hundred units. All defects shall be classified as indicated below except for those with an asterisk (*) in the classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor (A) defect - When affecting appearance or serviceability, but not seriously.

Defect	Classification Major	Minor A	Minor B
Bartacks			
a. Missing, insecure, or misplaced to the extent that they do not serve the intended purpose:			
- two bartacks		X	
- one bartack			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Cleanness			
a. Thread ends not trimmed or not removed throughout major portion of liner			X
b. One or more tickets (if applicable) not removed			X
c. One or more removable spots or stains not removed		X	
d. One or more ink spots or stains of permanent nature:			
- on outside of liner			X
- one inside of liner		X	
Component and assembly			
Any component part or required operation omitted (unless otherwise classified herein)	X		
Cutting			
Any component part not cut in accordance with directional lines indicated on patterns or with specification requirements	X		
Drawcords			
a. One or more omitted	X		
b. Not specified type		X	
c. Ends not fused			X
d. Knot omitted			X
Eyelets			
a. Missing, defective, or not securely clinched:			
- one or two eyelets			X
- three or more eyelets		X	
- rough or sharp edges on one or more eyelets			X
b. Not specified type, or size		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Material defects and damages			
a. Applicable to cloth, nylon oxford polyester batting:			
1. Any weakening defect such as a smash, multiple float or loose slub (in any ply)	*		
2. Shade bars, slubs, dye or finishing streak	*		
3. Hole, cut, tear, mend, burn, or needle chews (in any ply)	*		
4. Broken or missing stitches in the quilting more than 1-1/2 inches in length			X
b. Applicable to knitted collarettes and cuffs:			
1. Hole, run or dropped stitches	*		
2. Elasticity lacking, i.e., tight			X
3. Slubby yarn			X
4. Unsightly mend			X
NOTE: Material defects and workmanship damages are to be classified as indicated when the defect definitely weakens the fabric or is conspicuous when the item is worn. Material defects or workmanship damages which are inconspicuous and do not weaken the fabric shall not be classified as defects.			
Seams and stitching			
a. Accuracy of seaming:			
1. Seams twisted, puckered or pleated			X
2. Part of garment caught in any unrelated operation or stitching	*		
3. Ends of all stitching (stitch type 301) when not caught in other seams or stitchings backtacked less than 1/4 inch		X	
4. Thread breaks (all stitch types) secured by stitching back of break less than 1/2 inch			X
5. Wrong shade thread, or thread of two or more shades used on the outside of same garment		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
b. Gauge of stitching:			
1. Irregular unevenly gaged or various stitchings not uniform, affecting appearance (to be scored when condition exists on major portion of seam)			X
2. Edge or raised stitchings sewn too close to edges resulting in damage to fabric		*	
3. Not within range of gauge specified or varies more than 1/16 inch when no range is specified			X
c. Open seams:			
1. Any joining seam open:			
- up to 1/4 inch inclusive			X
- more than 1/4 inch up to 1 inch inclusive		X	
- more than 1 inch	X		
NOTE: Open seam - a break in a line of stitching or continuous skipped or run-off stitches (except on edge, top or raise stitching) constitutes an open seam.			
d. Raw edges:			
1. Any raw edge:			
- up to 1/2 inch inclusive			X
- more than 1/2 inch		X	
2. Any raw edge caused by omission of overedge stitching for a distance of:			
- up to 3 inches inclusive			X
- more than 3 inches	X		
NOTE: Raw edges - a raw edge is classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not caught in the stitching score as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
e. Run-offs:			
1. On edge or raised stitching when not resulting in an open seam:			
- up to 1/2 inch inclusive			X
- more than 1/2 inch		X	
f. Stitches skipped or broken (applicable to (a) raised stitching when seam is seamed turned and stitched, (b) stitch type OSf-1:			
1. 1/4 to 1/2 inch inclusive			X
2. More than 1/2 inch		X	
g. Seam and stitch type:			
1. Wrong seam or stitch type		X	
h. Stitch tension:			
1. Loose tension, resulting in a loose seam	*		
2. Tight tension, i.e., stitches break when normal strain is applied to seam or stitching (score as defect of open seam)			
3. Loose tension on edge, raised or quilting stitching resulting in loosely exposed top or bobbin thread			X
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.			
i. Stitches per inch:			
1. All joining seams and stitching (labels excluded)			
(a) Less than the minimum specified:			
- one or two stitches			X
- three stitches		X	
- four or more stitches	X		
2. Labels:			
(a) Two or more less than minimum required			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Slide fasteners			
a. Any part of assembly omitted, bent, broken, cracked or otherwise defective affecting function	X		
b. Not specified type or length		X	
Snap fasteners			
a. Omitted, not securely clinched, mismated, broken, bent, cracked or otherwise defective, affecting function:	*		
- one snap fastener			X
- two snap fasteners		X	
- three or more snap fasteners	X		
b. Not specified type or size		X	
Hood			
a. Drawcords:			
1. Less than 24-1/2 or more than 25-1/2 inches		X	
2. Caught by snap fastener or stitching forming tunnels	X		
b. Snap fasteners:			
1. Cap portion less than 7/8 or more than 1-1/8 inch from side or top edge		X	
2. Cap portion placed on outside of hood (when closed)	X		
c. Slide fastener:			
1. Tapes stitched with metal chain more than 3/16 inch from edges of opening			X
2. Tapes stitched too close to metal chain obstructing freedom of slider	X		
3. Stitching of ends of tapes (below bottom stop), omitted or insecure			X
4. Fastener tape set on too loose or too tight, causing noticeable bulge on tape or hood	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Hood (cont'd)			
d. Construction and setting:			
1. Twisted	*		
2. Tight at joining to neck causing puckers or pleats on fronts or backs	*		
3. Excessive fullness or puckers on hood at joining to neck		X	
e. Eyelets:			
1. On right side:			
- less than 7/8 or more than 1-1/8 inch from side edge			X
- less than 1-3/8 or more 1-5/8 inch from bottom edge			X
2. On left side:			
- less than 1-3/8 or more than 1-5/8 inch from bottom edge			X
- not centered on facing by more than 1/8 inch			X
f. Facings:			
1. Excessive fullness on facings			X
2. Twisted, but not causing distortion on outside of hood or fronts			X
3. Tight, short or twisted causing distortion or fullness on outside of garment		X	
Collarette			
a. Twisted or distorted		X	
Hanger			
a. Ends not caught between collarette and hood raised stitching		X	
b. Less than 3-1/4 inches when measured from outside edge to outside edge			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Fronts			
a. Uneven in length (when closed) by:			
- more than 3/8 and up to 3/4 inch inclusive			X
- more than 3/4 inch		X	
b. Snap fasteners unequally spaced by more than 1/2 inch		X	
c. Studs or sockets out of vertical alignment by more than 1/4 inch			X
d. Fastener parts out of alignment causing noticeable bulge or twist on fronts when closed	*		
Wristlets			
a. Irregular in length by more than 1/4 inch		X	
b. Badly twisted		X	
c. Both wristlets not of uniform length by more than 1/4 inch		X	
Hem (bottom)			
a. Less than 1/2 or more than 5/8 inch wide			X
b. Irregular in width by 1/4 inch or more			X
c. Badly twisted, pleated or puckered		X	
d. Front facings positioned on top of hem			X
Side openings			
a. Side seaming extending beyond limits of pocket opening by:			
- up to 1/2 inch inclusive			X
- more than 1/2 inch up to 1 inch inclusive		X	
- more than 1 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Waist tunnel (construction and position)			
a. Opening less than 3/8 inch wide when cloth, oxford, nylon is used		X	
b. Irregular in width or stitched crookedly		X	
c. Outside of liner bulging, twisting or distorted due to improper tunnel stitching		X	
d. Ends of tunnel stitching not aligned when fronts are closed by:			
- 3/8 inch or more but not more than 3/4 inch			X
- more than 3/4 inch		X	
e. Eyelets out of alignment with center of tunnel opening by 1/2 inch or more		X	
Labels: identification, size, and instruction or combination			
a. Missing, incorrect, or illegible		X	
b. Label or labels not stitched on all four sides			X

4.4.2.2 Dimensional examination. The end item shall be examined for the size measurement defects listed below. The inspection level shall be S-3 and the AQL shall be 4.0 defects per hundred units.

Size measurement	Defect
1/2 chest	Measurement not as specified in table II.
Back length	Measurement not as specified in table II.
Sleeve length	Sleeves uneven in length by 1/2 inch or more. Measurement not as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

4.4.3 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defec shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, or inadequate stapling. Bulged or distorted containers.
Content	Number per shipping container is more or less than required.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each liner shall be fastened and laid flat, front up. The sleeves shall be folded one over the other across the chest and the hood folded dow full length. The sides shall be adjusted to a width of approximately 23 inches. The bottom edge shall be folded over so that the liner length is 29 inches. The liner shall then be folded in half across the length. The completely folded liner shall measure approximately 23 by 14-1/2 inches.

5.1.2 Commercial. The liners shall be preserved in accordance with MIL-STD-1188

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A packing. Six liners of one size only, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2 Level B packing. Six liners of one size only, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. Liners, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The liner is intended for wear with the Smock, Man's Food Inspector, Cotton, to provide added warmth to personnel of the Army Medical Services engaged in food inspection activities.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When a first article sample is required (see 3.1.2, 4.3 and 6.4).
(d) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(e) When weather-resistant grade shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to samples, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Defense Acquisition Regulation. The first article should be a preproduction sample, initial production item, or other specific item described in the definition of a first article in the DAR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification.

6.6 Supersession. This document supersedes LP/P DES 14-62A dated 14 September 1978 for Liner, Food, inspector's Smock.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Navy - CG
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0225

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

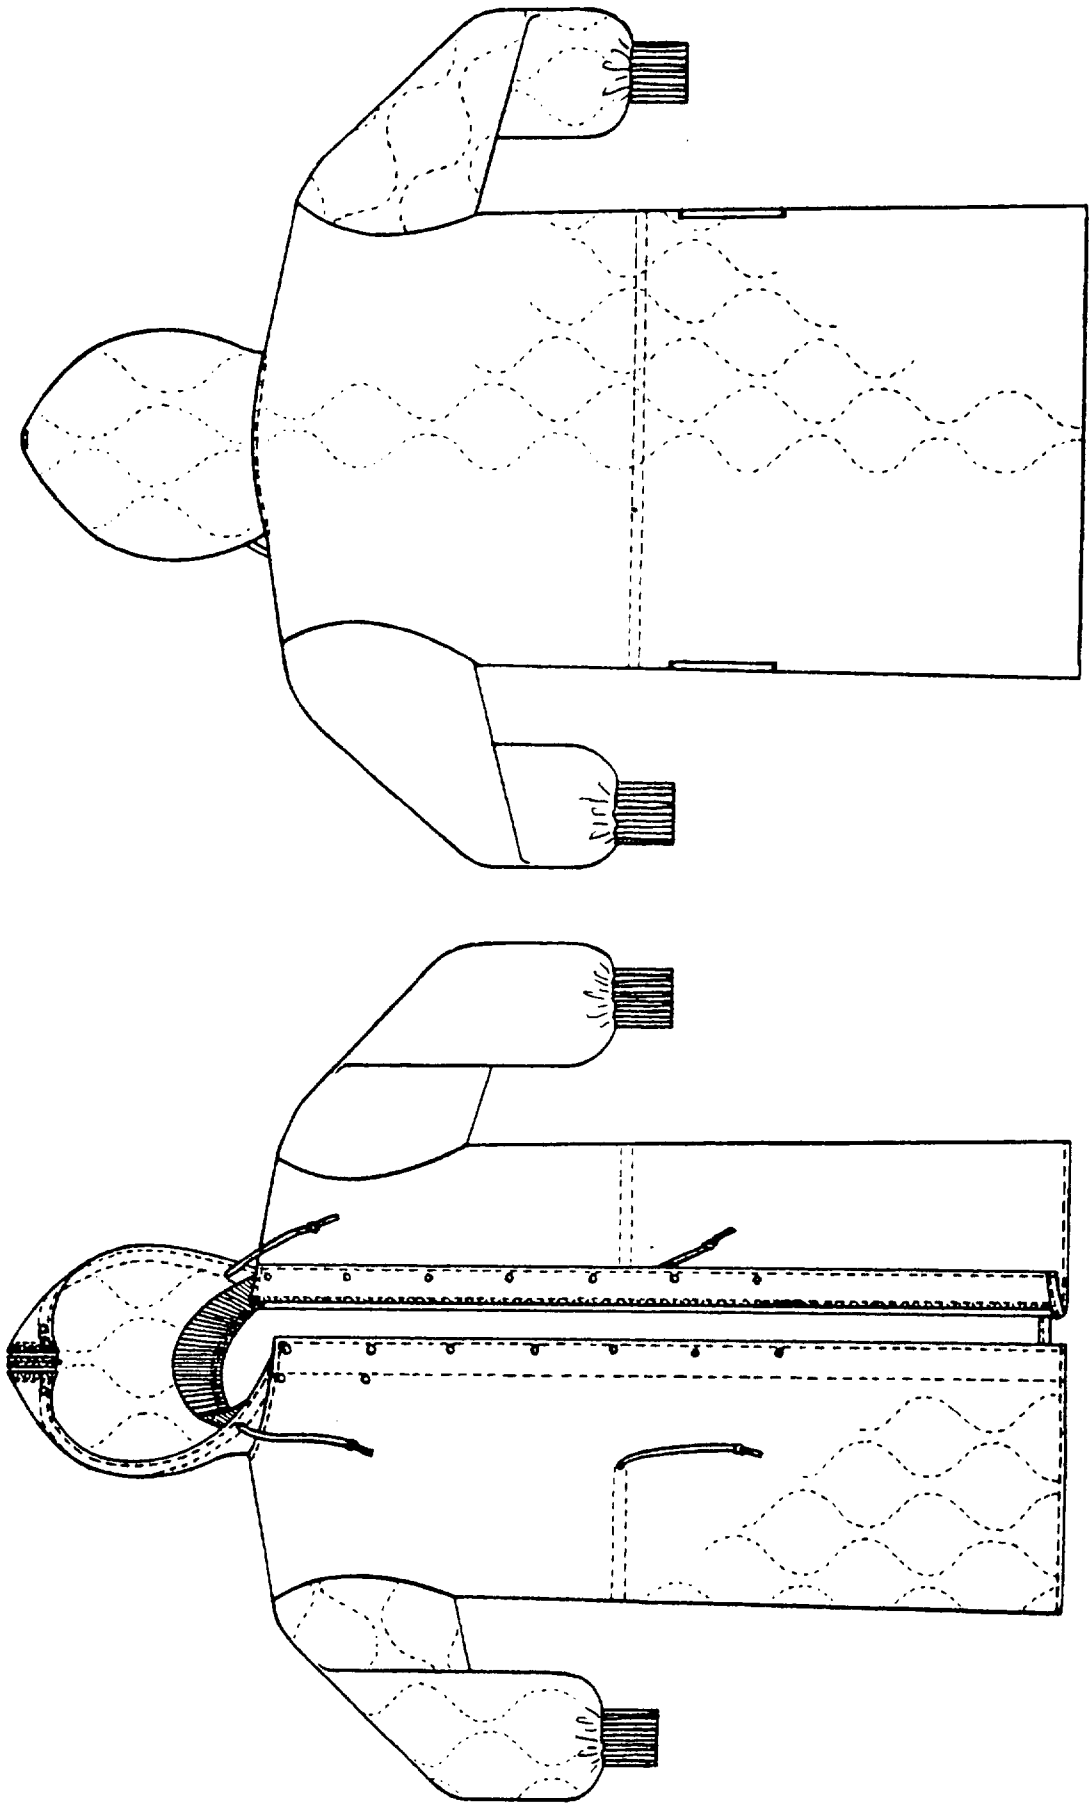


FIG. 1 - LINER, FOOD INSPECTOR'S SMOCK
21-550

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-L-44042 Liner, Food Inspector's Smock

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:32Z
Check the source to verify that this is the current version before use.