FED. SUP CLASS.
5306

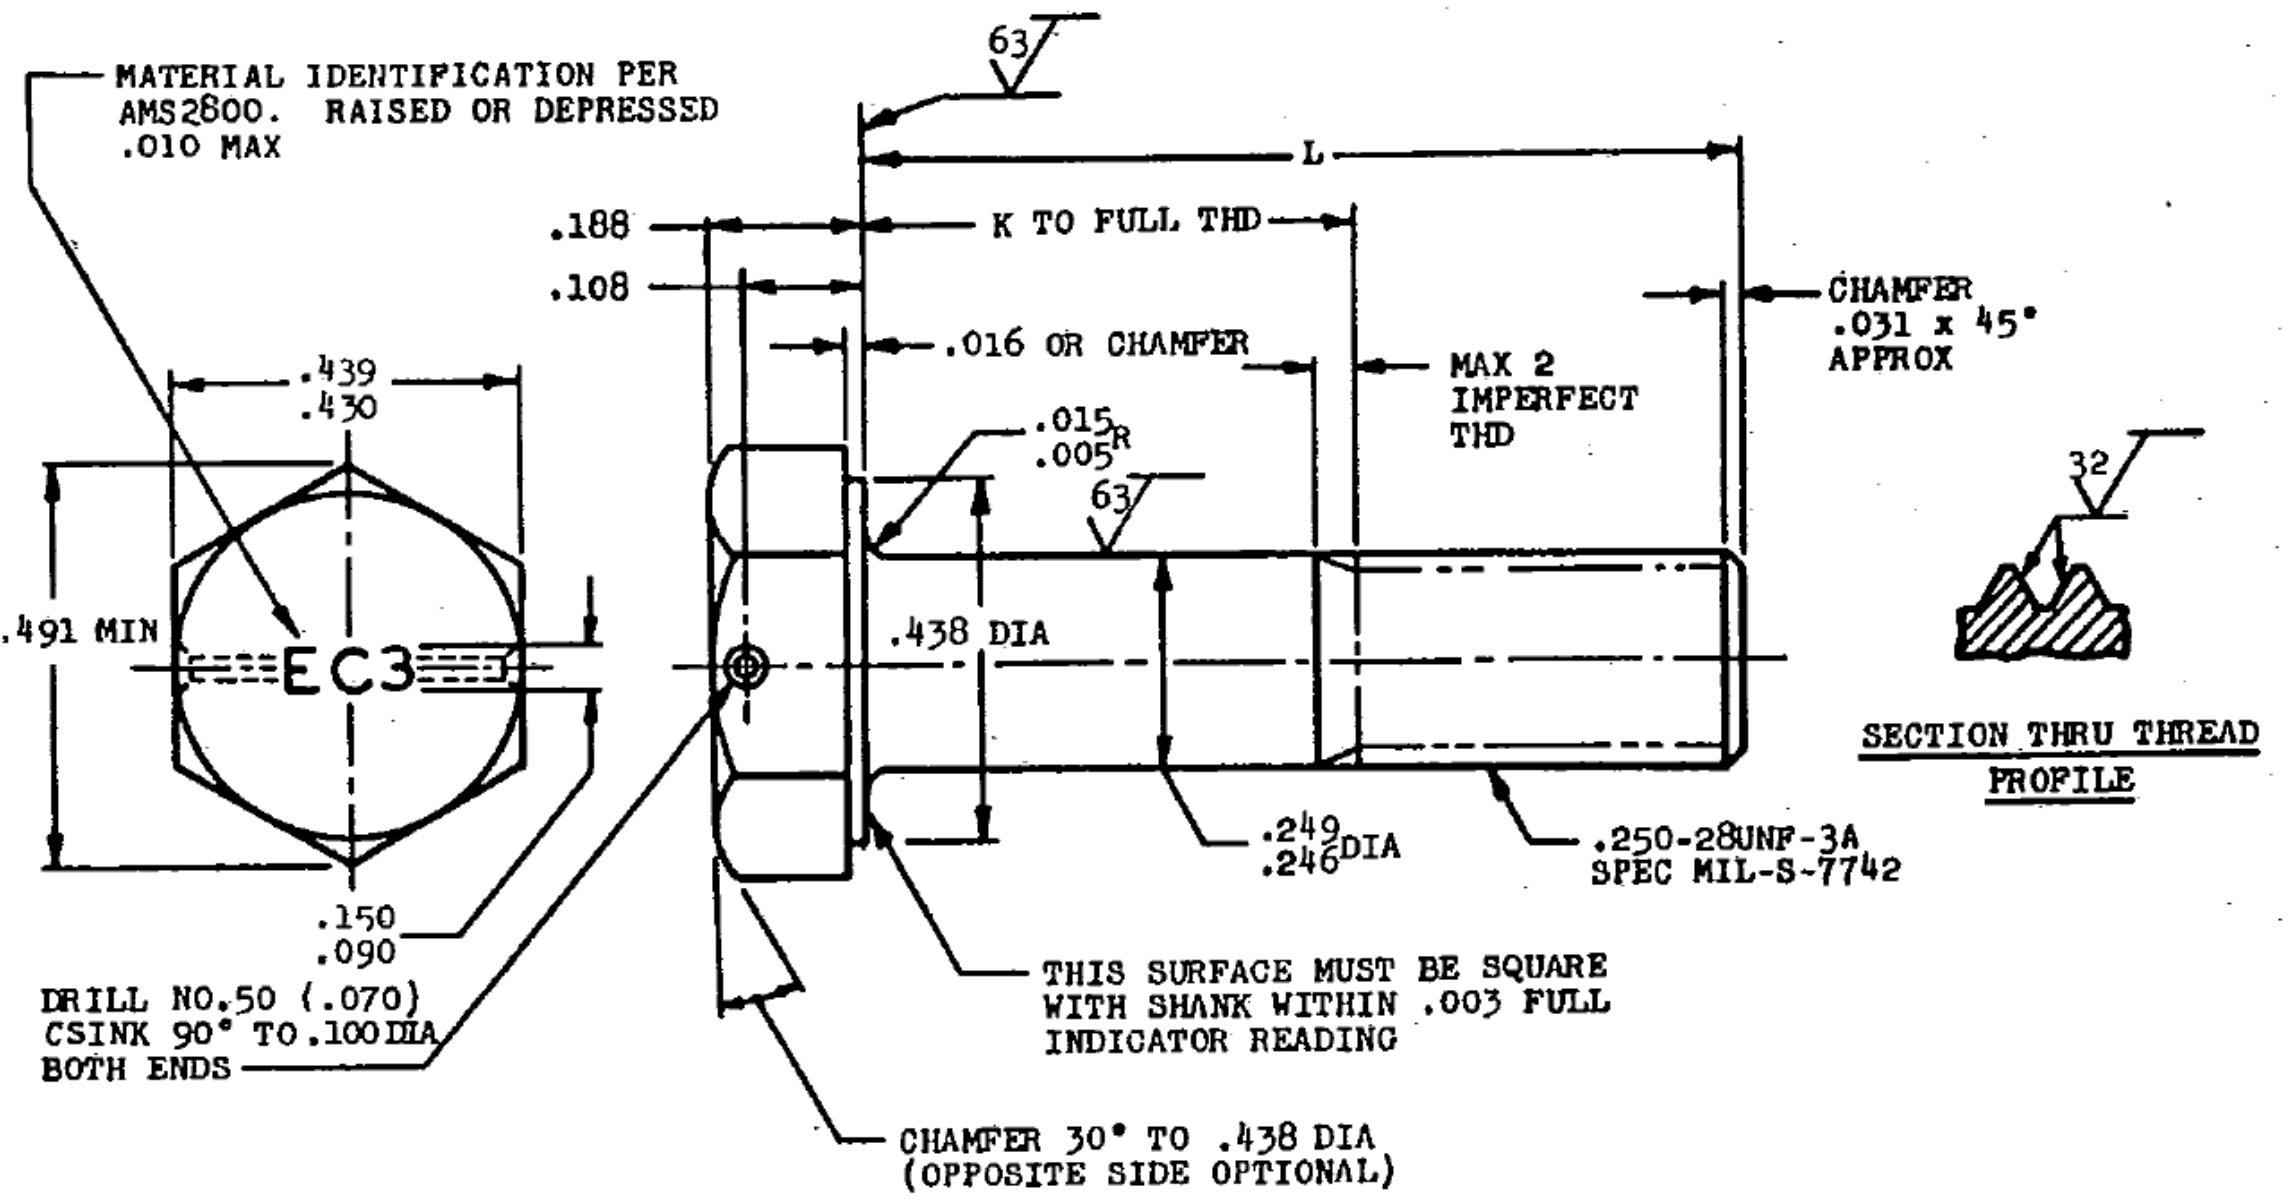

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.312	.562	AN106519	2.625	1.875	AN106533	4.375	3.625	AN106547
.500	(a)	AN106506	1.375	.625	AN106520	2.750	2.000	AN106534	4.500	3.750	AN106548
.562	(a)	AN106507	1.438	.688	AN106521	2.875	2.125	AN106535	4.625	3.875	AN106549
.625	(a)	AN106508	1.500	.750	AN106522	3.000	2.250	AN106536	4.750	4.000	AN106550
.688	(a)	AN106509	1.562	.812	AN106523	3.125	2.375	AN106537	4.875	4.125	AN106551
.750	(a)	AN106510	1.625	.875	AN106524	3.250	2.500	AN106538	5.000	4.250	AN106552
.812	(a)	AN106511	1.688	.938	AN106525	3.375	2.625	AN106539	5.125	4.375	AN106553
.875	.125	AN106512	1.750	1.000	AN106526	3.500	2.750	AN106540	5.250	4.500	AN106554
.938	.188	AN106513	1.875	1.125	AN106527	3.625	2.875	AN106541	5.375	4.625	AN106555
1.000	.250	AN106514	2.000	1.250	AN106528	3.750	3.000	AN106542	5.500	4.750	AN106556
1.062	.312	AN106515	2.125	1.375	AN106529	3.875	3.125	AN106543	5.625	4.875	AN106557
1.125	.375	AN106516	2.250	1.500	AN106530	4.000	3.250	AN106544	5.750	5.000	AN106558
1.188	.438	AN106517	2.375	1.625	AN106531	4.125	3.375	AN106545	5.875	5.125	AN106559
1.250	.500	AN106518	2.500	1.750	AN106532	4.250	3.500	AN106546	6.000	5.250	AN106560

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE:
(1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .013 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
③ INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED ① 31 Aug 54 ② 27 Dec 66 ③ 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .250-28

AN106501 THRU AN106600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.