INCH-POUND

AN121551thruAN121575 REV3

21 July 2020

SUPERSEDING

AN121551thruAN121575 REV2

30 June 1986

DETAILED SPECIFICATION SHEET

NUTS , PLAIN, CASTELLATED HEXAGON

.....

Inactive for new design in part

This specification is approve for all Departments and Agencies of the Department of Defense.

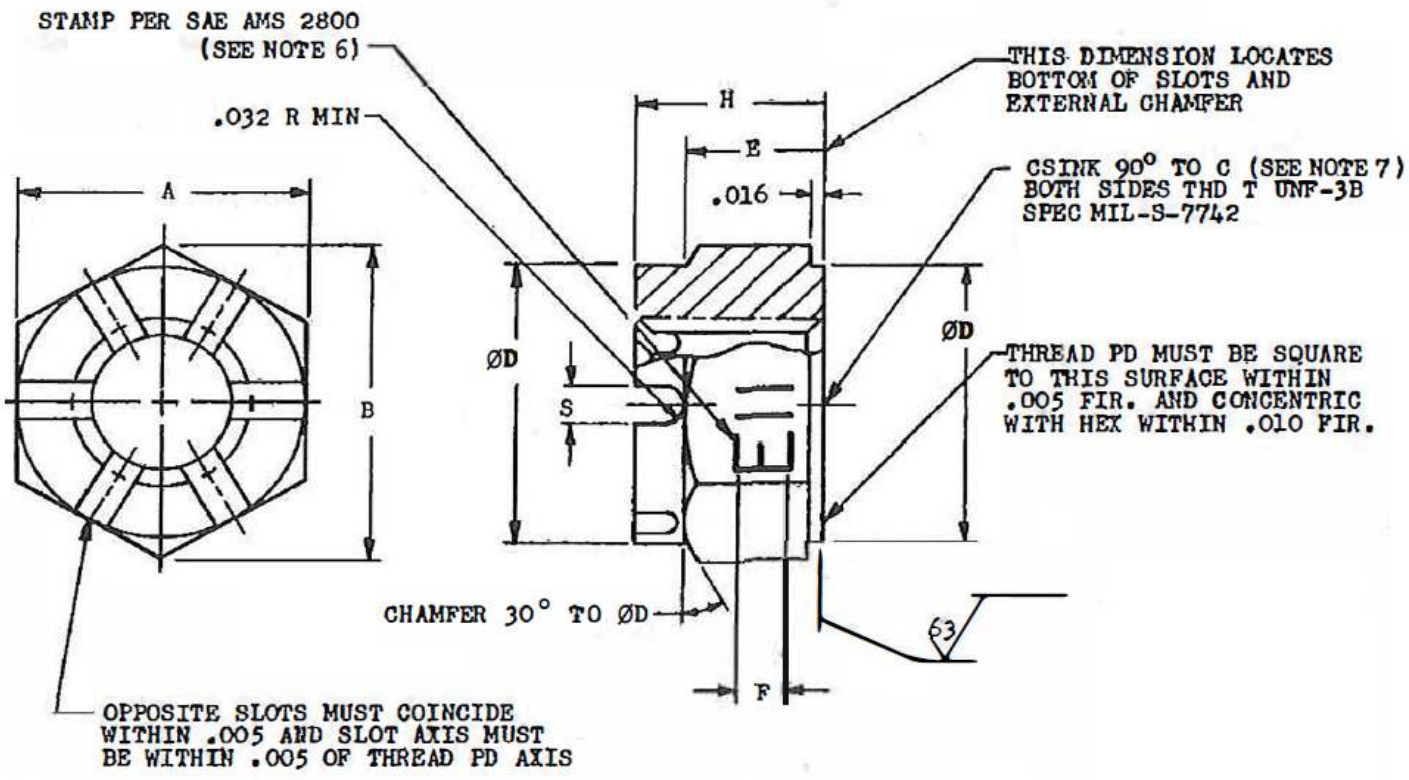


FIGURE 1. NUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Numbers and Dimensions

PART NO.	THD T	A		B	C	D	E	F	H	S	APPROX WT LBS/100
		MIN	MAX	MIN							
AN121551	.190 (no-10)-32	.367	.376	.419	.200	.375	.156	.060 ± .020	.250	.078 + .010 -.005	0.50
AN121552	.250-28	.430	.439	.491	.260	.438	.188	.060 ± .020	.282	.078 + .010 -.005	0.80
AN121553	.3125-24	.492	.502	.561	.322	.500	.234	.120 ± .030	.328	.078 + .010 -.005	1.20
AN121554	.375-24	.553	.564	.631	.385	.562	.281	.120 ± .030	.406	.125	1.70
/a/ AN121555	.4375-20	.616	.627	.703	.448	.625	.328	.120 ± .030	.454	.125	2.30
AN121556	.500-20	.741	.752	.846	.510	.750	.375	.120 ± .030	.562	.125	4.20
AN121557	.5625-18	.865	.877	.987	.572	.875	.422	.120 ± .030	.610	.156	6.50
AN121558	.625-18	.928	.940	1.059	.635	.938	.468	.120 ± .030	.718	.156	8.30
AN121559	.750-16	1.052	1.064	1.200	.760	1.062	.562	.120 ± .030	.812	.156	11.50
AN121560	.875-14	1.239	1.252	1.414	.885	1.250	.656	.120 ± .030	.906	.156	14.30
AN121561	1.000-12	1.427	1.44	1.628	1.010	1.438	.750	.120 ± .030	1.000	.156	17.70
AN121562	.4375-20	.679	.690	.775	.448	.688	.328	.120 ± .030	.454	.125	2.20

/a/ PART NUMBER AN121555 INACTIVE FOR NEW DESIGNS AFTER 25 MARCH 1955. USE AN121562.

NOTES:

1. MATERIALS: STEEL SAE-AMS6322.
2. HARDNESS: ROCKWELL C19-26. PARTS MUST BE HARDENED (OIL QUENCHED) AND TEMPERED BEFORE THREADING.
3. FINISH: CADMIUM PLATE PER SAE-AMS2400.
4. INSPECTION: ALL PARTS SHALL UNDER GO MAGNETIC PARTICLE TESTING IN ACCORDANCE WITH ASTM E1444/E1444M
5. SURFACE ROUGHNESS: SHALL BE IN ACCORDANCE WITH SAE-AS107.
6. MARKING: IN MULTIPLE MARKING OF BAR STOCK, DUPLICATION OF WHOLE OR PART OF SYMBOL OR OFFSET OF SYMBOL SUCH THAT UPPER PORTION APPEARS BELOW LOWER PORTION ON FINISHED PART IS PERMISSABLE PROVIDED POSITIVE IDENTIFICATION IS BELOW. PARTS MUST BE MARKED FOR THREADING.
7. FOR SIZES .3125-24 AND SMALLER C DRILL “C” DIA FROM OPPOSITE END TO DEPTH OF SLOT.
8. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSION ±.010, ANGULAR DIMENSIONS ±5º .
10. DO NOT USE UNASSIGNED PART NUMBERS.

REFERENCE DOCUMENTS: This document rerferences the following

SAE-AMS2400
MIL-S-7742
SAE-AMS2800
SAE-AS107
SAE-AMS6322
ASTM E1444/E1444M

Custodians:

Navy – AS
Air Force - 71
DLA – IS

Preparing activity:

DLA - IS

(Project 5310-2019-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.