


FED SUP CLASS 5305

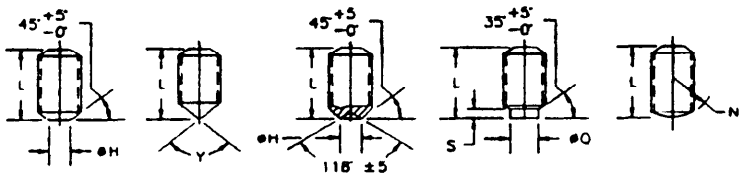


PREFERRED POINT STYLES




INACTIVE FOR DESIGN



THREAD T SPEC MIL-S-7742
HEX SOCKET HEAD

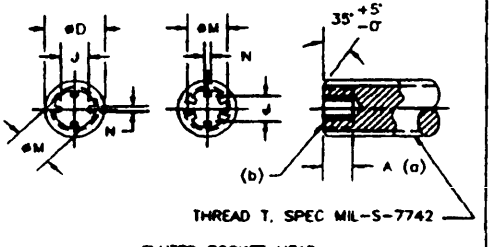

THREAD T, SPEC MIL-S-7742
FLUTED SOCKET HEAD
(NO 2, 4 AND 6 SIZES ONLY)



THREAD T, SPEC MIL-S-7742
SLOTTED HEAD
INACTIVE FOR DESIGN

NOM SIZE	THREAD T	øD MAX	FLUTED SOCKET HEAD: NUMBER OF FLUTES	J SOCKET DIAMETER, MINOR MAX	J SOCKET DIAMETER, MINOR MIN	M SOCKET DIAMETER, MAJOR MAX	M SOCKET DIAMETER, MAJOR MIN	N SOCKET LAND WIDTH MAX	N SOCKET LAND WIDTH MIN
NO 2	NO 2-56UNC-3A	086	4	038	0375	050	049	017	.016
NO 4	NO 4-40UNC-3A	112	6	051	050	062	061	.014	013
NO 6	NO 6-32UNC-3A	138	4	056	.055	.079	078	.023	022

NO'S 2 AND 6 ARE INACTIVE FOR NEW DESIGN AFTER 15 MAY 1994

NOM SIZE	THREAD T	øD MAX	HEX SOCK HEAD F MAX	HEX SOCK HEAD F MIN	SLOTTED HEAD E RAD	SLOTTED HEAD J NOM	SLOTTED HEAD K NOM	TYPES A AND D øH MAX	TYPES A AND D øH MIN	TYPES A AND D R SPHER RAD	TYPE B Y 118° ±2° FOR LENGTHS AND UNDER	TYPE B Y 90° ±2° FOR LENGTHS AND OVER	TYPES E AND C øQ MAX	TYPES E AND C øQ MIN	TYPES E AND C S	TYPES E AND C P	TYPE F N RAD ±.016
NO 2	NO.2-56UNC-3A	086	0355	.0350	.052	.018	.022	.047	.039	031	3/32	7/64	057	.053	022	.043	183
NO 3	NO 3-48UNC-3A	.099	0510	.0500	.060	.018	.025	.054	.045	.037	7/64	1/8	066	.062	.025	.050	078
NO 4	NO 4-40UNC-3A	112	0510	.0500	.067	.020	.028	.061	.051	.040	1/8	5/32	.075	.070	028	056	.084
NO 5	NO.5-40UNC-3A	125	0635	.0625	075	.023	.031	.067	057	045	1/8	3/16	.083	078	.030	.060	094
NO 6	NO 6-32UNC-3A	138	0635	0625	083	.026	.036	.074	.064	.045	1/8	3/16	092	.087	035	.070	109
NO 8	NO 8-32UNC-3A	164	0791	.0781	.099	.028	.041	.087	.076	.050	3/16	1/4	.109	103	040	080	.125
NO 10	NO 10-24UNC-3A	190	.0947	.0937	.114	.032	.048	102	.088	.060	3/16	1/4	127	120	045	090	141
NO 10	NO 10-32UNF-3A	190	0947	0937	144	.032	048	102	.088	.060	3/16	1/4	127	120	045	090	141
1/4	1/4-20UNC-3A	.250	1270	1250	.151	.045	.063	.132	118		1/4	5/16	.156	149	063	125	.188
1/4	1/4-28UNF-3A	.250	1270	1250	151	045	063	132	118		1/4	5/16	156	149	063	125	188
5/16	5/16-18UNC-3A	3125	1582	1562	188	.051	078	172	.156		5/16	3/8	203	195	078	156	234
5/16	5/16-24UNF-3A	3125	1582	1562	188	051	078	172	156		5/16	3/8	203	195	078	156	234
3/8	3/8-16UNC-3A	375	1895	1875	226	064	094	.212	194		3/8	7/16	250	241	094	188	.281
3/8	3/8-24UNF-3A	375	1895	1875	226	064	094	.212	194		3/8	7/16	250	.251	094	188	281
1/2	1/2-13UNF-3A	500	2520	2500	301	081	125	291	270		1/2	9/16	344	334	125	250	375
1/2	1/2-20UNF-3A	500	2520	2500	301	081	.125	.291	270		1/2	9/16	344	334	124	.250	.375

(6) ENTIRE STANDARD REVISED

APPROVED 26 FEB 54 REVISED (1) 26 FEB 54 (2) 24 JUN 60 (3) 29 DEC 72 (4) 8 NOV 74 (5) 23 JUN 75 (6) 15 MAY 1994

REVISER SYMBOLS

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE DISTRIBUTION IS UNLIMITED

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all prevalent standard drawings for the same product and shall be mandatory for the procurement of aeronautical material, or for use in new design effective from the date of approval shown

AMSC N/A

P.A DLA-IS
Other Cust

AIR FORCE - NAVY AERONAUTICAL STANDARD

AN565

SETSCREW-HEXAGON AND FLUTED SOCKET, HEADLESS

PROCUREMENT SPECIFICATION FF-S-200

SUPERSEDES USAF DRAWINGS 565 AND 566

SHEET 1 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5305-2031

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5305

THE NO 7 SIZE IS NON-PREFERRED FOR AIRFRAME USE

NO 3-48, NO 5-40, NO 10-24 1/4-20 5/16-18, 3/8-16 AMD 1/2-13 COARSE THREAD SETSCREWS INACTIVE FOR NEW DESIGN AFTER 1 JULY 1954

NO 4-1 IS INACTIVE FOR NEW DESIGN AFTER 15 MAY 1994

COARSE THREADS

L LENGTH	DASH NUMBERS										
	NO 2-56	NO 3-48	NO 4-40	NO 5-40	NO 6-32	NO 8-32	NO 10-24	1/4-20	5/16-18	3/8-16	1/2-13
1/16 ± 010	2-1		4-1								
1/8 ± 010	2-2	3-2	4-2		6-2	8-2					
3/16 ± 010	2-3	3-3	4-3	5-3	6-3	8-3	10-3	416-3			
1/4 ± 010	2-4	3-4	4-4	5-4	6-4	8-4	10-4	416-4	516-4		
5/16 ± 010	2-5	3-5	4-5	5-5	6-5	8-5	10-5	416-5	516-5		
3/8 ± 010			4-6	5-6	6-6	8-6	10-6	416-6	516-6	616-6	
7/16 ± .010			4-7	5-7	6-7	8-7	10-7				
1/2 ± 010			4-8		6-8	8-8	10-8	416-8	516-8	616-8	816-8
9/16 ± 010			4-9		6-9	8-9	10-9				
5/8 ± 010			4-10		6-10	8-10	10-10	416-10	516-10	616-10	816-10
3/4 ± 011					6-12	8-12	10-12	416-12	516-12	616-12	816-12
7/8 ± 013					6-14	8-14		416-14	516-14	616-14	816-14
1 ± 015						8-16		416-16	516-16	616-16	816-16
1-1/4 ± 019								416-20	516-20	616-20	816-20
1-1/2 ± .022								416-24	516-24	616-24	816-24
1-3/4 ± .026									516-28	616-28	816-28
2 ± 030									516-32	616-32	816-32
2-1/4 ± 031											816-36
2-1/2 ± 031											816-40
2-3/4 ± 031											816-44
3 ± 031											816-48

FINE THREADS

L LENGTH	DASH NUMBERS				
	NO 10-32	1/4-28	5/16-24	3/8-24	1/2-20
1/8 ± 010	1032-2				
3/16 ± 010	1032-3	428-3			
1/4 ± 010	1032-4	428-4	524-4		
5/16 ± 010	1032-5	428-5	524-5		
3/8 ± 010	1032-6	428-6	524-6	624-6	820-6
7/16 ± 010	1032-7	428-7			
1/2 ± 010	1032-8	428-8	516-8	624-8	820-8
9/16 ± 010	1032-9	428-9			
5/8 ± 010	1032-10	428-10	524-10	624-10	820-10
3/4 ± 011	1032-12	428-12	524-12	624-12	820-12
7/8 ± 013		428-14	524-14	624-14	820-14
1 ± 015	1032-16	428-16	524-16	624-16	820-16
1-1/4 ± 019	1032-20	428-20	524-20	624-20	820-20
1-1/2 ± 022		428-24	524-24	624-24	820-24
1-3/4 ± 026			524-28	624-28	820-28
2 ± 030			524-32	624-32	820-32
2-1/4 ± 031					
2-1/2 ± 031					820-40
2-3/4 ± 031					
3 ± 031					820-48

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished or in any way supplied the said drawings specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

REVISED SYMBOLS

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

NOTE This drawing was approved for joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all previously dated drawings for the same product and shall become effective for the procurement of aeronautical supply or for use in new design not later than 6 months after the latest date of approval shown

AMSC N/A

APPROVED 26 FEB 54 REVISED (6) ENTIRE STANDARD REVISED

P.A. DLA-IS Other Cust	AIR FORCE - NAVY AERONAUTICAL STANDARD	AN565
	SETSCREW-HEXAGON AND FLUTED SOCKET, HEADLESS	
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES USAF DRAWINGS 565 AND 566	SHEET 2 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5305-2031

Source: https://assist.dla.mil -- Downloaded: 20260-26T14:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

(a) SOCKET DEPTH A THE DEPTH OF SOCKET SHALL BE AS GREAT AS PRACTICABLE BUT VARYING CONDITIONS PENDER IT INADVISABLE TO SPECIFY DEFINITE VALUES FOR THIS DIMENSION
(b) SOCKET END OF SCREW SHALL BE FLAT AND CHAMFERED THE CHAMFER SHALL EXTEND TO THE BOTTOM OF THE THREAD AND THE EDGE BETWEEN FLAT AND CHAMFER SHALL BE SLIGHTLY ROUNDED
(c) NO 3-48 5-40, 10 24, 1/4-20 5/16-18 3/8-16 1/2-13 SETSCREWS INACTIVE FOR DESIGN AFTER 1 JULY 1954 SLOTTED HEAD SETSCREWS INACTIVE FOR DESIGN AFTER 1 JULY 1954 USE HEXAGON SOCKET SETSCREWS NO 2 AND 6 SIZE FLUTED SOCKET HEAD SETSCREWS ARE INACTIVE FOR NEW DESIGN AFTER 15 MAY 1994 DIMENSIONS IN INCHES

REQUIREMENTS

1 MATERIAL STEEL IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION
CORROSION RESISTANT STEEL IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION

2 FINISH STEEL - CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II CLASS 2 PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 1 JANUARY 1975
CRES - PASSIVATE IN ACCORDANCE WITH QQ-P-35

3 HEXAGON SOCKET AND FLUTED SOCKET SETSCREWS MAY BE SPECIFIED WITH ANY POINT STYLE SHOWN KNURLED POINT ON TYPE D SETSCREW MAY BE SUPPLIED AS OPTIONAL

4 CODES.

ADD POINT STYLE TYPE BEFORE FIRST DASH NUMBER

ADD H BETWEEN DASH NUMBERS FOR SETSCREW WITH HEXAGON SOCKET HEAD

ADD L BETWEEN DASH NUMBERS FOR SETSCREW WITH FLUTED SOCKET HEAD (NO 2, 4 AND 6 SIZES, ONLY)

(c) DASH BETWEEN DASH NUMBERS DESIGNATES SLOTTED HEAD SETSCREW (INACTIVE FOR DESIGN)

ADD C AFTER POINT STYLE TYPE TO DESIGNATE CORROSION RESISTING STEEL SETSCREWS

5 PART NUMBERS.

EXAMPLES OF PART NUMBERS

AN565B1032H12 = SETSCREW WITH TYPE B POINT WITH HEXAGON SOCKET HEAD, NO 10-32 SIZE (190 INCH DIA) 3/4 (12/16) IN LONG, STEEL

AN565B4L5 = SETSCREW WITH TYPE B POINT, WITH FLUTED SOCKET HEAD, NO.4-40 SIZE (112 INCH DIA) 5/16 INCH LONG STEEL

(c) AN565A10-12 = SETSCREW WITH TYPE A POINT, WITH SLOTTED HEAD NO 10-24 SIZE (190 INCH DIA), 3/4(12/16) INCH LONG STEEL (INACTIVE FOR DESIGN)

AN565BC1032H12 = SETSCREW WITH TYPE B POINT, WITH HEXAGON SOCKET HEAD, NO 10-32 SIZE, 3/4 INCH LONG, CORROSION RESISTING STEEL

6 THE LIST OF SETSCREWS THAT ARE CONSIDERED AS STANDARD STOCK ITEMS IS INCLUDED IN SPECIFICATION FF-S-103

7 SCREWS WITH NATIONAL CLASS 3 THREAD MAY BE SUBSTITUTED FOR UNIFIED CLASS 3A THREADS UNTIL EXISTING STOCKS OF NATIONAL CLASS 3 SCREWS ARE DEPLETED UNIFIED CLASS 3A WILL BE MANDATORY ON ALL SCREWS SUPPLIED AFTER 1 JANUARY 1956

NOTES.

1 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS +/-1/64, DECIMALS +/- 005

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.

3 UNLESS OTHERWIS SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

APPROVED 26 FEB 54 REVISED (6) ENTIRE STANDARD REVISED

FSC 5305
DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE DISTRIBUTION IS LIMITED
NOTE The drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product This drawing supersedes an interim standard drawing for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown
AMSC N/A
NOTICE When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto
FF-SCREWS

P A DLA-IS Other Cust	AIR FORCE - NAVY AERONAUTICAL STANDARD SETSCREW-HEXAGON AND FLUTED SOCKET, HEADLESS	AN565
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES USAF DRAWINGS 565 AND 566	SHEET 3 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5305-2031

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the current version before use.