MIL-V-9370D(ASG)

18 OCTOBER 1967

Superseding
MIL-V-009370C (WP)
25 January 1965
MIL-V-9370B(ASG)
25 April 1961

MILITARY SPECIFICATION

VALVE, AUTOMATIC, PRESSURE REGULATING , ANTI-G SUIT

This specification has been approved by the Department of the Air Force and by the Naval Air Systems Command.

1. SCOPE

1.1 This specification covers automatic pressure-regulating valves for anti-g suits.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

BB-N-411	Nitrogen, Technical
PPP-B-636	Box, Fiberboard
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant, (for Carton Sealing)

Military

MIL-P-116	Preservation, Methods of
MIL-F-22191	Films, Transparent, Flexible, Heat Sealable, for Packaging Applications

STANDARDS

Military

MIL-STD-105	Sampling Predures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

FSC 1660

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

MIL-STD-130	Identification Marking of US Military Property
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
AN6253	Filter Element . Hydraulic Replaceable Micronic Line Type
MS24350	Valve, Automatic Pressure Regulating, Anti-G Suit
MS33586	Metal, Definition of Dissimilar

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

30 REQUIREMENTS

3.1 Qualification. - The valve furnished under this specification shall be a product which has been subjected to and which has passed the qualification tests specified herein, and which has been listed on or approved for listing on the applicable Qualified Products List.

3.2 First article inspection. - First article inspection shall be performed as specified in 4.4.

3.3 Materials. - Materials shall conform to applicable specifications and shall be as specified herein and on applicable drawings. Materials which are not covered by specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.3.1 Dissimilar metals. - Unless suitable protected against electrolytic corrosion, dissimilar metals defined in MS33586 shall not be used in intimate contact with each other.

3.3.2 Nonmetallic materials. - Any nonmetallic material that is adversely affected by continued use with air shall not be used.

3.3.2.1 Elastomer components. - Elastomer components, except silicone, shall be not more than 12 months old from the date of manufacture to the date of delivery to any government service or to any airframe or accessory manufacturer.

3.3.3 Protective treatment. - Protective coating which might crack, chip, or scale during normal service life or under extremes of environmental conditions shall not be used.

3.3.4 Standard Parts. - Military standard parts shall be used where they suit the purpose. Materials shall be protected from deterioration in a manner that will in no way prevent compliance with the performance requirements of' this specification. The deterioration considered is that caused by exposure to environmental conditions.

3.4 Design and construction. - The design and construction shall be in accordance with the applicable dash number of MS24350, as specified in the contract or order (see 6.2). The valve shall be designed to pass air at a regulated pressure to air-crewmen anti-g suits. The outlet pressure shall be a function of acceleration force

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

applied to the valve in the direction specified on MS24350. The design shall enable manual operation of the valve and shall provide means for applying weights to simulate the acceleration forces specified on figure 1. The valve shall be designed to perform as specified in 3.5. Moisture in the air source to the valve shall not adversely affect operation of' the valve.

3.4.1 Filter element. - If the valve design is a piston type, the valve shall contain a filter positioned so that ail inlet air passes through the filter before reaching the piston.

3.4.2 Relief valve. - The valve design shall include a pressure relief valve that will relieve at pressures between 8.7 to 11 psig and shall not allow the suit, or outlet pressure to exceed 11 psig.

3.4.3 lubrication. - The valve shall be designed and constructed in such manner that no lubrication is required.

3.4.4 Inlet screen. - The valve shall contain a corrosion-resistant steel, 30 by 30, maximum mesh, 0.010 inch minimum wire diameter inlet screen. All inlet air shall pass through the screen.

3.5 Performance. -

3.5.1 Minimum operating acceleration force. - When tested as specified in 4.8.2, the acceleration force required to open the valve to permit flow greater than 0.01 liter per minute shall be between 1.5g and 2g.

3.5.2 Outlet pressure regulation. - When tested as specified in 4.8.3, the outlet pressure shall be within the range specified on figure 1 for the acceleration force being applied. When the force is being increased, the outlet pressure shall reach the specified range within 2 seconds after application of the force. When the force is being decreased, the outlet pressure shall reach the specified range within 5 seconds after decreasing the force. The outlet pressure shall not fluctuate more than ± 0.2 inch of mercury at any test point.

3.5.3 Leakage. - When tested as specified in 4.8.4, the leakage shall not exceed 0.01 liter per minute.

3.5.4 Anti-chattering. - Men tested as specified in 4.8.5, the valve shal1 not chatter.

3.5.5 Response time. - When tested as specified in 4.8.6, the outlet pressure shall reach the following specified values within the indicated response time:

Force applied from	Outlet pressure	Response time
1g to 6g	As specified on figure 1 for 6g	3 seconds
6g to 1g	0	5 seconds
1g to 10g	As specified on figure 1 for 10g	5 seconds
10g to 1g	0	5 seconds

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

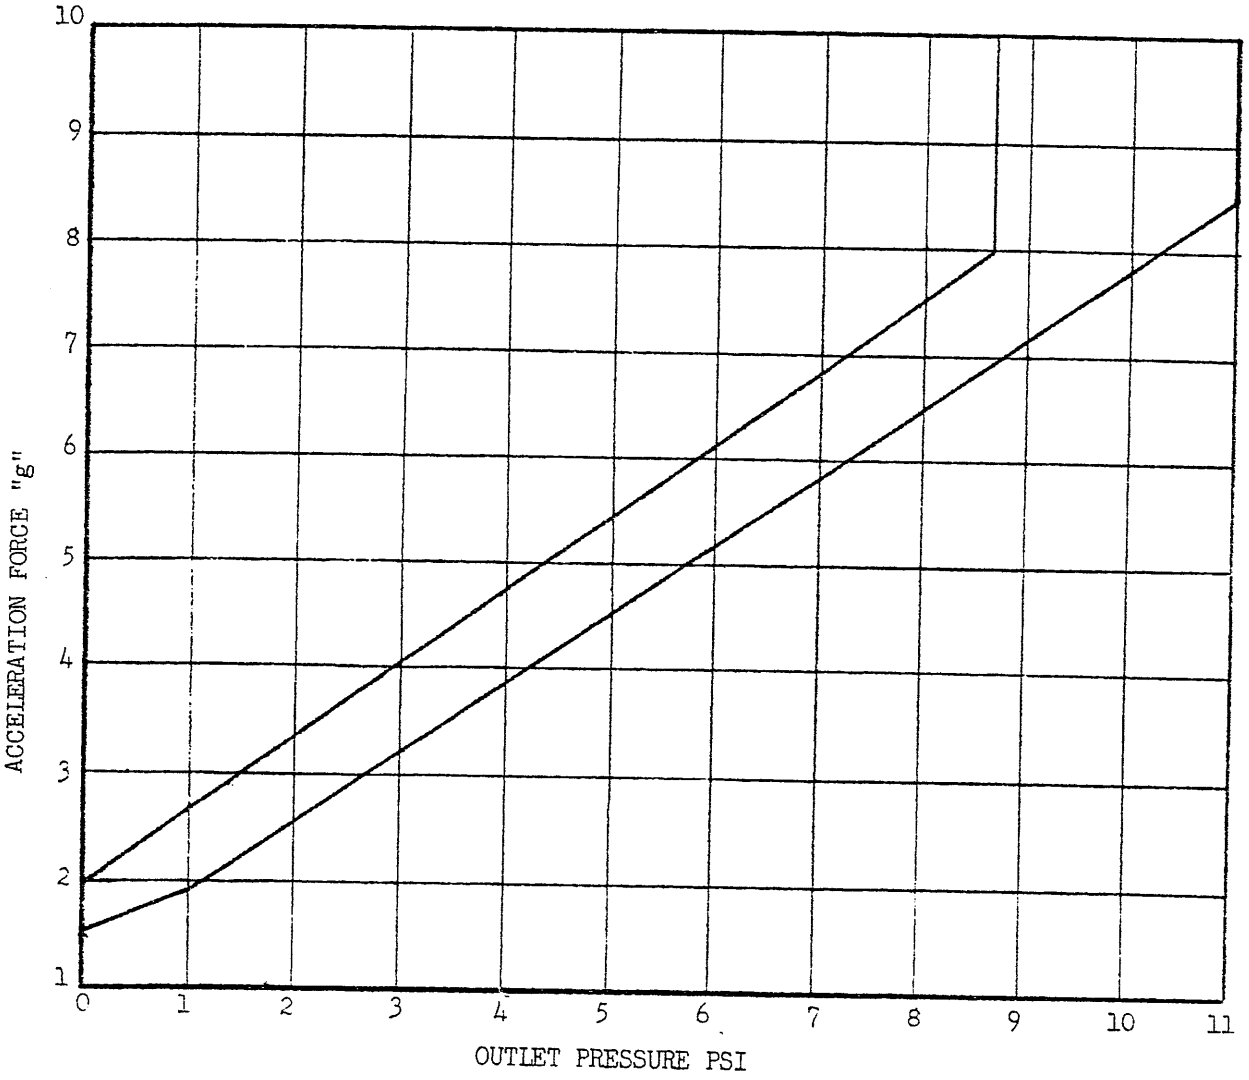


FIGURE 1. Outlet pressure vs acceleration force

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

3.5.6 High temperate (160°F). - The valve shall pass the high temperature test specified in 4.8.7.

3.5.7 Low temperate (-65°F). - The valve shall. pass the low temperate test specified in 4.8.8.

3.5.8 Vibration. - The valve shall pass the vibration test specified in 4.8.9.

3.5.9 Endurance. - The valve shall pass the endurance test specified in 4.8.10.

3.5.10 salt fog. - The valve shall not corrode excessively when subjected to the salt fog test specified in 4.8.11.

3.5.11 Internal corrosion. - The valve shall pass the internal corrosion test specified in 4.8.12.

3.6 Interchangeability. - All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.7 Identification of product. - The valves shall be marked. for identification in accordance with MIL-STD-130 except that the Federal stock number shall be omitted.

3.7.1 Ports. - All inlet and outlet ports shall be clearly identified by permanent markings.

3.7.2 Direction of acceleration force. - The valves shall be marked with an arrow in accordance with MS24 denoting the direction the influencing acceleration force is to be applied.

3.8 Workmanship. - The valves shall be uniform in quality and shall be free from irregularities defects or foreign matter which could adversely affect safety, performance, reliability, or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own. facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assume supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - The examination and testing of the valves shall be classified as follows:

(a) Qualification inspection - Qualification inspection shall consist of examinations and tests performed on samples submitted for approval as qualified valve (see 4.3).

(b) First article inspection - First article inspection shall consist of examinations and tests performed, after award of contract, on samples which are representative of the production valve to determine that the Production valve meets the requirements of this specification (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

(c) Quality conformance inspection - Quality conformance inspection shall consist of examinations and tests performed on individual valves or lots to determine conformance of the valve or lots with the requirements set forth in this specification (see 4.5).

(d) QualitY conformance verification inspection.- Quality conformance verification inspection shall consist of examinations and tests performed on sample valves to verify conformance of the products or lots with the requirements set forth in this specification (see 4.6).

4.3 Qualification inspection. - Qualification inspection shall consist of all the examinations and tests of this specification,

4.3.1 Qualification samples. - Qualification samples shall consist of two valves of each MS dash number for which qualification is desired. Samples shall be forwarded to the Supply Officer, Naval Air Engineering Center, Philadelphia, Pennsylvania 19112, Attn: Director, Aerospace Crew Equipment Laboratory. The samples shall be plainly identified by securely attached durable tags marked with the following information:

Sample submitted by (name) (date) for qualification inspections in accordance with the requirements of MIL-V-9370D and number under authorization (reference authorizing letter and number (see 6.4)).

4.4 First article inspection, - First article inspection shall consist of the expiations and tests deemed necessary by the procuring activity.

4.4.1 First article samples. - Unless otherwise specified, as soon as practicable after award of a contract or order, the manufacturer shall forward two valves of each MS dash number as instructed in the contract or order (see 6.2). The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a contractor is in continuous production of these valves from contract to contracts submission of further first article samples on the new contract may be waived at the discretion of the procuring activity. Approval of the first article samples or the waiving of the first article inspection does not preclude the requirements for the performance of quality conformance inspection, The first article samples shall be plainly identified by securely attached durable tags marked with the following information:

Sample submitted by (name) (date) for first article inspection in accordance with the requirements of MIL-V-937OL under contract No. _____

4.4.1.1 Disposition of samples. - Upon completion of the first article inspection, all the applicable inspection reports and when applicable, recommendations and comments pertinent for use in monitoring production shall be forwarded to the Government quality control representative. One approved valve shall be returned to the manufacturer for use in monitoring production, The other valve shall be consumed or destroyed in the first article inspection and shall not be considered as part of the quantityto be delivered under contract.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection. - Quality conformance inspection shall consist of performing the examinations and tests listed in table I.

TABLE I. Quality conformance inspections, sample size, and acceptance criteria

Inspection	Classification of characteristics	Method	Sample size	Acceptance criteria
Visual examination (see classification of defects)	Critical Minor	4.8.1.1	Every valve for critical defects. 1/ Inspection level II for minor defects.	Reject all valves with any critical defects. An acceptable quality level of 2.5 defects per 100 units for minor defects.
Dimensions and configuration	Major	4.8.1.2	1/ Inspection level S-2	Acceptance number zero Rejection number one
Minimum operating acceleration force	Major	4.8.2	1/ Inspection level I	Acceptance number zero Rejection number one
Outlet pressure regulation	Major	4.8.3	1/ Inspection level S-2	Acceptance number zero Rejection number one
Leakage	Critical	4.8.4	Every valve	Reject all defective units.
Anti-chattering	Major	4.8.5	1/ Inspection level I	Acceptance number zero Rejection number one
Response time	Major	4.8.6	1/ Inspection level S-2	Acceptance number zero Rejection number one
Preparation for delivery	Minor	4.8.1.3	1/ Inspection level S-2	Total acceptable quality level of 4.0 percent defective.

1/ The sample size shall be based only on the applicable sample size code letter corresponding to the specified inspection level of MIL-STD-105.

4.5.1 Sampling. -

4.5.1.1 Inspection lot. -

4.5.1.1.1 Valve. - An Inspection lot size shall be expressed in units of valves. A lot shall consist of valves manufactured essentially under the same conditions and from the same materials and components. The sample unit shall be one valve.

4.5.1.1.2 Preparation for delivery. - An inspection lot size shall be expressed in units of one fully prepared shipping container, containing valves of one type, fully prepared for delivery, from essentially the same materials and components. The sample unit shall be one shipping container, containing valves fully prepared for delivery with the exception that it need not be sealed.

4.5.1.2 Sample size. - The sample size and acceptance criteria shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

4.6 Quality conformance verification inspection. - Unless otherwise specified, after a lot has passed the acceptance criteria specified in 4.5 and before the lot is shipped, a random sample shall be selected from each lot in accordance with MIL-STD-105, inspection level S-3 (see 6.2). The sample size shall be based only on the applicable size code letter corresponding to inspection level S-3. The valves shall be idenitified as specified in 4.4.1 except the propose shall be for quality conformance verification inspection. The samples shall be forwarded as specified in the contract or order to be subjected to the following inspection:

Visual examination
Minimum force
Outlet pressure regulation
Leakage
Anti-chatter
Response time

The inspection shall be conducted in the order listed. The acceptance number shall be zero, rejection number one, for each inspection, except that the acceptable quality level for minor defects revealed by visual examination shall not exceed 2.5 defects per 100 units. The lot, from which the valve samples were selected, shall not be shipped until the samples have been approved by the military service to which the valves are to be delivered. The lot, from which the valve samples were selected, shall be rejected if any sample fails to comply with any requirement of this paragraph. A rejected lot shall not be resubmitted except with the approval of the contracting officer (see 6.5). Upon completion of the tests and examinations, the laboratory shall return the valve samples to the manufacturer.

4.7 Test conditions. -

4.7.1 Temperature and pressure. - Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure. Test instruments shall be calibrated or adjusted according to their required usage in conducting individual tests. The temperature and barometric pressure shall be recorded at the time of inspection, This information shall be available for computation of test data, where required, to normal temperature and pressure (NTP) conditions. NTP conditions are 29.92 tithes of mercury and 70° F.

4.7.2 Acceleration force. - When conducting the tests specified herein, the acceleration force shall be applied to the valve in the direction specified on MS24350. Weights may be used to simulate the acceleration force; however, the qualifying activity reserves the option to calibrate the valve on a centrifuge. In either case, the total g force shall be 1g plus added test weight.

4.7.3 Test medium. - The test medium used in conducting the tests shall be air or nitrogen. The moisture content of the air shall not exceed 0.02 milligram per liter. The nitrogen shall conform to type I, class 1, grade 3 of BB-N-411.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

4.7.4 Test equipment. -

4.7.4.1 Buzzer. - When specified, a buzzer conforming to Line Electric Co. AC buzzer, style MC, 115 volt, 60 cycles, or its equivalent shall be used. The buzzer shall be installed on the mounting plate of the valve in such a manner so as to produce vibration. The buzzer shall be employed to prevent or overcome frictional lag inherent in the valve and to simulate aircraft flight conditions.

4.7.4.2 Tank. -When specified, a tank having a volume of approximately 10 liters shall be used. The tank shall be connected to the outlet port of the pressure-regulating valve.

4.8 Inspection methods. -

4.8.1 Visual examination. -

4.8.1.1 Valve. - The valve shall be examined visually for defects to determine conformance to this specification. The classification of defects, table II, shall be used to classify the defects found.

TABLE II. Classification of defects for visual examination of the valve

Critical	Minor
1. Material imperfections - foreign matter embedded.	201. Marking - missing, insufficient, incorrect, illegible, or not permanent.
2. Surface - unclean, rough, mis-aligned, or containing cracks, nicks, or other flaws.	
3. Any component missing, malformed, fractured, or otherwise damaged.	
4. Any component loose or otherwise not securely retained.	
5. Incorrect assembling or improper positioning of components.	
6. Any functioning part that works with difficulty.	
7. Faulty workmanship or other irregularities.	

4.8.1.2 Dimensions and configuration. - The dimensions and confirmation shall be checked to determine conformance to the specified dash number of MS24350.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

4.8.1.3 Preparation for delivery. - Shipping containers, containing valves, selected as a sample unit from the lot, shall be examined to determine that the packaging, packing, and marking conform to the levels specified in the contract or order and for the existence of defects listed in table III.

4.8.2 Minimum operating acceleration force. - A buzzer shall be installed as specified in 4.7.4.1, during this test. The pressure-regulating valve shall be subjected to inlet pressures of 30, 100, 200, and 300 psi. The acceleration force required to open the valve at each inlet pressure shall be as specified in 3.5.1.

TABLE III. List of defects in preparation for delivery

Item	Defects
Exterior and interior markings	Missing, incorrect, incomplete, illegible, of improper size, location, sequence; or method of application; markings not the same on the interior and exterior containers.
Packaging and packing materials	Any nonconforming component; any component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components, such as incomplete closure of the unit package, intermediate package, container flaps, loose strapping, etc.; bulging or distortion of the containers.
Exterior and interior weight or content	Number per container is more or less than required; gross or net weight exceeds the requirements; more than one type in the same container.

4.8.3 Outlet pressure regulations. - A buzzer shall be installed as specified in 4.7.4.1 and a tank connected as specified in 4.7.4.2 during this test. A source of pressurized gas shall be connected to the inlet port and a mercury manometer connected to the outlet. The inlet gas pressure shall be increased and maintained at 30 psig while acceleration force of 2, 4, 6, 8, 10, 8, 6, 4, 2, and 1g are applied in this sequence to the valve. Each force shall be maintained for at least 30 seconds before applying the next force. After completing the 30 psig inlet pressure phase, the inlet pressure shall be increased to 100, 200 and 300 psig, and the test repeated at each of these inlet pressures. The outlet pressures shall be as specified in 3.5.2.

4.8.4 Leakage. - A source of pressured gas shall be connected to the inlet connections and a flow meter shall be connected to the outlet connection. The inlet pressure shall be increased to and maintained at 300 psig for at least one minute while a force of 1g is applied to the valve. The leakage shall not exceed that specified in 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

4.8.5 Anti-chattering. - A buzzer shall be installed as specified in 4.7.4.1 and a tank connector as specified in 4.7.4.2 during this test. A source of pressurised gas shall be connected to the inlet connection. The inlet pressure shall be increased to and maintained at 300 psig. The pressure-regulating valve shall be fully opened manually and held open until there is a flow through the relief valve. The pressure regulating valve shall then be quickly released. There shall be no chatter in the valves

4.8.6 Response time. - A buzzer shall be installed as specified in 4.7.4.1 and a tank connected as specified in 4.7.4.2 during this test. A source of pressurized gas shall be connected to the inlet connection and the pressure increased to and maintained at 100 psig. A mercury manometer shall be corrected to the outlet. An acceleration force of 6g shall be applied to the valve for at least 30 seconds. The lapse time between application of the force and the time the outlet pressure becomes the value specified for 6g shall be recorded. The acceleration force shall be reduced to lg. The lapse time between the reduction to 1g force and the time the outlet pressure becomes zero shall be recorded. An acceleration force of 10g shall be applied. The lapse time between application of the force and the the the outlet pressure becomes the value specified for 10g shall be recorded. The acceleration force shall be reduced to to 1g. The lapse time between the reduction to 1g force and the time the outlet pressure becomes zero shall be recorded. The lapse time between application of the force and obtaining outlet pressure shall be as specified in 3.5.5.

4.8.7 High temperature exposure. - The pressure-regulating valve shall be conditioned at a temperature of 160 ± 5°F for 8 hours. After this period, the valve shall then be subjected to and pass the tests specified in 4.8.2, 4.8.3, and 4.8.4.

4.8.8 Low temperature exposure. The pressure-regulating valve shall be conditioned at a temperature of -65 ± 5°F for 3 hours. After this period, the valve shall be returned to room temperature and shall then be subjected to and pass the tests specified in 4.8.2, 4.8.3, and 4.8.4.

4.8.9 Random vibration. - The valve shall be subjected to an inlet pressure of 300 psi and random vibration shall be applied to each of the three mutually perpendicular axes of the unit. When using manual equalization, the random vibration shall be applied at 20 percent of test values for sufficient the to adjust the filters. The equalized frequency spectrum shall be continuous and uniform within ± 3 decibels over the frequency range of 20 to 2,000 cycles per second. as determined by analysis using a bandwidth of 25 cps or less (and a sufficient sweep speed and appropriate averaging for constant and accurate analysis, if applicable). Random vibration at $0.05g^2$/cps over the 20 to 2,000 cps bandwidth (10g root mean square overall) having Gaussian distribution and a peak to rms g ratio of 3 to 1 shall be applied to the equipment for a period of $0 minutes in each axis. There shall be no damage to the valve and the valve shall not fall to function as a result of this test. Upon completion of this test, the valve shall be subjected to and pass the tests specified in 4.8.2, 4.8.3, and 4.8.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

4.8.10 Endurance. - A tank shall be connected as specified in 4.7.4.2 during this test. A source of pressurized gas shall be connected to the inlet and the valve shall be subjected to the cyclic operations for the number of cycles, under the conditions, and in the order specified in table IV. A cycle shall consist of varying the force on the valve from to the maximum specified for the specific cycle and back to 1g. The rate of cycling shall be approximately 3 cycles per minute. The outlet pressure at the extreme forces of each cycle shall be as specified on figure 1 for the applied force. After completing all phases of the cyclic operation, the valve shall be subjected to and pass the inspections specified in 4.8.3, 4.8.4, 4.8.5, 4.8.6, 4.8.9, and 4.8.11.

4.8.11 Salt fog. - The valve shall be subjected to a salt fog test in accordance with Method 509 of MIL-STD-810, The valve shall be examined for evidence of excessive corrosion,

4.8.12 Internal corrosion. - With the valve maintained at a temperature of 135 ± 5°F a salt fog in accordance with the salinity requirements of MIL-STD-810 Method 509 at a temperature of 135°F ± 5°F shall be passed through the valve in the normal direction of flow at approximately 3 flow cycles per minute for a duration of at least 15 minutes. The rate of flow of salt fog shall be no less than 30 liters per minute. This procedure shall be performed at least 10 times with the valve dried after each 15 minute period. After completion of the above tests the valve shall be subjected to and pass the tests specified in 4.8.2, 4.8.3, 4.8.4, and 4.8.6.

TABLE IV. Conditions of cyclic operation

Inlet pressure psig	Inlet air temperature °F	Applied force – g	Number of cycles
100	70	1 to 6 to 1	5,000
100	70	1 to 9 to 1	15
300	400	1 to 6 to 1	1,000
300	400	1 to 9 to 1	15
100	400	1 to 6 to 1	4,000
100	70	1 to 6 to 1	5,000

4.8.13 Disassembly and examination. - At the conclusion of all the inspections, the valve shall be disassembled and examined. The valve shall not show evidence of excessive deterioration or wear due to testing which might affect the valve performante. The valve shall be disassembled and examined after any test in which valve failure indicates faulty construction.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. - Each valve shall be cleaned and packaged in accordance with MIL-P-116, Method 1C-1X. The valve shall be cleaned by any appropriate procedures of MIL-P-116 that do not employ petroleum or hydrocarbon products~ Each valve shall then be packaged within a bag fabricated of transparent flexible barrier conforming to MIL-F-22191, type II, and heat sealed. The bag shall be sufficiently oversized to provide cushioning protection for the item.

5.1.2 Intermediate packaging. - Unless otherwise specified, six valves packaged as specified in paragraph 5.1.1, shall be packaged within a container conforming to PPP-B-636, weather-resistant class. The container shall be equipped with crisscrossed corrugated fiberboard separation which shall segregate and hold each valve snugly. The closure shall be accomplished by tape sealing all seams and joints with pressure sensitive tape conforming to PPP-T-76, 2-inch minimum width.

5.1.3 Level Co - Each valve shall be cleaned and packaged in a manner that will afford the item the degree of protection necessary to prevent chemical deterioration and physical damage during transit from contractor's plant to the receiving activity. No petroleum or hydrocarbon compound shall be used in the cleaning or packaging procedure.

5.2 Packing. - Packing shall be levels A, B, or C, as specified (see 6.2).

5.2.1 Level A. - Unless otherwise specified, no more than six intermediate containers of six valves each, packaged as specified in 5.1.1 and 5.1.2, shall be packed in an exterior shipping container conforming to PPP-B-636, weather-resistant class. The intermediate containers shall be arranged within the shipping container in a manner that will conserve volume without impairing container rigidity. The gross weightt of each packed shipping container shall not exceed the limitations of the container specification. The container closure shall be accomplished in accordance with procedures in the appendix of the specification.

5.2.2 Level B. - Packing procedures shall be the same as specified in 5.2.1, except that containers to be used shall be domestic service grade conforming to PPP-B-636, domestic class.

5.2.3 Level Co - The packaged valves, which the carrier requires to be packed, shall be packed for domestic shipment in skipping containers that will assure safe arrival at the lowest possible transportation rate to the petit of delivery. Containers anti procedures employed shall conform to the latest issue of rules and regulations applicable to the mode of transportation utilized.

5.3 Marking. - Nomenclature tags shall be inserted in each bag showing title, part number or other data as required by procuring activity. In addition, interior and exterior containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the currenversion before use.

5.3.1 Precautionary marking. - The following precautionary marking shall appear on each package:

CAUTION: DO NOT ALLOW CONTAMINANTS OF ANY KIND TO BE USED ON OR ABOUT THE VALVES.

6. NOTES

6.1 Intended use. - The pressure-regulating valve covered by this spectification is intended for use in aircraft to sense change in acceleration force and to provide pressure for the operation of aircrewmen anti-g suits according to these changes.

6.2 Ordering data. - Procurement documents should. specify the following:

(a) Title, number, and date of this specification.
(b) MS part number, including dash number of valve required (see 3.4).
(c) Instructions for forwarding first article samples or that first article inspection is not to be performed (see 4.4.1).
(d) Instructions for forwarding quality conformance verification samples or that quality conformance verification inspection is not to be performed (see 4.6).
(e) Levels of preservation, packaging, and packing required (see 5.1).
(f) Data requirements (see 6.3).

6.3 Data. - For the information of contractors and contracting officers, any of the data specified in (a) applicable documents listed in Section 2 of this specific or (b) referenced lower-tier documents need not be prepared for the Government and will not be furnished to the Government unless specified in the contract or order. NavWeps Form 4200/15 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.4 Qualification. - With respect to products requiring qualifications awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in the applicable Qualified Products List, whether or not such products have actually been so listed by that date. The attention of suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualication in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the qualified products list is the Commander, Naval Air Systems Command, Department of the Navy, Washington, D.C. 20360; however, authorization for qualification of products shall be obtained from the U.S. Naval Air Development Center, Johnsville, Warminster, Pennsylvania 18974, Attn: Aerospace Crew Equipment Department, Prior to submission of the samples for qualification inspection, the manufacturer shall submit a request to the Aerospace Crew Equipment Department indicating a date on which the samples can be forwarded and also request an authorization number to accompany the samples,

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.

6,5 Laboratory information. - If first article and quality conformance verification inspections are not waived, the successful bidder will be furnished the name and address of the laboratory to which the samples are to be shipped at the time of the award (see 4.4.1 and 4.6). The cost of the inspection on samples inially submitted from a lot, as required by 4.6,shall be borne by the Government whether the tests and examinations are conducted by the Government or by a laboratory selected by the Government. Samples from a rejected lot shall not be resubmitted for tests and examinations as required by 4.6 without the approval of the contracting officer. The cost of the tests and examinations on samples submitted from a reworked lot or from a new lot which is necessitated by the rejection of a previous lot shall be borne by the manufacturer, whether the inspection is conducted by the Government or by a laboratory selected by the Government,

6.6 Definitions -

6.6.1 Acceleration force. - A force resulting from acceleration that acts upon an aircraft or person in the aircraft.

6.6.2 G-force. - A force exerted upon an object by gravity or by reaction to acceleration or decelerations as in change of direction

custodians:
Navy - AS
Air Force - 11

Reviewer activities:
Navy - AS
Air Force - 11 71

Preparing activity:
Navy - AS

Project No. 1660 F005

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION MIL-V-9370D(ASG) Valve, Automatic, Pressure Regulating, Anti-G Suit

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

( ) Direct Government Contract ( ) Subcontract

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID.

3. IS THE SPECIFICATION RESTRICTIVE?

( ) YES ( ) NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.)

SUBMITTED BY (Printed or typed name and activity) DATE

Form 1426

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:09Z
Check the source to verify that this is the current version before use.