INCH-POUND

MIL-DTL-9370E
05 February 2007
SUPERSEDING
MIL-V-9370D
18 October 1967

DETAIL SPECIFICATION

VALVE, AUTOMATIC, PRESSURE REGULATING, ANTI-G SUIT

Reactivated after 05 February 2007 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers automatic pressure-regulating valves for anti-g suits.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Comments, suggestions or questions on this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division, Code 491000B120-3, Highway 547, Lakehurst, NJ 08733-5100 or emailed to thomas.omara@navy.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59503	-	Nitrogen, Technical

DEPARTMENT OF DEFENSE SPECIFICATIONS

AN6235	-	Filter Element - Hydraulic Replaceable Micronic Line Type. (Inactive for new design)
MS24350	-	Valve, Automatic Pressure Regulating, Anti-G Suit.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-129	-	Military Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-810	-	Environmental Engineering Considerations and Laboratory Tests
MIL-STD-889	-	Dissimilar Metals

(Copies of the above specifications and standards are available online at http://assist.daps.dla.mil/quicksearch or http://assist.daps.dla.mil or from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ-Z1.4	-	Sampling Procedures and Tables for Inspection for Attributes. (DoD Adopted)

(Copies of the above document are available from the American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203-4606 or http://www.asq.org.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. The valve furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract or award (see 4.2 and 6.3).

3.2 First article inspection. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Materials. Materials shall conform to applicable specifications and shall be as specified herein and on applicable drawings. Materials which are not covered by specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and qualified for the purpose intended.

3.3.1 Dissimilar metals. Unless protected against electrolytic corrosion, dissimilar metals specified in MIL-STD-889 shall not be used in intimate contact with each other.

3.3.2 Nonmetallic materials. Any nonmetallic material that is adversely affected by continued use with air shall not be used.

3.3.2.1 Elastomer components. Elastomer components, except silicon, shall be not greater than 12 months old from the date of manufacture to the date of delivery to any government service or to any airframe or accessory manufacturer.

3.3.3 Protective treatment. Protective coating which might crack, chip, or scale during normal service life or under extremes of environmental conditions shall not be used. Materials shall be protected from deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The deterioration considered is that caused by exposure to environmental conditions.

3.3.4 Standard parts. Military standard parts shall be used where they are specified.

3.4 Design and construction. The design and construction shall be in accordance with the applicable dash number of MS24350, as specified in the contract or order (see 6.2). The valve shall be designed to pass air at a regulated pressure to aircrewmen anti-g suits. The outlet pressure shall be a function of acceleration force applied to the valve in the direction specified on MS24350. The design shall enable manual operation of the valve and shall provide means for applying weights to simulate the acceleration forces specified on figure 1. The valve shall be designed to perform as specified in 3.5. Moisture in the air source to the valve shall not adversely affect operation of the valve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

3.4.1 Filter element. If the valve design is a piston type, the valve shall contain a filter, AN6235 or equivalent, positioned so that all inlet air passes through the filter before reaching the piston.

3.4.2 Relief valve. The valve design shall include a pressure relief valve that will relieve at pressures between 8.7 to 11 psig and shall not allow the suit or outlet pressure to be greater than 11 psig.

3.4.3 Lubrication. The valve shall be designed and constructed in such manner that no lubrication is required.

3.4.4 Inlet screen. The valve shall contain a corrosion-resistant steel, 30 by 30, maximum mesh, 0.010 inch minimum wire diameter inlet screen. All inlet air shall pass through the screen.

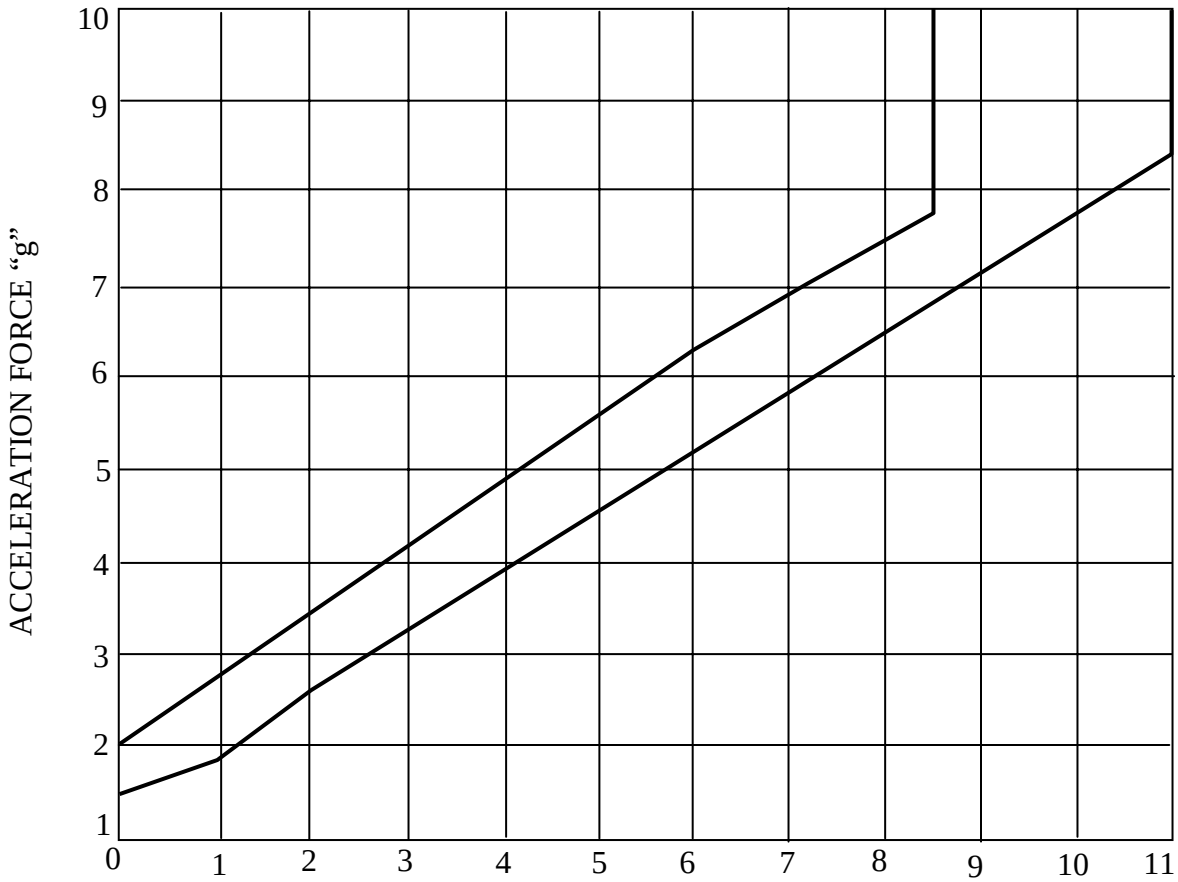


Figure 1. Outlet pressure vs. acceleration force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

3.5 Performance.

3.5.1 Minimum operating acceleration force. When tested as specified in 4.6.2, the acceleration force required to open the valve to permit flow greater than 0.01 liter per minute shall be between 1.5g and 2g (see figure 1, 6.5.1 and 6.5.2).

3.5.2 Outlet pressure regulation. When tested as specified in 4.6.3, the outlet pressure shall be within the range specified on figure 1 for the acceleration force being applied. When the force is being increased, the outlet pressure shall reach the specified range within 2 seconds after application of the force. When the force is being decreased, the outlet pressure shall reach the specified range within 5 seconds after decreasing the force. The outlet pressure shall not fluctuate greater than ± 0.2 inch of mercury at any test point.

3.5.3 Leakage. When tested as specified in 4.6.4, the leakage shall be not greater than 0.01 liter per minute.

3.5.4 Anti-chattering. When tested as specified in 4.6.5, the valve shall not chatter.

3.5.5 Response time. When tested as specified in 4.6.6, the outlet pressure shall reach the following specified values within the indicated response time specified in table I.

TABLE I. Outlet pressure and response time.

Force applied from	Outlet pressure	Response time
1g to 6g	As specified on figure 1 for 6g	3 seconds
6g to 1g	0	5 seconds
1g to 10g	As specified on figure 1 for 10g	5 seconds
10g to 1g	0	5 seconds

3.5.6 High temperature exposure. The valve shall pass the high temperature test specified in 4.6.7.

3.5.7 Low temperature exposure. The valve shall pass the low temperature test specified in 4.6.8.

3.5.8 Vibration. The valve shall pass the vibration test specified in 4.6.9.

3.5.9 Endurance. The valve shall pass the endurance test specified in 4.6.10.

3.5.10 Salt fog. The valve shall not corrode excessively when subjected to the salt fog test specified in 4.6.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

3.5.11 Internal corrosion. The valve shall pass the internal corrosion test specified in 4.6.12.

3.6 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.7 Identification of product. The valves shall be marked for identification in accordance with MIL-STD-130 except that the Federal stock number shall be omitted.

3.7.1 Ports. All inlet and outlet ports shall be clearly identified by permanent markings.

3.7.2 Direction of acceleration force. The valves shall be marked with an arrow in accordance with MS24350 denoting the direction the influencing acceleration force is to be applied.

3.8 Workmanship. The valves shall be uniform in quality and shall be free from irregularities, defects or foreign matter which could adversely affect safety, performance, reliability or durability.

3.9 Package marking. Nomenclature tags shall be inserted in each bag showing title, part number or other data as required by the procuring activity. In addition, interior and exterior containers shall be marked in accordance with MIL-STD-129.

3.9.1. Precautionary marking. The following precautionary marking shall appear on each package:

CAUTION: DO NOT ALLOW CONTAMINANTS OF ANY KIND TO BE USED ON OR ABOUT THE VALVES.

4. VERIFICATION

4.1 Classification of inspection. The examination and testing of the valves shall be classified as follows:

a. Qualification inspection (see 4.2).

b. First article inspection (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall consist of all the examinations and tests of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

4.2.1 Qualification samples. Qualification samples shall consist of two valves of each MS24350 dash number for which qualification is desired. Samples shall be forwarded to Commander, Naval Air Systems Command, Code 4.6.8.3, 48110 Shaw Road, Bldg. 2187, Patuxent River, MD 20670. The samples shall be plainly identified by securely attached durable tags marked with the following information:

> Sample submitted by (name) (date) for qualification inspections
> in accordance with the requirements of MIL-DTL-9370E and number
> under authorization (reference authorizing letter and number (see 6.3)).

4.3 First article inspection. First article inspection shall consist of the examinations and tests deemed necessary by the procuring activity.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of a contract or order, the manufacturer shall forward two valves of each MS24350 dash number as instructed in the contract or order (see 6.2). The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a contractor is in continuous production of these valves from contract to contract, submission of further first article samples on the new contract may be waived at the discretion of the procuring activity. Approval of the first article samples or the waiving of the first article inspection does not preclude the requirements for the performance of conformance inspection. The first article samples shall be plainly identified by securely attached durable tags marked with the following information:

> Sample submitted by (name) (date) for first article inspection in
> accordance with the requirements of MIL-DTL-9370E under
> Contract no. _____.

4.3.1.1 Disposition of samples. Upon completion of the first article inspection, all the applicable inspection reports and when applicable, recommendations and comments pertinent for use in monitoring production, shall be forwarded to the Government quality control representative. One approved valve shall be returned to the manufacturer for use in monitoring production. The other valve shall be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under contract.

4.4 Conformance inspection. Conformance inspection shall consist of performing the examinations and tests listed in table II.

4.4.1 Sampling.

4.4.1.1 Inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

TABLE II. Conformance inspections, sample size, and acceptance criteria.

Inspection	Classification of Characteristics	Method	Sample Size 1/	Acceptance Criteria
Visual examination (see classification of defects, table III)	Critical	4.6.1.1	Every valve for critical defects.	Reject all valves with any critical defects.
	Minor		Inspection level II for minor defects.	
Dimensions and configuration	Major	4.6.1.2	Inspection level S-2	Acceptance number zero Rejection number one
Minimum operating acceleration force	Major	4.6.2	Inspection level I	Acceptance number zero Rejection number one
Outlet pressure regulation	Major	4.6.3	Inspection level S-2	Acceptance number zero Rejection number one
Leakage	Critical	4.6.4	Every valve	Reject all defective units.
Anti-chattering	Major	4.6.5	Inspection level I	Acceptance number zero Rejection number one
Response time	Major	4.6.6	Inspection level S-2	Acceptance number zero Rejection number one

1/ The sample size shall be based only on the applicable sample size code letter corresponding to the specified inspection level of ASQ-Z1.4.

4.4.1.1.1 Valve. An inspection lot size shall be expressed in units of valves. A lot shall consist of valves manufactured essentially under the same conditions and from the same materials and components. The sample unit shall be one valve.

4.4.1.2 Sample size. The sample size and acceptance criteria shall be as specified in table II.

4.5 Test conditions.

4.5.1 Temperature and pressure. Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure. Test instruments shall be calibrated or adjusted according to their required usage in conducting individual tests. The temperature and barometric pressure shall be recorded at the time of inspection. This information shall be available for comparison of test data, where required, to normal temperature and pressure (NTP) conditions. NTP conditions are 29.92 inches of mercury and 70 °F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

4.5.2 Acceleration force. When conducting the tests specified herein, the acceleration force shall be applied to the valve in the direction specified on MS24350. Weights may be used to simulate the acceleration force; however, the qualifying activity reserves the option to calibrate the valve on a centrifuge. In either case, the total g force shall be 1g plus added test weight.

4.5.3 Test medium. The test medium used in conducting the tests shall be air or nitrogen. The moisture content of the air shall be not greater than 0.02 milligram per liter. The nitrogen shall conform to A-A-59503, type I, class 1, grade 3.

4.5.4 Test equipment.

4.5.4.1 Buzzer. When specified, a buzzer conforming to Line Electric Co. AC buzzer, style MC, 115 volt, 60 cycles, or its equivalent shall be used. The buzzer shall be installed on the mounting plate of the valve in such a manner so as to produce vibration. The buzzer shall be employed to prevent or overcome frictional lag inherent in the valve and to simulate aircraft flight conditions.

4.5.4.2 Tank. When specified, a tank having a volume of approximately 10 liters shall be used. The tank shall be connected to the outlet port of the pressure regulating valve.

4.6 Inspection methods.

4.6.1 Visual examination.

4.6.1.1 Valve. The valve shall be examined visually for defects to determine conformance with this specification. The classification of defects, table III, shall be used to classify the defects found.

TABLE III. Classification of defects for visual examination of the valve.

Critical	Minor
1. Material imperfections - foreign matter embedded. 2. Surface - unclean, rough, misaligned, or containing cracks, nicks, or other flaws. 3. Any component missing, malformed, fractured, or otherwise damaged.	201. Marking - missing, insufficient, incorrect, illegible, or not permanent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for visual examination of the valve. (Continued)

Critical	Minor
4. Any component loose or otherwise not securely retained. 5. Incorrect assembling or improper positioning of components. 6. Any functioning part that works with difficulty. 7. Faulty workmanship or other irregularities.	

4.6.1.2 Dimensions and configuration. The dimensions and configuration shall be checked to determine conformance to the specified dash number of MS24350.

4.6.2 Minimum operating acceleration force. A buzzer shall be installed as specified in 4.5.4.1 during this test. The pressure regulating valve shall be subjected to inlet pressures of 30, 100, 200, and 300 psi. The acceleration force required to open the valve at each inlet pressure shall be as specified in 3.5.1.

4.6.3 Outlet pressure regulations. A buzzer shall be installed as specified in 4.5.4.1 and a tank connected as specified in 4.5.4.2 during this test. A source of pressurized gas shall be connected to the inlet port and a mercury manometer connected to the outlet. The inlet gas pressure shall be increased and maintained at 30 psig while acceleration forces of 2g, 4g, 6g, 8g, 10g, 8g, 6g, 4g, 2g, and 1g are applied in this sequence to the valve. Each force shall be maintained for at least 30 seconds before applying the next force. After completing the 30 psig inlet pressure phase, the inlet pressure shall be increased to 100, 200 and 300 psig, and the test repeated at each of these inlet pressures. The outlet pressures shall be as specified in 3.5.2.

4.6.4 Leakage. A source of pressurized gas shall be connected to the inlet connections, and a flow meter shall be connected to the outlet connection. The inlet pressure shall be increased to and maintained at 300 psig for at least one minute while a force of 1g is applied to the valve. The leakage shall be not greater than that specified in 3.5.3.

4.6.5 Anti-chattering. A buzzer shall be installed as specified in 4.5.4.1 and a tank connected as specified in 4.5.4.2 during this test. A source of pressurized gas shall be connected to the inlet connection. The inlet pressure shall be increased to and maintained at 300 psig. The pressure regulating valve shall be fully opened manually and held open until there is a flow

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

through the relief valve. The pressure regulating valve shall then be quickly released. There shall be no chatter in the valve.

4.6.6 Response time. A buzzer shall be installed as specified in 4.5.4.1 and a tank connected as specified in 4.5.4.2 during this test. A source of pressurized gas shall be connected to the inlet connection and the pressure increased to and maintained at 100 psig. A mercury manometer shall be connected to the outlet. An acceleration force of 6g shall be applied to the valve for 30 seconds. The lapse time between application of the force and the time the outlet pressure becomes the value specified for 6g and shall be recorded. The acceleration force shall be reduced to 1g. The lapse time between the reduction to 1g force and the time the outlet pressure becomes zero and shall be recorded. An acceleration force of 10g shall be applied. The lapse time between application of the force and the outlet pressure becomes the value specified for 10g and shall be recorded. The acceleration force shall be reduced to 1g. The lapse time between the reduction to 1g force and the time the outlet pressure becomes zero shall be recorded. The lapse time between application of the force and obtaining outlet pressure shall be as specified in 3.5.5.

4.6.7 High temperature exposure. The pressure regulating valve shall be conditioned at a temperature of 160 $\pm$ 5 °F for 8 hours. After this period, the valve shall then be subjected to and pass the tests specified in 4.6.2, 4.6.3, and 4.6.4.

4.6.8 Low temperature exposure. The pressure regulating valve shall be conditioned at a temperature of - 65 $\pm$ 5 °F for 3 hours. After this period, the valve shall be returned to room temperature and shall then be subjected to and pass the tests specified in 4.6.2, 4.6.3, and 4.6.4.

4.6.9 Random vibration. The valve shall be subjected to an inlet pressure of 300 psi and random vibration shall be applied to each of three mutually perpendicular axes of the unit while maintaining the valve in an upright (button-up) position. When using manual equalization, the random vibration shall be applied at 20 percent of test values for sufficient time to adjust the filters. The equalized frequency spectrum shall be continuous and uniform within $\pm$ 3 decibels over the frequency range of 20 to 2,000 cycles per second (cps) as determined by analysis using a bandwidth of 25 cps or less (and a sufficient sweep speed and appropriate averaging for constant and accurate analysis, if applicable). Random vibration at $(0.05g)^2$/cps over the 20 to 2,000 cps bandwidth (10g root mean square (rms) overall) having Gaussian distribution and a peak to rms g ratio of 3 to 1 shall be applied to the equipment for a period of 10 minutes on each axis. There shall be no damage to the valve, and the valve shall not fail to function as a result of this test. Upon completion of this test, the valve shall be subjected to and pass the tests specified in 4.6.2, 4.6.3, and 4.6.4.

4.6.10 Endurance. A tank shall be connected as specified in 4.5.4.2 during this test. A source of pressurized gas shall be connected to the inlet, and the valve shall be subjected to the cyclic operations for the number of cycles under the conditions and in the order specified in table IV. A cycle shall consist of varying the force on the valve from the maximum specified for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

specific cycle and back to 1g. The rate of cycling shall be approximately 3 cycles per minute. The outlet pressure at the extreme forces of each cycle shall be as specified on figure 1 for the applied force. After completing all phases of the cyclic operation, the valve shall be subjected to and pass the inspection specified in 4.6.3, 4.6.4, 4.6.5, 4.6.6, 4.6.9, and 4.6.11.

4.6.11 Salt fog. The valve shall be subjected to a salt fog test in accordance with MIL-STD-810, Method 509. The valve shall be examined for evidence of excessive corrosion.

4.6.12 Internal corrosion. With the valve maintained at a temperature of 135 ± 5 °F, a salt fog in accordance with the salinity requirements of MIL-STD-810, Method 509, at a temperature of 135 ± 5 °F, shall be passed through the valve in the normal direction of flow at approximately 3 flow cycles per minute for a duration of not less than 15 minutes. The rate of flow of salt fog shall be not less than 30 liters per minute. This procedure shall be performed 10 times with the valve dried after each 15 minute period. After completion of the above tests, the valve shall be subjected to and pass the tests specified in 4.6.2, 4.6.3, 4.6.4, and 4.6.6.

TABLE IV. Conditions of cycle operation.

Inlet pressure psig	Inlet air temperature °F	Applied force - g	Number of cycles
100	70	1 to 6 to 1	5,000
100	70	1 to 9 to 1	15
300	400	1 to 6 to 1	1,000
300	400	1 to 9 to 1	15
100	400	1 to 6 to 1	4,000
100	70	1 to 6 to 1	5,000

4.6.13 Disassembly and examination. At the conclusion of all the inspections, the valve shall be disassembled and examined. The valve shall not show evidence of excessive deterioration or wear due to testing which might affect the valve performance. The valve shall be disassembled and examined after any test in which valve failure indicates faulty construction.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pressure regulating valve covered by this specification is intended for use in aircraft to sense changes in acceleration force and to provide pressure for the operation of military aircrewmen anti-g suits according to those changes.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. MS part number including dash number of valve required (see 3.4).

c. Instructions for forwarding first article samples when first article is required (see 4.3.1).

d. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List, QPL 9370, whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Commander, Naval Air Systems Command, Code 4.6.2.2, 48110 Shaw Road, Bldg. 2187, Patuxent River, MD 20670.

6.4 Laboratory information. If first article is not waived, the successful bidder will be furnished the name and address of the laboratory to which the samples are to be shipped at the time of the award (see 4.3.1). The cost of the inspection on samples initially submitted from a lot shall be borne by the Government whether the tests and examinations are conducted by the Government or by a laboratory selected by the Government. Samples from a rejected lot shall not be resubmitted for tests and examinations without the approval of the contracting officer. The cost of the tests and examinations on samples submitted from a reworked lot or from a new lot which is necessitated by the rejection of a previous lot shall be borne by the manufacturer, whether the inspection is conducted by the Government or by a laboratory selected by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.

6.5 Definitions.

6.5.1 Acceleration force. A force resulting from acceleration that acts upon an aircraft or person in the aircraft (see 3.5.1).

6.5.2 g-force. A force exerted upon an object by gravity or by reaction to acceleration or deceleration as in change of direction (see 3.5.1).

6.6 Subject term (key word) listing.

Acceleration
Deceleration

6.7 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 11

Preparing activity:
Navy - AS

(Project 1660-2006-001)

Review activity:
Air Force - 71, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:09Z
Check the source to verify that this is the current version before use.