MIL-R-9221 (USAF)
3 September 1953
Superseding
No. 32603-A
8 August 1949

MILITARY SPECIFICATION

RELAY, FIELD CONTROL, GENERATOR, 24 VOLT DC,
TYPE M-2

1. SCOPE

1.1 This specification covers one type of aircraft generator field control relay, designated Type M-2.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications, standards, drawing, and publication, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-P-14	Plastic-Materials, Molding, and Plastic-Parts, Molded; Thermosetting
JAN-S-44	Shock-Testing-Mechanism for Electrical Indicating Instruments-(2-1/2 and 3-1/2 Inch, Round, Flush-Mounting, Panel-Type)
MIL-D-5028	Drawings and Data Lists; Preparation of (For Engines, Accessories and Other Auxiliary Equipment)
MIL-W-5088	Wiring, Aircraft, Installation of
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-P-6064	Packaging of Lightweight Aircraft Accessories
MIL-G-6162	Generators, 30 Volt Direct Current, Aircraft Engine Driven, General Specification For
MIL-R-6467	Relay, Solenoid 28V 1/4 AMP DC, Type E-2
MIL-S-7742	Screw-Threads; Standard, Aeronautical
MIL-P-15037	Plastic-Material, Laminated Thermosetting, Sheets, Glass-Cloth Melamine-Resin

U. S. NAVY

17R21	Regulators; Generator Voltage (Aircraft Use)

STANDARDS

MILITARY

MIL-STD-129	Marking of Shipments
MIL-STD-130	Identification Marking of U. S. Military Property

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.

AIR FORCE-NAVY AERONAUTICAL

AN3025	Cutout - Reverse Current, 28 Volt DC System
AN3102	Connector, Receptacle - Box Mounting
AN3155	Rheostat - Aircraft Power
AN3157	Lamp Assembly - Press to Test Indicator
AN3227	Switch --Toggle, Four Pole, Three Hole Mounting

DRAWING

U. S. AIR FORCE

45B7465	Resistor Assembly - Generator Equalizing

PUBLICATION

AIR FORCE-NAVY AERONAUTICAL BULLETIN

143	Specifications and Standards; Use of

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material:

3.1.1 Specifications and standards.- Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with Bulletin No. 143, except as provided in the following paragraph:

3.1.1.1 Standard parts.- AN or MIL Standard parts shall be used wherever they are suitable for the purpose, and shall be identified by their part numbers. Commercial utility parts such as screws, bolts, nuts, cotter pins, et cetera, may be used, provided they have suitable properties and are replaceable by the AN or MIL Standard parts without alteration, and provided the corresponding AN or MIL part numbers are referenced on the drawings and in the parts lists. In applications for which no suitable corresponding AN or MIL part is in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

3.1.2 Metals.- Metals shall be of a corrosion-resistant type or shall be suitably plated or protected to resist corrosion. The use of dissimilar metals in contact which tend toward electrolytic corrosion (particularly brass, copper, or steel in contact with aluminum or aluminum alloy) shall not be acceptable. However, metal plating of dissimilar base metals to provide similar abutting surfaces shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:04Z
Check the source to verify that this is the current version before use.

3.1.3 Protective treatment.- When materials are used in the construction of the relay that are subject to corrosion in salt air or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.

3.2 Design and construction.- The relay shall be designed and constructed so that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, and service.

3.2.1 The relay shall be constructed so that adjustments and repairs can be easily made by the personnel of operating units and overhaul bases.

3.2.2 The relay shall be designed to operate normally at 24V dc and shall be operated in conjunction with generator field circuits. The relay shall be a latch-type unit with 2 operating coils and sufficient contacts to accomplish control of the generator field circuit under various conditions. The tripping coil of the relay shall be energized on a 24V dc circuit by manual contacts, differential current relay contacts, or overvoltage relay contacts. In turn, the field control relay contacts shall open and close the generator field and provide the necessary interlocking circuits. Figure 1 shows a typical circuit diagram for a generator control equipment arrangement. The relays shall be of compact design and of sufficiently rugged construction to withstand the mechanical shocks and stresses incident to their use in aircraft.


3.2.3 Inclosures.- The relay mechanism shall be sealed within a noncorrosive metal container.

3.2.4 Internal connections.- The various coils and contacts shall be connected to a connector as shown on Figure 2.

3.2.5 Hold-in device (latching).- The relay shall be provided with a mechanical hold-in or latching device to hold the main contacts in the closed position when closed by the reset coil. When closed, the movable contacts shall be spring loaded against the stationary contacts to provide a constant contact pressure. The operation of the mechanical hold-in or latching device shall de-energize the reset coil by means of additional contacts within the relay assembly. It shall not be possible to energize the reset coil when the mechanical hold-in or latching device has operated. The mechanical hold-in or latching shall be provided with an electrical release mechanism.

3.2.5.1 When released, the movable contacts shall return to the tripped position and shall be sufficiently spring loaded in the tripped position so as to prevent closing of the contacts under normal vibration or acceleration conditions. When the movable contacts are in the tripped position, the release coil shall be de-energized by means of additional contacts provided within the relay assembly. It shall not be possible to energize the release coil when the relay contacts are in the tripped positions.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:04Z
Check the source to verify that this is the currentversion before use.

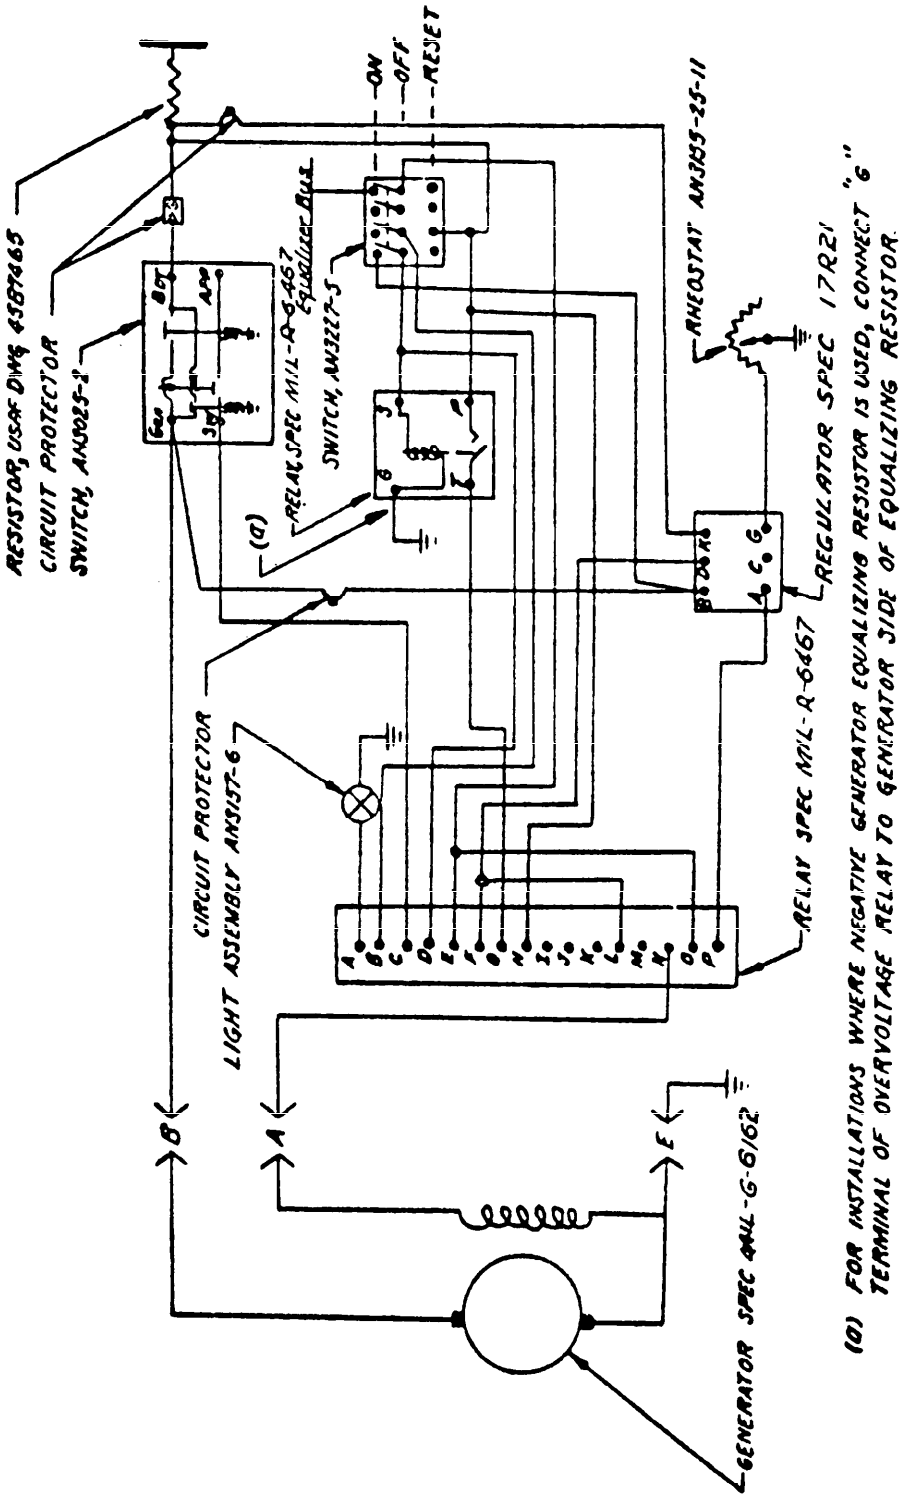


(a) FOR INSTALLATIONS WHERE NEGATIVE GENERATOR EQUALIZING RESISTOR IS USED, CONNECT "G" TERMINAL OF OVERVOLTAGE RELAY TO GENERATOR SIDE OF EQUALIZING RESISTOR.

FIGURE 1

GENERATOR FIELD RELAY INSTALLATION IN MULTI-GENERATOR SYSTEM

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:04Z
Check the source to verify that this is the current version before use.

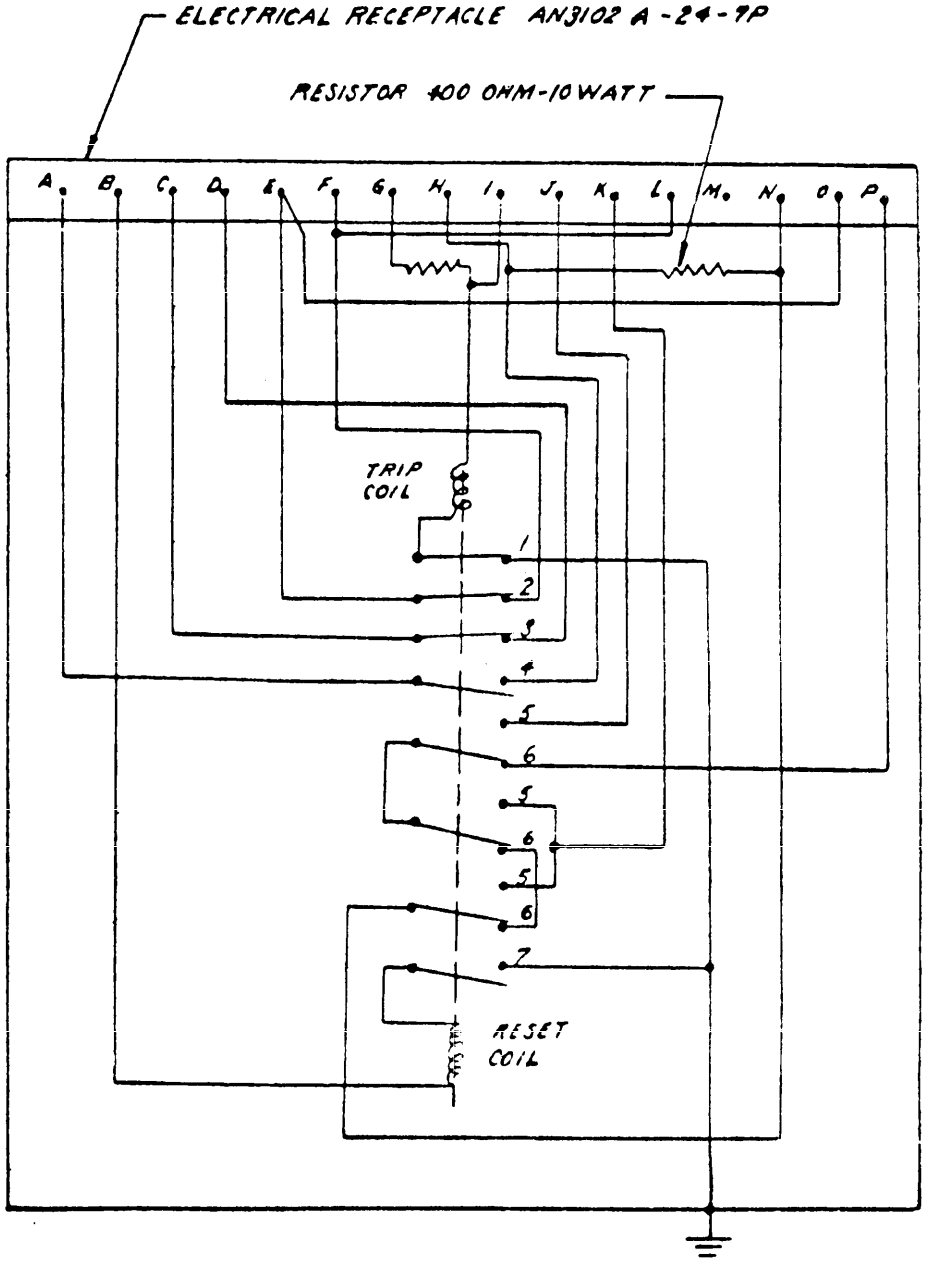

GENERATOR FIELD CONTROL RELAY - INTERNAL WIRING DIAGRAM

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:04Z
Check the source to verify that this is the current version before use.

3.2.5.2 A trip-free manual resetting device shall be incorporated in the field relay as shown on Figure 3.

3.2.6 Coil heads.- If coil heads are used, they shall be of phenolic material in accordance with Specification MIL-P-14 or MIL-P-15037 or other suitable material which will meet the requirements specified herein.

3.2.7 Attitude.- The relay shall be constructed to insure proper operation when mounted in any position.

3.2.8 Mounting bracket.- The mounting bracket shall be an integral part of the relay housing or shall be securely attached thereto in a manner to prevent any movement between the relay and the mounting bracket in service use. Relay attaching bolts or screws shall be readily accessible from the terminal end of the relay assembly.

3.2.9 Contact base.- The contact base shall be of phenolic material in accordance with Specification MIL-P-14 or MIL-P-15037 or other suitable material which will meet the requirements specified herein.

3.2.10 Contact points.- The contact points shall be securely fastened to their respective stationary and movable current-carrying members.

3.2.11 Contact alignment.- The movable contacts shall be self-aligned with the stationary contacts and shall be positive in operation.

3.2.12 Creepage and clearance distance.- The minimum creepage distance between current-carrying parts and ground shall be 1/4 inch, except where one terminal of a switch is connected to ground, the other element of the switch shall have a minimum creepage distance of 1/8 inch. The minimum spacing between current carrying parts and other portions of the relay shall be 1/8 inch.

3.2.13 Contact gap.- The total contact gap shall be no greater than required to fulfill the requirements specified herein.

3.2.14 Operating characteristics:


3.2.14.1 Rating of reset and tripping coils.- The reset coil shall operate at any voltage between 12 and 30V dc and shall be designed to withstand any voltage between these limits for one minute. The tripping coil shall be an intermittent duty coil and shall satisfactorily operate on any direct current voltage between 20 and 175V when energized from the "C" terminal and between 6 and 30V when energized from the "I" terminal.

3.2.14.2 Contacts.- Contact arrangement shall be in accordance with Figure 2.

3.2.15 Base and cover.- The relay and connector shall be fastened to the base of the relay. A removable cover shall be provided to minimize the effects of moisture, sand, and salt spray.

3.2.16 Adjustments.- All adjustments for satisfactory operation of the relay shall be made by the manufacturer prior to delivery. The relay shall operate satisfactorily in service for 2000 hours without further adjustment.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T12:04Z
Check the source to verify that this is the current version before use.

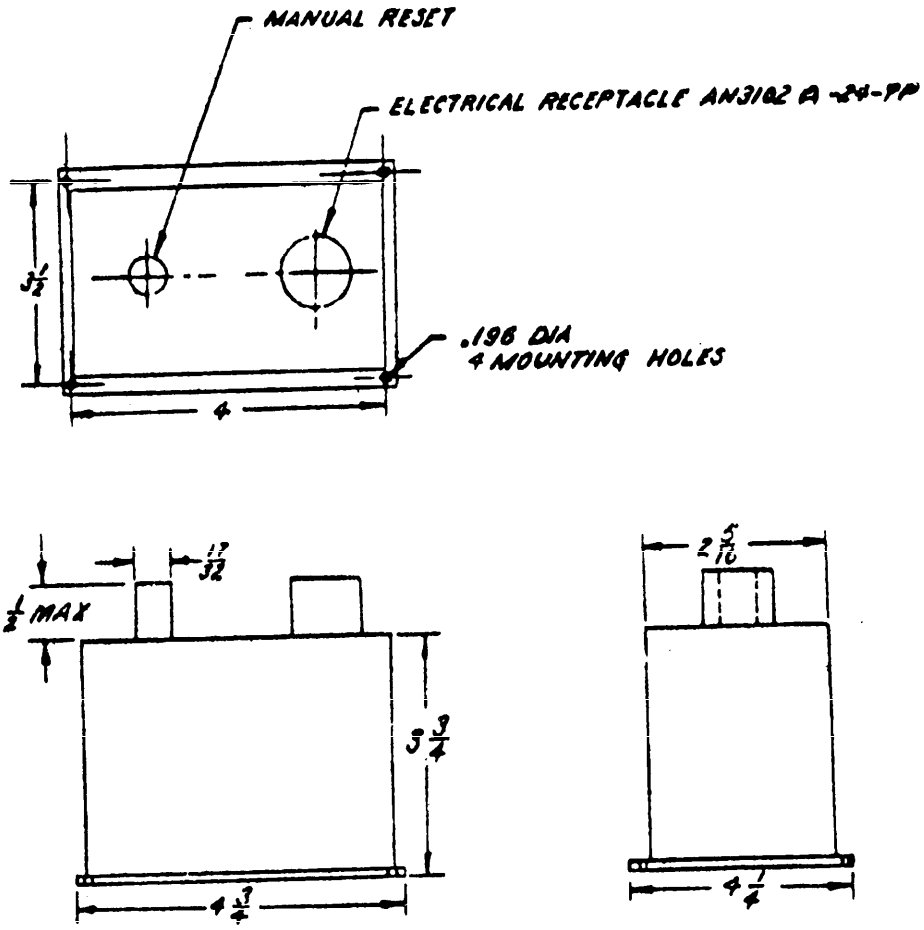

RELAY SIZE AND MOUNTING HOLE DIMENSIONS

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCE ON:
- ANGLES -
- DECIMALS ± .010
- FRACTIONS ± 1/64

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:04Z
Check the source to verify that this is the current version before use.

3.3 Performance.- Unless otherwise specified, the relay shall be capable of operating satisfactorily under the following conditions:

3.3.1 Temperature.- Temperatures ranging from -54 to +71°C.

3.3.2 Humidity.- Relative humidity up to 100 percent including conditions wherein condensation takes place in the form of both water and frost.

3.3.3 Salt spray.- Exposure to salt sea atmosphere.

3.3.4 Sand and dust.- Sand and dust particles as will be encountered in desert areas.

3.3.5 Fungus.- Fungus growth as encountered in tropical climates.

3.3.6 Vibration.- Vibration incident to service use.

3.3.7 Acceleration and shock.- Acceleration and shock forces as anticipated.

3.4 Interchangeability.- All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of Specification MIL-D-5028.

3.5 Dimensions.- The relay shall have maximum overall dimensions and mounting hole dimensions as shown on Figure 3.

3.6 Weight.- The relay shall not weigh more than 2-1/2 pounds.

3.7 Plating.- Terminals, or other metallic parts, shall be suitably plated to meet the requirements specified herein.

3.8 Screw threads.- Screw threads shall be in accordance with Specification MIL-S-7742.

3.9 Identification of product.- Equipment, assemblies, and parts shall be marked for identification in accordance with Standard MIL-STD-130.

3.10 Workmanship:

3.10.1 General.- The relay, including all parts and accessories, shall be constructed and finished in a workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, wiring, impregnation of coils, marking of parts and assemblies, welding and brazing, painting, riveting, machine-screw assemblies, and freedom of parts from burrs and sharp edges.

3.10.2 Dimensions.- Dimensions and tolerances not specified, shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the relay, they shall be held or limited accordingly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.

3.10.3 Screw assemblies.- Assembly screws and bolts shall be tight. The word "tight" means that the screw or bolt cannot be appreciably tightened further, without damage or injury to the screw or bolt or threads.

3.10.4 Riveting.- Riveting operations shall be carefully performed to insure that the rivets are tight and satisfactorily headed.

3.10.5 Cleaning.- The relay shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign material, after final assembly. Burrs and sharp edges, as well as resin flash that may crumble, shall be removed.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Classification of tests.- The inspection and testing of relays shall be classified as follows:

4.1.1 Qualification tests.- Qualification tests are those tests accomplished on samples submitted for qualification as a satisfactory product.

4.1.2 Inspection tests.- Inspection tests are those tests accomplished on relays submitted for acceptance under contract.

4.2 Test conditions:

4.2.1 General.- Unless otherwise specified, the relay shall be tested at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately +25°C).

4.2.2 Cable size.- Cable used in any specified test shall be of applicable size as specified in Specification MIL-W-5088, determined by the rated load of the relay.

4.3 Qualification tests:

4.3.1 Prior qualification.- Unless otherwise specified by the Procuring Agency, relays which have not previously passed a qualification test, or which have passed the qualification test and have been modified in any manner, shall satisfactorily pass a qualification test prior to the acceptance of any relay.

4.3.2 Qualification test samples.- Qualification test samples shall consist of 6 relays. Samples shall be appropriately identified with the manufacturer's own part number and any additional identification required by the authorizing letter.

4.3.3 The qualification test shall consist of the following tests and those specified under the inspection tests:

4.3.3.1 Acceleration.- The relay shall be subjected to an acceleration test in accordance with Procedure II of Specification MIL-E-5272 with the additional requirement that the accelerating force shall be applied in both

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:04Z
Check the source to verify that this is the currentversion before use.

directions through each of the 3 major axes. The acceleration force shall be 25 g. A test lamp or other suitable indicating devices shall be connected across the contacts to determine that the acceleration does not result in the closing or opening of the contacts when the relay is in either the reset or tripped position.

4.3.3.2 Shock.- The relay shall be subjected to a shock test in accordance with Procedure I of Specification MIL-E-5272. The magnitude of shock shall be 25 g. The relay shall be subjected to 3 shocks in both directions through each of the 3 major axes. The relay shall be checked in both the reset and tripped positions. When the contacts of the relay being tested are in the closed position, they shall remain sufficiently closed so that a sensitive relay with a 2-millisecond drop-out time will remain in the energized position. When the contacts of the relay being tested are in the open position, they shall remain sufficiently open so that a sensitive relay with a 10-millisecond pick up value will remain in the de-energized position. If more than one pair of contacts are included in the test relay, all contact pairs shall be tested separately. A shock mechanism in accordance with Specification JAN-S-44 altered for relay mounting shall be suitable for conducting the test.

4.3.3.3 Overload.- The relay shall be subjected to the following operations simultaneously and there shall be no failure as a result of the test:

4.3.3.3.1 No. 1 contacts breaking 100 times at a rate of 10 cpm, the trip coil current at 175V dc.

4.3.3.3.2 No. 2 contacts making and breaking 100 times at a rate of 10 cpm, 2 amp at 10V dc. The load current shall be on for 1/2 second and off for 5-1/2 seconds.

4.3.3.3.3 No. 3 contacts breaking 100 times at a rate of 10 cpm, 4 amp at 175V dc. The load current shall be on for 1/2 second and off for 5-1/2 seconds.

4.3.3.3.4 No. 4 contacts making and breaking 100 times at a rate of 10 cpm, 1/4 amp at 40V dc. The load current shall be on for 5-1/2 seconds and off for 1/2 second.

4.3.3.3.5 No. 5 contacts making 100 times at a rate of 10 cpm, 30 amp at 30V dc. The load current shall be on for 5-1/2 seconds and off for 1/2 second.

4.3.3.3.6 No. 6 contacts making and breaking 100 times at a rate of 10 cpm, 50 amp at 175V dc. The load current shall be on for 1/2 second and off for 5-1/2 seconds.

4.3.3.3.7 No. 7 contacts breaking 100 times at a rate of 10 cpm, reset coil current at 30V dc.

Source: https://assist.dla.mil -- Downloaded: 20260-17T12:04Z
Check the source to verify that this is the current version before use.

The potential drop shall be measured to determine that the final potential drop does not exceed the initial potential drop by more than 20 and is below 110 percent of the values specified below:

Contact No.	Load (Amp)	Potential Drop (mv)
2	2	25
3	1	50
4	1/4	5
5	15	300
6	10	200

4.3.3.3.8 The preceding cycling test shall be repeated at a pressure corresponding to an altitude of approximately 50,000 feet. The potential drop shall be measured to determine that the final potential drop does not exceed the initial potential drop by more than 20 percent and is below 110 percent of the value specified in 4.3.3.3.7.

4.3.3.4 Environmental.- The relay shall be subjected to the following tests conducted in accordance with Specification MIL-E-5272. At the end of each test, the relay shall be examined for damage and shall function satisfactorily.

(1) Low temperature.- Procedure I.
(2) High temperature - Procedure I.
(3) Humidity.- Procedure I.
(4) Salt Spray.- For a period of 50 hours.
(5) Sand and dust.- Procedure I.
(6) Mildew resistance.- Procedure I.

4.4 Inspection tests:

4.4.1 Individual tests.- Each relay shall be subjected to the following tests:

4.4.1.1 Examination of product.- Each relay shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and marking.

4.4.1.2 Insulation.- A potential of 1000V rms, at commercial frequency, shall be applied between the terminals and other exposed metal parts for a period of 60 seconds. The coil ground connection shall be disconnected for this test. There shall be no failure as a result of this test.

4.4.1.3 Operating voltage.- A potential of 12 and 30V dc, shall be applied to the reset coil. The relay shall successfully operate under both conditions. Potentials of 20 to 175V dc, shall be applied to terminal "G" and in all cases the relay shall operate satisfactorily. Potentials of 6 to 30V dc shall be applied to terminal "I", and in all cases the relay shall operate satisfactorily.

4.4.2 Quality control tests.- Five relays shall be selected at random from every 500 or fraction thereof produced and subjected to the following tests:

4.4.2.1 When quality control tests are specified on a number of items that are selected from a production run and one or more of this number fails

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.

to meet the specified tests, acceptance of all items still on hand and subsequent production will be withheld until the extent and cause of failure is determined. For operational reasons, individual tests may be continued pending investigation of a quality control test failure. However, final acceptance of the items on hand and subsequent production is contingent upon the inspector's decision regarding the overall conformance of the product to specification requirements. When corrective action has been accomplished, all necessary tests shall be repeated. If investigation indicates that the defects may exist in items previously accepted, full particulars concerning the defects, including recommendations for correction, will be furnished to the contracting officer.

4.4.2.2 Endurance.- After the relay has been subjected to the tests specified in 4.3.3.3, it shall be subjected to 15,000 operations as follows. Timing of each cycle shall be as specified in 4.3.3.3.

4.4.2.2.1 No. 1 contacts breaking at a rate of 10 times per minute, trip coil current at 30V dc.

4.4.2.2.2 No. 2 contacts making and breaking at a rate of 10 times per minute, 2 amp, at 10V dc.

4.4.2.2.3 No. 3 contacts breaking at a rate of 10 times per minute, one amp at 30V dc.

4.4.2.2.4 No. 4 contacts making and breaking at a rate of 10 times per minute, 1/4 amp at 30V dc.

4.4.2.2.5 No. 5 contacts making at a rate of 10 times per minute, 15 amp at 30V dc.

4.4.2.2.6 No. 6 contacts making and breaking at a rate of 10 times per minute, 10 amp at 30V dc.

4.4.2.2.7 No. 7 contacts breaking at a rate of 10 times per minute, reset coil current at 30V dc. The relay shall show no signs of failure as a result of the above tests. The potential drop shall be measured to determine that the final potential drop does not exceed the initial potential drop by more than 20 percent and is below 110 percent of the values specified in 4.3.3.3.7.

4.4.2.3 Vibration.- The relay shall be subjected to vibration consisting of simple harmonic motion having an amplitude of approximately 1/32 inch (total excursion 1/16 inch) and a frequency varied uniformly between the approximate limits of 10 to 55 cycles and back to 10 cps. The entire cycle of frequencies shall be accomplished in one to 5 minutes. The relay shall be mounted in each of 3 positions and vibrated continuously for a period of 5 hours in each position. There shall be no failure as a result of this test.

4.4.2.3.1 Following the test specified in 4.4.2.3, the relay shall be set in the tripped position and vibrated through the frequency range and at the amplitude as specified above. Vibration shall be conducted with the relay mounted in each of 3 positions. Test lamps or other suitable indicating devices shall be connected across the contacts during the tests. The normally closed

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.

contacts shall not open and the normally open contacts shall not close during this test. The relay shall then be set in the reset position and the above test repeated. The normally closed contacts shall not open and the normally open contacts shall not close during this test.

4.5 All parts, specimens, or assemblies destroyed in making tests required by this specification or drawings, to determine compliance with the specification or drawings, shall be in addition to the quantity specified in the contract or purchase order and shall be furnished without increasing the cost of the contract or order.

5. PREPARATION FOR DELIVERY

5.1 General.- The packaging, packing, and marking requirements specified herein apply only to direct purchases by, or direct shipments to the Government.

5.2 The relay shall be packaged and packed for shipment in accordance with Group X of Specification MIL-P-6064 in a Type II, Class I container.

5.3 Marking of shipments.- Interior packages and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129. The nomenclature shall be as follows:

Relay, Field Control, Generator, For 24V DC System
Type M-2
Specification MIL-R-9221
Mfr's. Part No. _____*_____

* Applicable data shall be entered by the contractor.

6. NOTES

6.1 Use.- The Type M-2 generator field control relay covered by this specification is intended for use in aircraft to provide control of 24V dc generators by opening and closing the generator shunt field.

6.2 Qualification tests.- In the procurement of products requiring qualification, the right is reserved to reject bids on products that have not been subjected to the required tests and found satisfactory for inclusion on a Qualified Products List. The attention of suppliers is called to this requirement, and manufacturers are urged to communicate with the Wright Air Development Center and arrange to have the products that they propose to offer to the Air Force tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from the Commander, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, Attention: WCLE.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T12:04Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 20261O-17T12:04Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Commanding Officer
AFLC (SCEES)
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:04Z
Check the source to verify that this is the current version before use.