MIL-R-9345(USAF)
17 February 1954
Superseding
No. 41102-A
19 August 1949

MILITARY SPECIFICATION

REGULATOR, AIR PRESSURES AIRCRAFT CABIN, GENERAL SPECIFICATION FOR

1. SCOPE

1.1 This specification covers the general requirements for cabin air pressure regulators.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications, standards, and Publications of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zinc Plating (Electrodeposited)

MILITARY

MIL-D-5028	Drawings and Data Lists; Preparation of (For Engines, Accessories and Other Auxiliary Equipment)
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-P-5633	Packaging and Packing of Aircraft Material in Steel Shipping Containers
MIL-L-6082	Lubricating Oil; Aircraft-Engine
MIL-I-6181	Interference Limits, Tests and Design Requirements, Aircraft Electrical and Electronic Equipment
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form Symbol ANPT
MIL-S-7742	Screw Threads; Standard, Aeronautical
MIL-L-7808	Lubricating Oil, Gas Turbine, Aircraft
MIL-M-8609	Motors, Direct-Current, 28-Volt System, Aircraft, General Specification For
MIL-A-8625	Anodic-Coatings, For Aluminum and Aluminum Alloys

U. S. AIR FORCE

32466	Design of Electrical Equipment in Aircraft, General Specification for

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-129	Marking of Shipments
MIL-STD-130	Identification Marking of U.S. Military Property

AIR FORCE-NAVY AERONAUTICAL

AND10398	Metals - Definition of Dissimilar

PUBLICATION

AIR FORCE-NAVY AERONAUTICAL BULLETIN

143	Specifications and Standards; Use of

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring ageney or as directed by the contracting officer.)

3. RETIREMENTS

3.1 Material:

3.1.1 Specifications and standards. - Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with Bulletin No. 143, except as provided in the following paragraph:

3.1.1.1 Standard parts. - AN or MIL standard parts shall be wed wherever they are suitable for the purpose, and shall be identified by their part numbers. Commercial utility parts, such as screw, bolts, nuts, cotter pins, et cetera, may be used, provided they have suitable properties and are replaceable by the AN or MIL standard parts without alteration, and provided the corresponding AN or MIL part numbers are referenced on the drawings and in the parts listes. In applications for which no suitable corresponding AN or MIL part is in effect on date of invitation for bids, commercial parts may be used provided they conform to the requirements of this specification.

3.1.2 Metals. - All metals shall be of the corrosion-resistant type, unless suitably protected to resist corrosion during normal service life. The use of dissimilar metals shall be avoided whenever practicable. Dissimilar metals are defined in Standard AND10398.

3.1.3 Nonmagnetic materials.- Nonmagnetic materials shall be used for all parts of the regulator, except where magnetic materials are essential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

3.1.4 Non-ferrous materials. - Non-ferrous materials shall be used for all parts of the regulator, except where ferrous materials are essential.

3.1.5 Castings. - Castings shall be of high grade quality, clean, sound and free from blow holes, porosity, cracks, and any other defects.

3.1.6 Protective treatment.- When materials are used in the construction of the regulator that are subject to corrosion in salt air or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmopheric conditions, shall be avoided.

3.2 Design and construction.- The regulator shall control cabin pressure by acting as a self-controlled bleeder of cabin air. The regulator shall be designed and oonstructed so that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other condition incident to shipping, storage, installation, and service.

3.2.1 The regulator shall be constructed so that adjustments and repairs can be easily made by the personnel of operating units and overhaul bases.

3.2.2 Ports and passages.- Ports and passages shall be of adequata size to prevent lag in the operation of the regulator.

3.2.2 Static connection. - Provisions shall be made so that the static connection is adaptable to the most suitable static pressure source, remote, if necessary.

3.2.4 Capacity. - The rated capacity of the regulator shall be as specified in the detail specification.

3.2.5 Operational characteristics. - The operational characteristics of the regulator shall be as specified in the detail specification.

3.2.5.1 Constant ratio range operation. - The regulator shall incorporate a range for controlling cabin prossure to follow a line of constant relative gas expansion only if so specified in the detail specification.

3.2.5.2 Combat changeover machanism.- A combat changeover mechanism for ohanging over from normal to combat pressure differentials between cabin and ambient altitude shall be provided only if so specified in the detail specification. This mechanism shall be remotely controllable. In case of electrical actuation, which shall preferably be a selenoid, either 28V dc or 400 cycle 200/115V ac shall be used.

3.2.5.2.1 Electrical requirements. - Electrical components shall meet the requirement of Specification No. 32466 and shall comply with te radio noise requirements of Specification MIL-I-6181.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

3.2.5.2.2 Field calibration. - The design of the regulator shall be such that it can be calibrated for all ranges, except unpressurized, with bench testing equipment without the use of a pressure chamber.

3.2.5.3 Shut off. - Means shall be incorporated whereby the regulator cna be made inoperative in the closed position.

3.3 Performance. - The regulator shall be capable of satisfactory operation when subjected to the following conditions:

(1) Temperature - Temperatures ranging from -54° to +71°C.
(2) Humidity - Relative humidity up to 100 percent including conditions wherein condensation takes place in the form of both water and frost.
(3) Salt spray - Exposure to salt sea atmosphere.
(4) Fungus - Fungus growth as encountered in tropical climates.
(5) Explosive atmosphere - Operation within an explosive vapor within or surrounding the equipment.
(6) Vibration - Vibration incident to service use.
(7) Sand and dust - Sand and dust particles as will be encountered in desert areas.
(8) Oil Contamination - Contamination of cabin supply air by engine lubricants.
(9) Smoke contamination - Contamination of cabin air as a result of tobacco smoking by flight personnel.

3.4 Interchangeability. - All parts having the same manufacturers part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of Specification MIL-D-5028.

3.5 Filter. - A suitable filter shall be installed to exclude foreign material from the interior of the regulator.

3.6 Mounting flange. - The mounting flange shall conform to the drawing as specified in the detail specification.

3.7 Lubrication. No lubrication shall be required in the field.

3.8 Threads:

3.8.1 Pipe. - Pipe threads shall conform to specification MIL-P-7105.

3.8.2 Screw. - Screw threads shall conform to Specification MIL-S-7742.

3.8.3 Locking threaded parts .- All internal or external parts that are threaded shall be securely locked, except in the case of pipe thread connections.

3.9 Weight. - The weight of the regulator shall not exceed that specified in the detail specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

3.10 Finishes and protective coatings:

3.10.1 Plating. - Steel parts in contact with aluminum or aluminum alloys shall be cadmium plated in accordance with Specification QQ-P-416 or zinc plated in accordance with Specification QQ-Z-325. Cadmium plating shall be Type II or III, and of a class that is adequate to achieve the degree of protection required.

3.10.2 Anodizing. - All aluminum alloy parts shall be anodized, unless otherwise required, in accordance with Specification MIL-A-8625.

3.11 Identification of product. - Equipment, assemblies, and parts shall be marked for identification in accordance with Standard MIL-STD-130.

3.12 Tag.- A tag shall be securely attached to the regulator, marked to indicate the calibration of the regulator in each range of operation of which the regulator is capable.

3.13 Workmanship:

3.13.1 General.- The regulator, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, marking of parts and assemblies, welding and brazing, painting, riveting, machine-screw assemblies, and freedom of parts from burrs and sharp edges.

3.13.2 Dimensions. - Dimensions and tolerances not specified, shall be a close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the regulator, they shall be held or limited accordingly.

3.13.3 Screw assemblies. - Assembly screws and bolts not having specific torque requirements shall be tight. The word “tight” means that the screw or bolt cannot be appreciably tightened further without damage or injury to the screw or bolt or threads.

3.13.11 Riveting. - Riveting operations shall be carefully performed to insure that the rivets are tight and satisfactorily headed.

3.13.5 Gears.- Gear assembles shall be properly aligned and meshed, and shall be operable without interference, tight spots, loose spots, or other irregularities. Where required for accurate adjustments, gear assemblies shall be free from backlash.

3.13.6 Cleaning. - The regulator shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign material after final assembly. Burrs and sharp edges, as well as resin flash that may crumble, shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Classification of tests. - The inspection and testing or regulators shall be classified as follows:

4.1.1 Qualification tests. - Qualification tests are those tests accomplished on samples submitted for qualification as a satisfactory product.

4.1.2 Inspection on tests. - Inspection tests are those tests accomplished on regulators submitted for acceptance under contract.

4.2 Test conditions:

4.2.1 Standard atmospheric conditions. - Whenever the pressures and temperature existing at the time of tests are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately 25°C). When tests are made with atmospheric pressure or room temperature differing materially from the above values, propor allowance shall be made for the difference from the specified condition.

4.2.2 Cleaning. - Before testing any regulator, except as otherwise specified in 4.3.3.3, all oil, grease, or any other temporary corrosion resistant oompound shall be removed from the interior and exterior parts of the regulator.

4.2.3 Test setup No. 1. - Test setup No. 1 shall be schematically similar to that shown on Figure 1 and shall be used for all qualification tests except for those necessitating special equipment, such as vibration, salt spray, et cetera.

4.2.4 Test chamber. - The volume of the cabin chamber shall be proportional to the rated regulator capacity and shall be no greater than the cabin volume specified in the detail specification.

4.2.4.1 Air heating unit. - The air heating unit shall be capable of maintaining a temperature of 74 ± 2 °C in the testing chamber during the specified tests.

4.2.4.2 Air cooling and dehumidifying unit. - The air cooling and dehumidifying unit shall be capable of maintaining a temperature of -54 ± 2°C in the testing chamber during the specified tests.

4.2.5 Test setup No. 2. - Test setup No. 2 shall be schematically similar to that shown on Figure 2 and shall be used for the endurance cyling for the endurance test and for contaminating the regulator for the contaminated air test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.


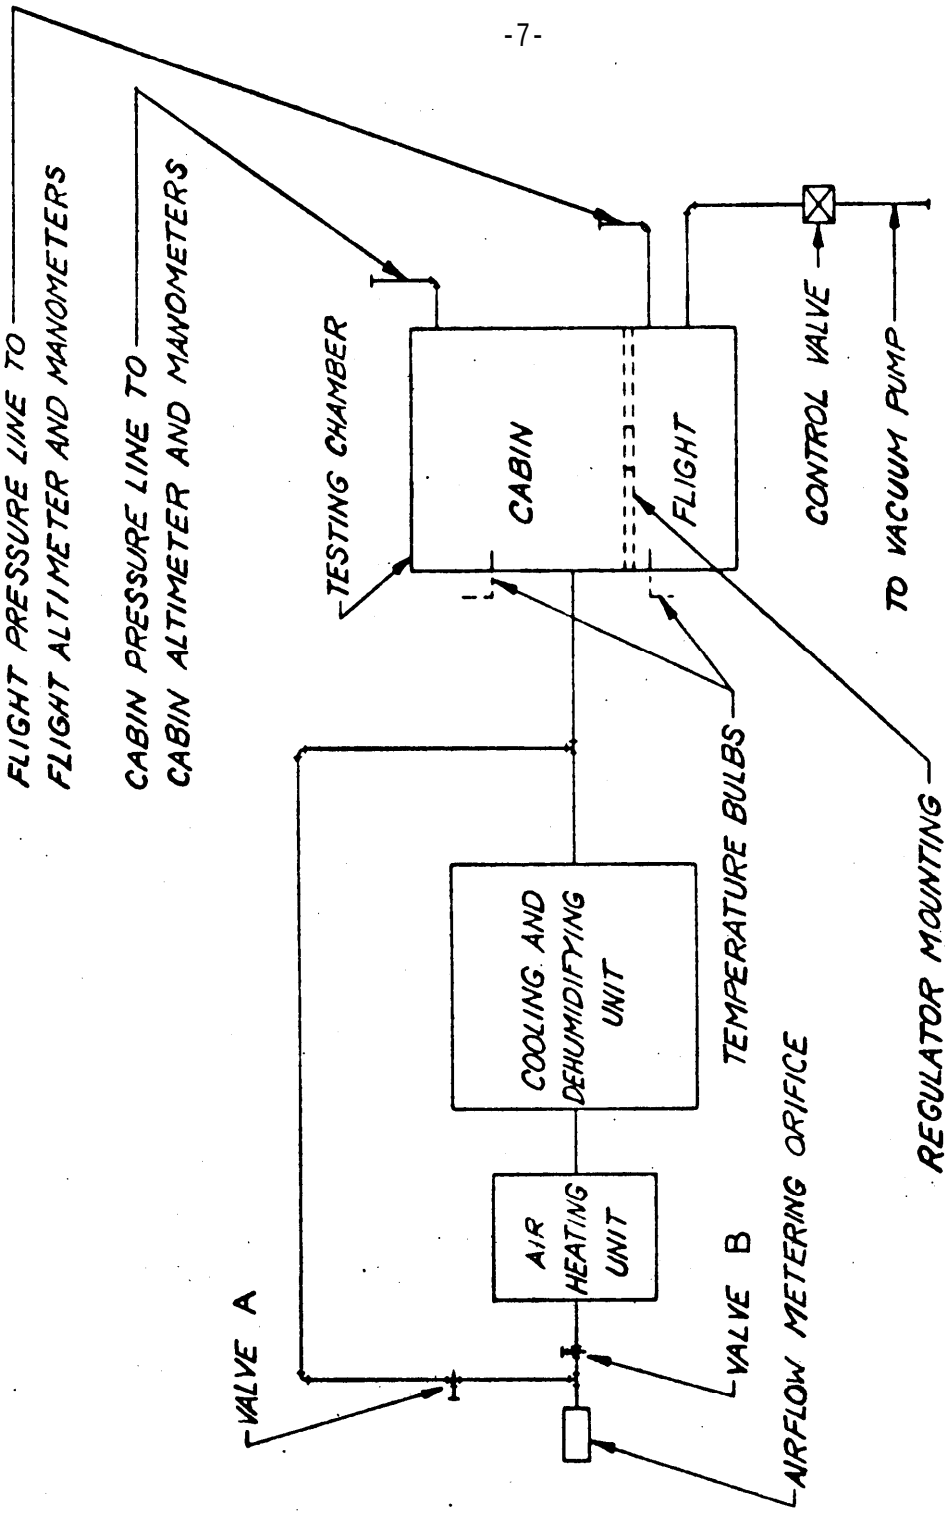


FIGURE 1. TEST SET UP NO. 1

NOTE:
IN NORMAL OPERATION VALVE A WILL BE OPEN. VALVE B WILL BE CLOSED.
FOR HIGH OR LOW TEMPERATURE OPERATION, CLOSE A AND OPEN B.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:08Z
Check the source to verify that this is the current version before use.

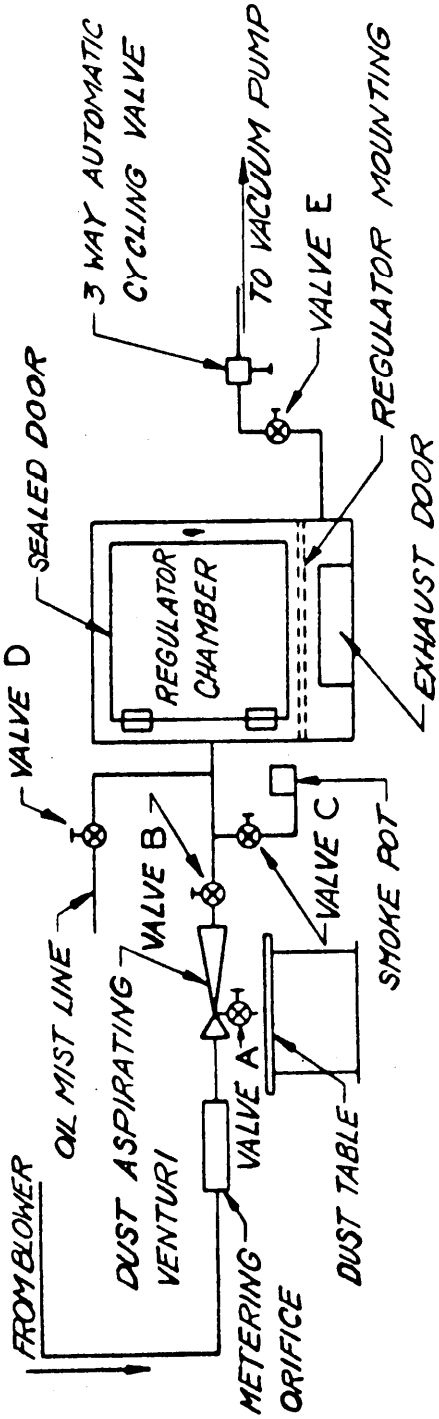

CONTAMINATED AIR TEST		ENDURANCE TEST
DUST AND OIL CONTAMINATION PROCEDURE	SMOKE CONTAMINATION PROCEDURE	CYCLING PROCEDURE
1. OPEN VALVES A, B, AND D. 2. CLOSE VALVES C AND E. 3. OPEN EXHAUST DOOR. 4. OPERATE WITH POSITIVE PRESSURE OF APPROX. 0.5 INCHES HG.	1. OPEN VALVES C AND E. 2. OPEN CYCLING VALVE. 3. CLOSE VALVES B AND D. 4. CLOSE EXHAUST DOOR.	1. OPEN VALVE E. 2. CLOSE VALVES B, C, AND D. 3. CLOSE EXHAUST DOOR. 4. ALLOW TO CYCLE AS SPECIFIED FROM SEA LEVEL TO 45,000 FT. TO SEA LEVEL AMBIENT ALTITUDE.

FIGURE 2. TEST SET UP NO. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

4.2.5.1 Dust contamination. - Dust contamination shall consist of injecting the following material commercially known as “140 mesh Silica Flour” into the airflow so that a concentration of 0.065 grams of dust per pound of air is produced:

(1) Fifty percent natural Arizona dust, AC Spark Plug Division No. 1543094, or equal.
(2) Twenty-five percent graded sharp sand passing through a 100-mesh screen and over 200 mesh.
(3) Twenty-five percent graded sharp sand passing through a 50-mesh screen and over 100 mesh.

4.2.5.2 Oil contamination. - Oil contamination shall consist of injecting oil conforming to Specification MIL-L-6052, Grade 1120 or MIL-L-7808, as applicable, into the airflow at the rate of 0.017 cc per pound of air, up to the capacity of the regulator.

4.2.5.3 Smoke contamination. - Smoke contamination shall consist of burning pipe tobacco at an average rate of 0.63 grams of tobacco per pound of air and causing the effluent smoke to pass through the regulator.

4.3 Qualification tests:

4.3.1 Prior qualification. - Unless otherwise specified by the procuring agency, regulators which have not previously passed a qualification test, or which have passed a qualification test and have been modified in any manner, shall satisfactorily pass a qualification test prior to the acceptance of any regulator.

4.3.2 Qualification test samples .- Qualification test samples shall consist of two regulators. Samples shall be appropriately identified with the manufacturer's own part number and any additional identification required by the authorizing letter.

4.3.2.1 The manufacturer shall furnish information on recommended calibration setup, with instructions therefor, to the procuring agency at the time of submission of the regulator for qualification tests.

4.3.3 The qualification tests shall consist of the following tests and those specified under inspection tests:

4.3.3.1 Endurance.- The regulator shall be placed in a cycling chamber of test setup No. 2 for 500 hours where the ambient altitude shall be alternately raised to the altitude specified in the detail specification and dropped to sea level completing at least 6 cycles per hour. Regulator with combat changeover mechanism shall concurrently complete at least 100 complete cycles of range change. Upon completion of the enduranoe run, the regulator shall be subjected to the sampling tests.

4.3.3.2 vibration. - The regulator shall be subjected to a vibration teat in accordance with Procedure I of Specification MIL-E-5272. Upon completion of the vibration test, the regulator shall be subjected to the sampling tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

4.3.3.3 Contaminated air:

4.3.3.3.1 Dust and oil contamination. - The regulator shall be mounted in test setup No. 2 and subjected to contamination by dust for a period of 24 hours and by oil for 1 hour in every 6 hours of the 24-hour dust contamination period. Cabin pressure shall be maintained at a level which will permit flaw of air at a value equivalent to rated regulator capacity.

4.3.3.3.2 Smoke contamination. - The regulator shall be mounted in test setup No. 2 and shall be subjected to contamination by smoke for 6 hours at 1 ambient altitude in each range of regulator operation while controlling cabin pressure. The flow of air shall be sufficient to burn tabacco at the specified rate.

4.3.3.3.3 Operation. - After contamination, the regulator shall be mounted in test setup No. 1 and shall be subjected to the sampling tests. Limit tolerances shall be increased 100 percent over limits specified herein for the applicable ranges.

4.3.3.3.4 Inspection. - After operation, the regulator shall be disassembled to determine the extent of contamination.

4.3.3.4 Environmental. - The regulator shall be subjected to the following tests conducted in accordance with the specified procedures of Specification MIL-E-5272. After exposure, the regulator shall be inspected and no harmful or unduo corrosion shall result.

4.3.3.4.1 Salt spray. - The duration of the test period shall be 50 hours. The regulator shall than be subjected to the sampling tests. Limit tolerances shall be increased 100 percent over limits specified herein for the applicable ranges.

4.3.3.4.2 Humidity. - Procedure I.

4.3.3.4.3 Fungus resistance. - Procedure I. After being exposed to these conditions, the regulator shall be examined for harmful fungus growth, which if present, shall constitute failure under this test.

4.3.3.4.4 Explosion-proof. - Procedure I. This test shall be conducted on regulators with electrical mechanisms. The electrical maechanism shall not cause an explosion of the combustible mixture; or if an explosion does occur, it shall not cause any explosion or fire outside of the equipment.

4.3.3.5 Electric motors. - When direct current electric motors are incorporated in the combat changeover mechanism, the motors shall be subjected to and shall meet the requirements of Specification MIL-M-8609.

4.4 Inspection tests:

4.4.1 Individual tests. - Each regulator shall be subjected to the following tests:

4.4.1.1 Examination of product. - Each regulator shall be inspected to determine compliance with this specification with respect to material, workmanship, design, and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

4.4.1.2 Bench. - A bench test for checking the mechanical functioning of the regulator in all ranges shall be devised by the manufacturer. This can be done by the use of light vacuum lines connecting to the pressure responsive elements of the regulator. Performance can be calculated from the measured degree of regulator opening. A complete outline of the bench test shall be submitted to the procuring agency for approval.

4.4.2 Sampling tests. - One regulator shall be selected at random from every one hundred or fraction thereof produced and subjected to the following tests:

4.4.2.1 When sampling tests are specified on a number of items that are selected from a production run and one or more of this number fails to meet the specified tests, acceptance of all items still on hand and subsequent production will be withheld until the extent and cause of failure is determined. For operational reasons, individual tests may be continued pending investi-ation of a sampling test failure. However, final acceptance of the items on hand and subsequent production Is contingent upon the inspector's decision regarding the over-all conformance of the product to specification requirements. When corrective action has been accomplished, all necessary tests shall be repeated. If investigation indicates that the defects may exist in items preciously accepted, full particulars concerning the defects, including recommendation for correction, will be furnished to the contracting officer.

4.4.2.2 Unpressurized range:

4.4.2.2.1 Ambient altitude stabilized .- Ambient altitude shall be stabilized at sea level and at 2000 feet below the isobaric range. Flow of cabin pressurizing air shall be varied to give values of 10, 20, 50, 70, and 100 percent of rated regulator capacity. Differential pressure between cabin and ambient shall be recorded for each flow and altitude.

4.4.2.2.2 Test requirement.- Pressure differential shall not exceed 0.5 inches Hg for any flow up to and including rated regulator capacity in simulated stable flight.

4.4.2.3 Isobaric range:

4.4.2.3.1 Ambient altitude stabilized .- Ambient altitude shall be stabi-lized at selected altitudes in the isobaric range. A minimum of 2 altitudes shall be used with a minimum spread of 5000 feet between altitudes chosen or representing the limits of the isobaric range. Flow of cabin pressurizing air shall be varied to give 10, 20, 50, 70, and 100 percent of rated regulator capacity. Cabin altitude shall be recorded for each flow and ambient altitude.

4.4.2.3.2 Simulated climb. - A constant rate of climb as specified in the detail specification shall be simulated through the isobaric range for each specified air flow. Instantaneous cabin altitude readings shall be taken at approximately 1000-foot increments of ambient altitude.

4.4.2.3.3 Test requirement. - For any of the above flight altitudes and air flows, the cabin pressure shall be maintained constant at the level. specified in the detail specification ±0.20 inch Hg.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:08Z
Check the source to verify that this is the current version before use.

4.4.2.4.1 Ambient altitude stabilized. - Ambient altitude shall be stabilized at 3000-foot intervals throughout the constant pressure differential range, or throughout the ranges in the case of multirange regulators. Air flows shall be varied to give 10, 20, 5O, 70, and 100 percent of rated regulator capacity. Pressure differential shall be recorded for each flow and ambient altitude.

4.4.2.4.2 Simulated climb. - A constant rate of climb as specified in the detail specification shall be simulated for each specified air flow, Instantaneous cabin altitude readings shall be taken at approximately 1000-foot increments of ambient altitude throughout the constant pressure differential range.

4.4.2.4.3 Test requirements. Cabin pressure in simulated stabilized flight shall be maintained at a constant differential relative to ambient pressure. The pressure differential shall be the differential specified in the detail specification ±0.20 inch Hg. In simulated climing flight a curve shall be drawn representing the mean of readings taken with varying air flows. Individual curves for each specified air flow shall be consistent with this mean curve within ±0.20 inch Hg, and the mean curve shall not vary from specified differential pressure by more than ±0.20 inch Hg.

4.4.2.5 Constant ratio range.- This test shall be applicable to regulators incorporating a range in which control is effected on a constant relative gas expansion curve.

4.4.2.5.1 Ambient altitude stabilized.- Ambient altitude shall be stabilized at 3000-foot intervals throughout the relative gas expansion range and flow of cabin pressurizing air shall be varied to give 10, 20, 50, 70, and 100 percent of rated regulator capacity. Cabin altitude pressure reading shall be taken for each air flow and ambient altitude.

4.4.2.5.2 Test requirement. - Cabin altitude pressure shall be maintained at the values computed for the specified relative gas expansion curve ±0.20 Hg. The relative gas expansion curve shall be computed from the following equation:

$$\text{Specified RGE} = \frac{P_c - 1185}{P_a - 1.85}$$

Where RGE Relative gas expansion
P_c Cabin pressure in inches Hg abs
P_a Ambient pressure in inches Hg abs

4.4.2.6 Initial opening pressure differential.- Initial opening pressure differential shall be checked in the following manner:

(1) The initial flow of air shall be zero. Cabin altitude shall be stabilized at sea level.
(2) Ambient altitude shall be increased slowly.
(3) The pressure differential shall be read in inches of water at the first indication of air flow at the inflow air orifice manometer.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:08Z
Check the source to verify that this is the current version before use.

4.4.2.6.1 Maximum allowable cracking pressure differential shall be 4 inches of water.

4.4.2.7 Combat changeover mechanism:

4.11.2.7.1. Normal to combat range change. - The time interval of normal to combat range change shall be such as to give a rate of cabin pressure decrease of no more than 2 and no less than 0.5 inches Hg per second.

4.4.2.7.2 Combat to normal range change. - The time interval of combat to normal range change shall be such as to give no more than 2 inches Hg per minute rate of cabin pressure increase.

4.4.2.8 Shut-off leakage .- The regulator shall be installed in a chamber while in the shut-off or inoperative condition. The maximum differential pressure for the regulator, as specified in the detail specification, shall be imposed across the valve. The air flow through the outflow valve shall be suitably measured.

4.4.2.8.1 Test requirement. - The maximum allowable leakage through the outflow valve shall be as specified in the detail specification.

4.5 Special test. - One regulator representative of every two hundred or fraction thereof on the order shall be subjected to the following tests:

4.5.1 Low temperature.- The regulator shall be mounted in test setup No. 1 and subjected to an ambient altitude temperature of -54° ±2°C for a period of at least 24 hours before operation. After this period and while still at this temparature, the regulator shall be subjected to the sampling tests. Limit tolerances shall be increased 100 percent over limits specified herein for the applicable ranges.

14.5.2 High temperature.- The regulator shall be mounted in test setup No. 1 and subjected to an ambient altitude temporature of 71° ± 2°C for a period of at least 24 hours before operation. After this period and while still at this temperature, the regulator shall be subjected to the sampling tests. Limit tolerances shall be increased 100 percent over limits specified herein for the applicable ranges.

4.6 All parts, specimens, or assemblies destroyed in making tests required by this specification, to determine compliance with the specification, shall be in addition to the quantity specified in the contract or purchase order and shall be furnished without increasing the coat of the contract or order.

5. PREPARATION FOR DELIVERY

5.1 General. - The packaging, packing, and marking requirements specified herein apply to direct purchase by or direct shipments to the Government.

5.2 Packaging and packing.- Each regulator shall be packaged and packed for shipment in accordance with Specification MIL-P-5633.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:08Z
Check the source to verify that this is the current version before use.

5.3 Marking of shipments. - Interior packages and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129. The nonenclature shall be as specified in the detail specification.

6. NOTES

6.1 Use. - The regulator covered by this specification is intended for use in pressurized cabins of aircraft for controlling cabin pressure automatically.

6.2 Qualification tests. - In the procurement of products requiring qualification, the right is reserved to reject bids on products that have not been subjected to the required tests and found satisfactory for inclusion on a Qualified Products List. The attention of suppliers is called to this requirement, and manufacturers are urged to communicate with the Wright Air Development Center and arrange to have the products that they propose to offer to the Air Force tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information portaining to qualification of products may be obtained from the Commandor, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, Attention: WCIE.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any mannor licensing the holdor or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:08Z
Check the source to verify that this is the current version before use.