
FED. SUP CLASS
2540

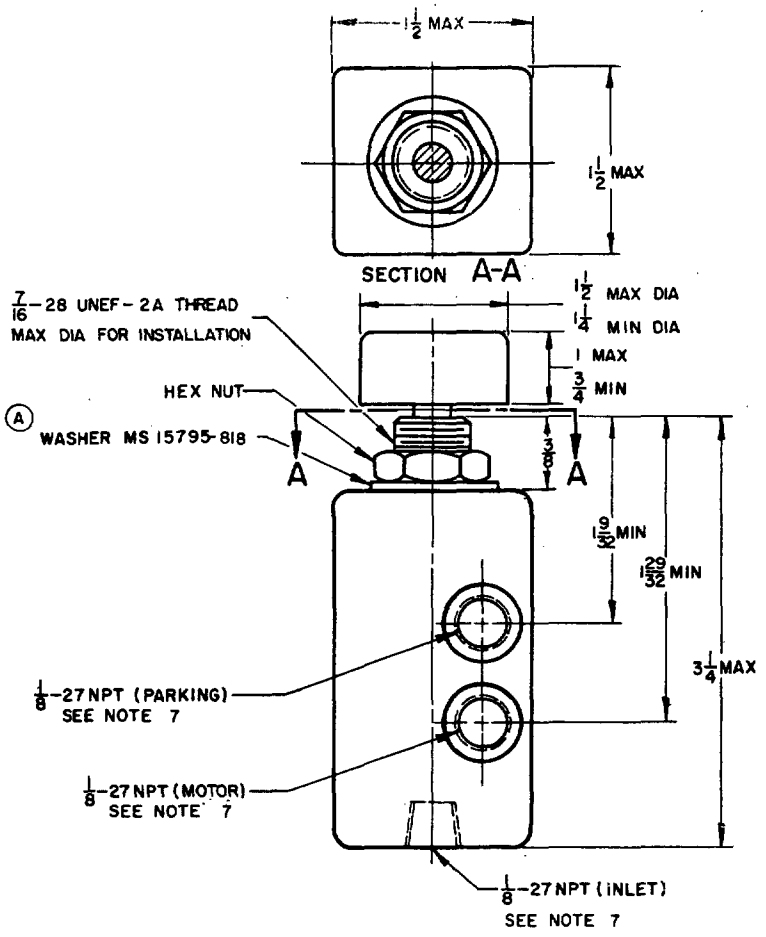

NOTES:

1. TYPE II, OF PROCUREMENT SPECIFICATION.
2. MATERIAL: ALUMINUM PER QQ-A-591. OPTIONAL: BRASS PER MIL-B-15894 OR ZINC ALLOY DIE CASTING PER QQ-Z-363.
3. CONSTRUCTION AND MATERIAL OF CONTROL KNOB OPTIONAL, BUT SHALL BE ADEQUATE FOR INTENDED USE.
4. CONTROL KNOB SHALL BE INSCRIBED TO SPECIFY ITS USE AND INDICATE DIRECTION OF OPERATION.
5. CONSTRUCTION OF BODY OPTIONAL (ROUND, ELLIPSOIDAL, ETC.) WITHIN DIMENSIONS GIVEN.
6. LOCATION OF INLET PORT OPTIONAL IN END OF BODY INDICATED.
7. PARKING, MOTOR, AND INLET PORTS SHALL BE IDENTIFIED BY STAMPING, CASTING, OR MOLDING.
8. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H28.
9. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 ON FRACTIONS.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
11. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
12. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
13. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

MS PART NO.
MS 53018 -1

APPROVED 3 JULY 1962 REVISED (A) 9 JULY 1968

USER ACTIVITY: ARMY-ME

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust AF -84	TITLE VALVE, PRESSURE REGULATING, WINDSHIELD WIPER AIR MOTOR CONTROL	MILITARY STANDARD MS53018
PROCUREMENT SPECIFICATION MIL-M-12185	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.