
FED. SUP CLASS
2530

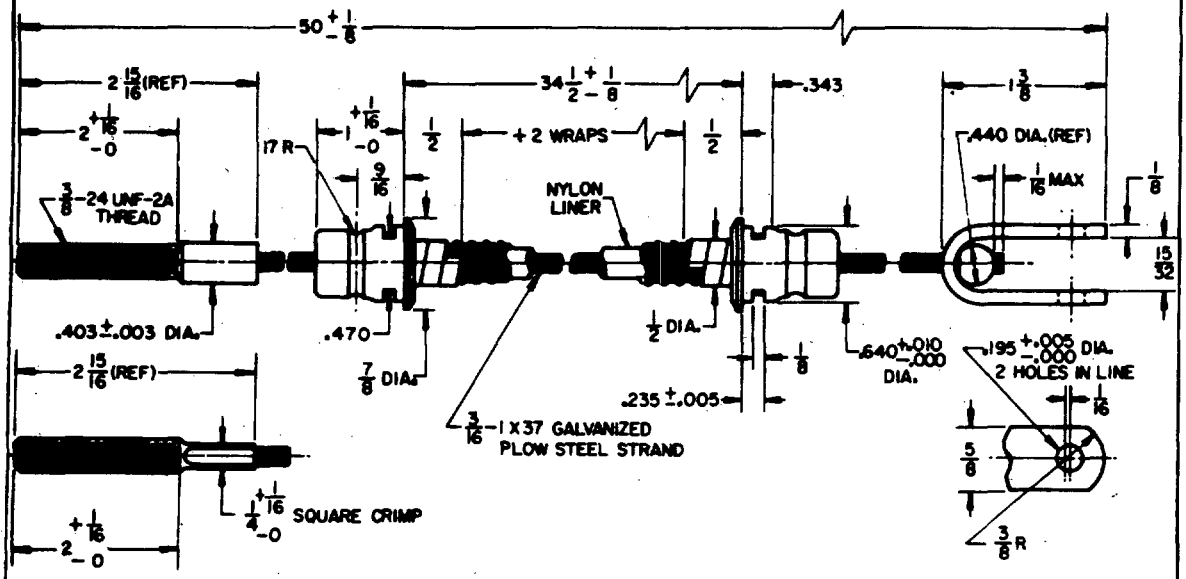

OPTIONAL DESIGN

NOTES:

1. THE CABLE ASSEMBLY SHALL BE CAPABLE OF WITHSTANDING A LOAD OF 2000 LBS. SUSTAINED FOR A PERIOD OF TWO HOURS WITH A MAXIMUM PERMISSIBLE SLIPPAGE OF EACH END FITTING WITH RESPECT TO THE CABLE OF FIFTEEN THOUSANDTHS (.015) OF AN INCH.
2. EACH CABLE ASSEMBLY TO BE PRE-STRETCHED UNDER A LOAD OF 1000 LBS.
3. CONDUIT SHALL BE PACKED AT ASSEMBLY WITH GREASE PER SPECIFICATION MIL-G-3278.
4. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.
5. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: ± 1/32 ON FRACTIONS, ± .010 ON DECIMALS.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.
9. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURERS IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 9 AUG 1963 REVISED (A) 16 DEC 1964

(A) ENTIRE STANDARD REVISED

MS PART NO	FORMER PART NO
MS 53061 -1	8675895

P.A. MO (ATAC)
Other Cust

TITLE
CABLE AND CONDUIT ASSEMBLY, PARKING BRAKE — STRAIGHT TYPE, EYE AND THREADED FITTINGS

MILITARY STANDARD
MS 53061 (MO)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES

SHEET 1 OF 1

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities may use it to employ this standard where suitable.

DD FORM SEP 87 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.