FED. SUP CLASS
2640

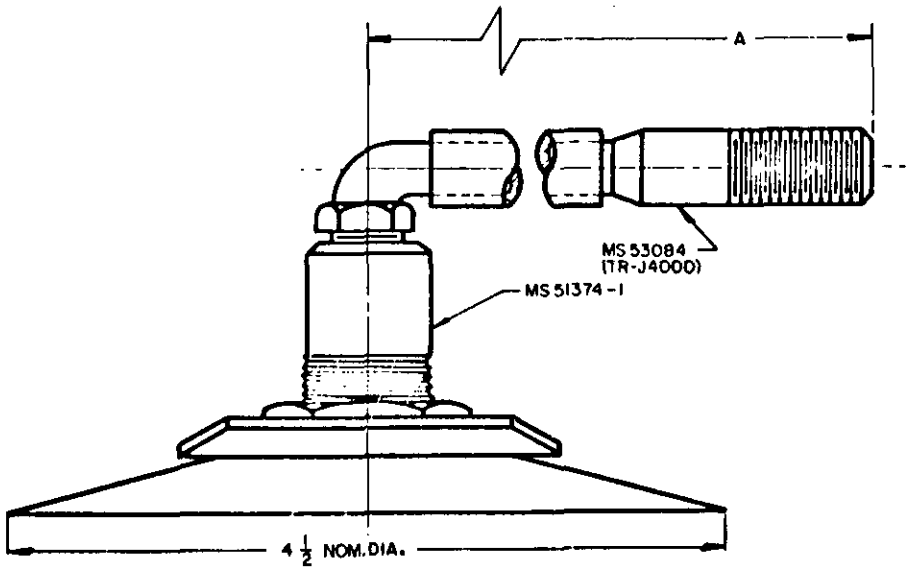

MS PART NO.	DIMENSION "A"
MS 53082-1	2-1/2
MS 53082-2	4-1/2
MS 53082-3	6
MS 53082-4	7-1/2
MS 53082-5	27-1/2
MS 53082-6	29-1/2

(C) CANCELLED AFTER 15 FEB 1977

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEARBOOK PER ZZ-V-25

TYPE 1, CLASS 11 OF PROCUREMENT SPECIFICATION

NOTES:

1. COMPLETE VALVE ASSEMBLY SHALL CONSIST OF: VALVE SPUD MS 51374-1, AND VALVE STEM MS 53084.
2. BASE CONFIGURATION OPTIONAL PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS 4-1/2 INCHES NOMINAL DIAMETER.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 53082-1.
5. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.

APPROVED 26 OCT 1964 REVISED (A) 11 MAY 1967 (B) 12 AUGUST 1971 (C) 15 FEB 1977

USER ACTIVITIES: ARMY-ME, MI; NAVY-MC

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust Navy- YD AF- 99 PROCUREMENT SPECIFICATION ZZ-V-25	TITLE VALVE ASSEMBLY, PNEUMATIC TIRE: TUBE TYPE, LARGE BORE, BENT, VEHICULAR SUPERSEDES:	MILITARY STANDARD MS53082 SHEET 1 OF 1

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-157/1556

2640-0170
55

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.