Ⓑ CANCELED AFTER _____
USE MIL-T-27/103

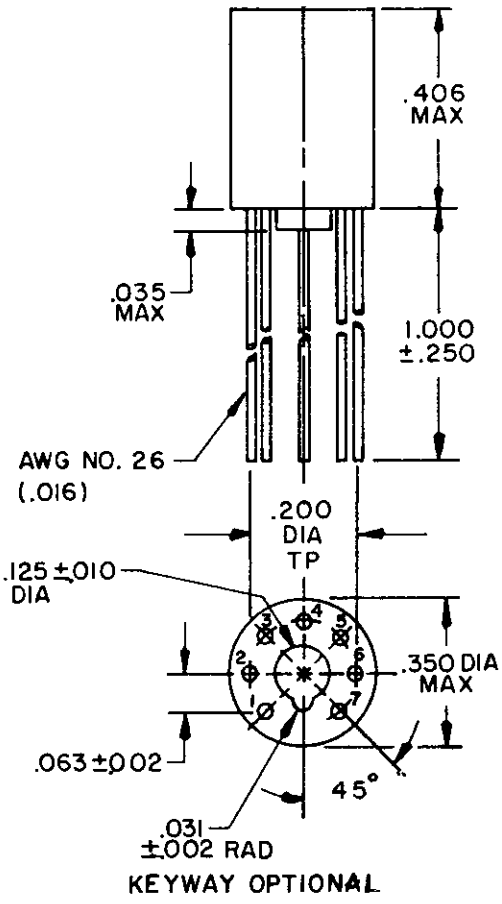

CIRCUIT DIAGRAM AND MARKING

FREQUENCY RANGE 400 Hz TO 100 kHz
POWER LEVEL: 500 mw

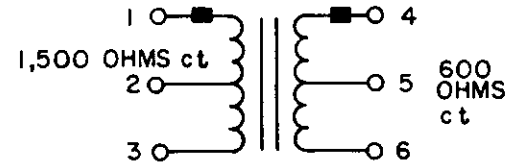

ALTITUDE 150,000 FT
WORKING VOLTAGE 50V MAX
SCHEMATIC A

FREQUENCY RANGE 400 Hz TO 100 kHz
POWER LEVEL: 100 mw



(SEE DASH 2 OR DASH 3 FOR SPECIFIC IMPEDANCE RATING)
ALTITUDE 150,000 FT
WORKING VOLTAGE 50V MAX

SCHEMATIC B

INCHES	MM	INCHES	MM
.002	.05	.125	3.18
.005	.13	.200	5.08
.010	.25	.250	6.35
.016	.41	.350	8.89
.031	.79	.406	10.31
.035	.89	1.000	25.40
.063	1.60		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The number of terminal shall be as shown in schematic "A" and "B". (Schematic "A" pins 7 and 8 omitted, schematic "B" pin 8 omitted).
4. Terminals are spaced the same as "TO-76" transistors and micrologic elements.
5. Referenced document shall be of the issue in effect on date of invitation for bids.
6. This standard takes precedence over document referenced herein.
7. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
8. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

Ⓐ denotes changes

APPROVED 6 Feb 73
REVISED Ⓐ 5 OCT 77 Ⓑ 22 June 1979

User activities: Army MI, Navy MC, CG, Air Force 19
Reviewer activities: Army AR, Navy SH, Air Force 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Army-ER	International interest	TITLE	MILITARY STANDARD
Other Cust AF-85		TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21ZZ	MS 53227
Navy - EC			
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 1 OF 5

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:22Z
Check the source to verify that this is the current version before use.