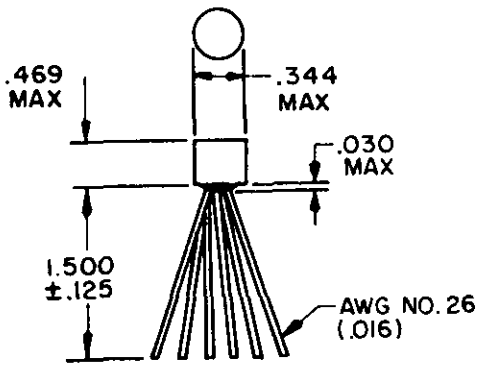

CIRCUIT DIAGRAM AND MARKING

FREQUENCY RANGE: 300 Hz TO 20 kHz
POWER LEVEL: 100 mw

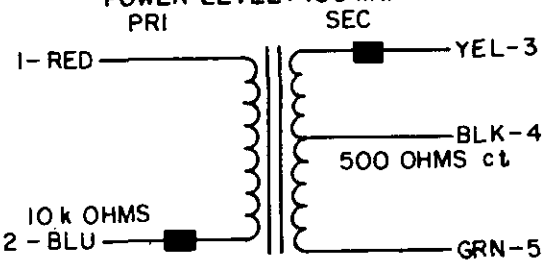

ALTITUDE: 150,000 FT
WORKING VOLTAGE: 50V MAX

SCHEMATIC A

FREQUENCY RANGE: 300 Hz TO 20kHz
POWER LEVEL: 100m w

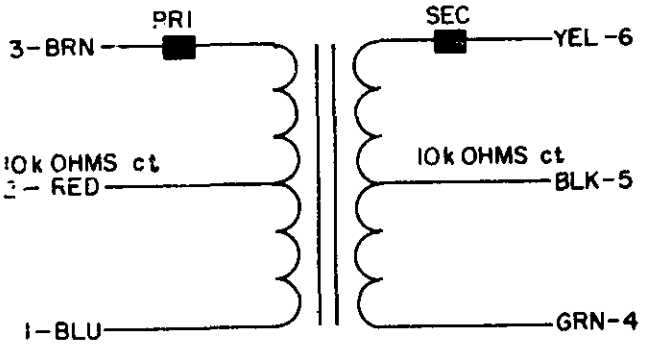

ALTITUDE: 150,000 FT
WORKING VOLTAGE: 50V MAX

SCHEMATIC B

INCHES	MM
.016	.41
.030	.76
.125	3.18
.344	8.74
.469	11.91
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in schematic "A or B".
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

(B) CANCELED AFTER _____
USE MIL-T-27/172

(B) DENOTES CHANGE

P.A. Army-ER Other Cust AF-85 Navy - EC	International interest	TITLE TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE TYPE TF5R21ZZ	MILITARY STANDARD MS 53228
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 1 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5950-0564-4

☆ U.S. GOVERNMENT PRINTING OFFICE: 1979—603-022/3160

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

APPROVED 6 FEB 73 REVISED (A) 4 April 1977 (B) 22 June 1979

User activities: Army MI Navy MC, CG Air Force 19
Reviewer activities: Army MU Navy SH Air Force 11, 99, 17

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.