INCH-POUND
MIL-DTL-16878/16D
w/AMENDMENT 1
12 January 2016
SUPERSEDING
MIL-DTL-16878/16D
25 April 2011

DETAIL SPECIFICATION SHEET

WIRE, ELECTRICAL, CROSSLINKED, MODIFIED POLYETHYLENE (XLPE) INSULATED, 125 DEGREES C, 3000 VOLTS

Inactive for new design after 08 December 2014. For new design, use National Electrical Manufacturers Association (NEMA) HP 5.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16878.

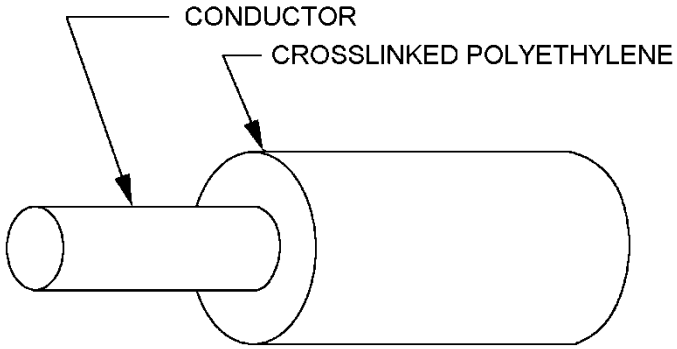


FIGURE 1. Wire configuration.

AMSC N/A

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:29Z
Check the source to verify that this is the current version before use.

TABLE I. Wire configuration and dimensions.

PIN 1/	Wire size	Stranding	Conductor		Conductor diameter (nominal) (inch)	Finished wire diameter (inch)	
			Material	Coating		Min	Max
M16878/16BDA*	26	1 X 26	Copper	Tin	.0159	.067	.082
M16878/16BDB*	26	7 X 34	Copper	Tin	.0190	.070	.085
M16878/16BDE*	26	19 X 38	Copper	Tin	.0200	.070	.085
M16878/16BEA*	24	1 X 24	Copper	Tin	.0201	.071	.086
M16878/16BEB*	24	7 X 32	Copper	Tin	.0240	.075	.090
M16878/16BEE*	24	19 X 36	Copper	Tin	.0250	.075	.090
M16878/16BFA*	22	1 X 22	Copper	Tin	.0254	.076	.091
M16878/16BFB*	22	7 X 30	Copper	Tin	.0300	.081	.098
M16878/16BFE*	22	19 X 34	Copper	Tin	.0320	.081	.098
M16878/16BGA*	20	1 X 20	Copper	Tin	.0320	.083	.098
M16878/16BGB*	20	7 X 28	Copper	Tin	.0380	.089	.105
M16878/16BGE*	20	19 X 32	Copper	Tin	.0400	.089	.105
M16878/16BHA*	18	1 X 18	Copper	Tin	.0403	.091	.106
M16878/16BHB*	18	7 X 26	Copper	Tin	.0480	.099	.114
M16878/16BHE*	18	19 X 30	Copper	Tin	.0470	.099	.114
M16878/16BJA*	16	1 X 16	Copper	Tin	.0508	.102	.117
M16878/16BJE*	16	19 X 29	Copper	Tin	.0570	.108	.123
M16878/16BJF*	16	26 X 30	Copper	Tin	.0600	.111	.125
M16878/16BKA*	14	1 X 14	Copper	Tin	.0641	.115	.130
M16878/16BKE*	14	19 X 27	Copper	Tin	.0720	.123	.138
M16878/16BKH*	14	41 X 30	Copper	Tin	.0760	.127	.142
M16878/16BLE*	12	19 X 25	Copper	Tin	.0920	.156	.171
M16878/16BLG*	12	37 X 28	Copper	Tin	.0890	.153	.168
M16878/16BLJ*	12	65 X 30	Copper	Tin	.0930	.157	.172
M16878/16BMG	10	37 X 26	Copper	Tin	.1110	.174	.189
M16878/16BNL	8	133 X 29	Copper	Tin	.1670	.239	.254
M16878/16BNM	8	168 X 30	Copper	Tin	.1690	.239	.254
M16878/16BPL	6	133 X 27	Copper	Tin	.2100	.283	.298
M16878/16BRL	4	133 X 25	Copper	Tin	.2680	.346	.366
M16878/16BSL	2	133 X 23	Copper	Tin	.3550	.415	.435
M16878/16BSP	2	665 X 30	Copper	Tin	.3420	.415	.435
M16878/16BTN	1	259 X 25	Copper	Tin	.3780	.468	.488
M16878/16BTR	1	817 X 30	Copper	Tin	.3820	.468	.488
M16878/16BUN	0	259 X 24	Copper	Tin	.4240	.518	.538
M16878/16BUS	0	1045 X 30	Copper	Tin	.4310	.518	.538
M16878/16BWT	00	1330 X 30	Copper	Tin	.4750	.575	.599
M16878/16BYV	000	1672 X 30	Copper	Tin	.5350	.657	.681
M16878/16BZW	0000	2109 X 30	Copper	Tin	.6000	.790	.733

1/ PIN stands for Part or Identifying Number (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:29Z
Check the source to verify that this is the current version before use.

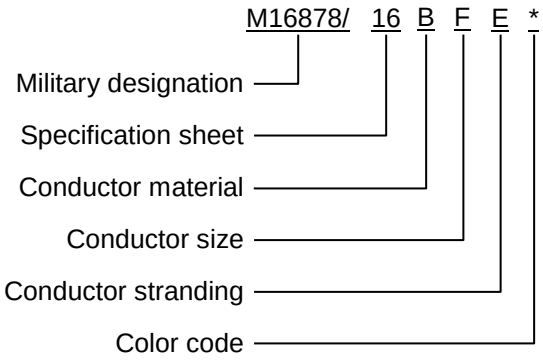


FIGURE 2. Example of PIN (see MIL-DTL-16878).

Configuration and dimensions:	See figure 1 and table I
Operating voltage:	Up to 3000 volts
Operating temperature:	Up to 125 °C
Insulation:	Crosslinked polyethylene
Spark test voltage:	8.0 kV
Impulse dielectric test voltage:	12.0 kV, or 8.5 kV using the 3.0 kHz spark test
Dielectric withstanding voltage:	6.0 kV
Partial discharge voltage:	Required
Insulation resistance:	$IR = K \log_{10} D/d$ Where: IR = Minimum insulation resistance in megohms-1000 feet at 20 degrees C K = 10,000 D = Maximum average diameter of finished wire d = Conductor diameter
Cold bend:	Condition 4 hours at -55±1 degrees C (see table II)

TABLE II. Cold bend mandrel sizes.

Wire size	Cold bend mandrel diameter (inches, maximum)
26 through 22	2
20 through 14	3
12, 10	4.5
8	6
6, 4	10
2, 1, 0	18
00, 000, 0000	20

Surface resistance:	Not required
Heat resistance:	Condition at 150 degrees C
Heat aging:	25 percent change (maximum) in 96 hours at 135 degrees C
Insulation tensile strength:	1800 pounds force per square inch (minimum)
Insulation elongation:	100 percent (minimum)
Partial discharge test:	Required
Marking and stripe durability:	Not required

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:29Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced document. This document references MIL-DTL-16878.

CONCLUDING MATERIAL

Custodians:
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2015-042)

Review activity:
Navy – AS, 99

Note: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the Assist Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:29Z
Check the source to verify that this is the current version before use.