NOTICE OF INACTIVE
FOR NEW DESIGN

INCH-POUND

MIL-DTL-16878/36A
NOTICE 3
8 December 2014
SUPERSEDING
NOTICE 2
12 September 2011

DETAIL SPECIFICATION SHEET

WIRE, ELECTRICAL, LOW SMOKE, CROSSLINKED POLYOLEFIN (XLPO) INSULATED, 105°C, 600 VOLTS

MIL-DTL-16878/36A is inactive for new design and is no longer used, except for replacement purposes. New design acquisitions for this material should refer to National Electrical Manufacturers Association (NEMA) HP 8, Electrical and Electronic Crosslinked, Modified Low-Smoke Polyolefin (XLPO) Insulated Hook-Up Wire, Type LS (rated 105°C; 600 V), ZHDM (rated 90°C; 600 V), ZHDH (rated 90°C; 600 V), ZH (rated 125°C; 600 V), and ZHX (rated 125°C; 1000 V).

CAUTION: The supersession information is valid as of the date of this notice and may be superseded by subsequent revisions of the superseding document.

(Copies of these documents are available online at http://www.nema.org or from the National Electrical Manufacturer's Association, 1300 North 17th Street, Suite 1847, Rosslyn VA 22209.)

The following Part Identification Number (PIN) is the former PIN that has been superseded by NEMA HP 8. (See MIL-DTL-16878 for a detailed explanation of the PIN digits).

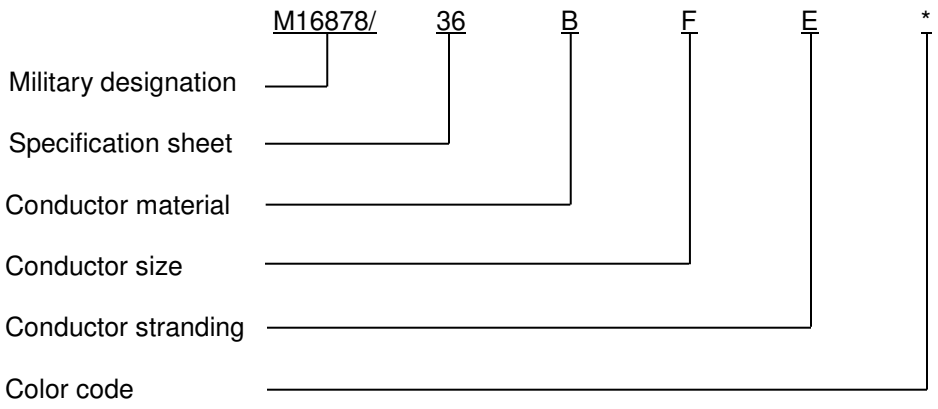

FIGURE 1. Example of former PIN (see MIL-DTL-16878G).

AMSC N/A

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:33Z
Check the source to verify that this is the current version before use.

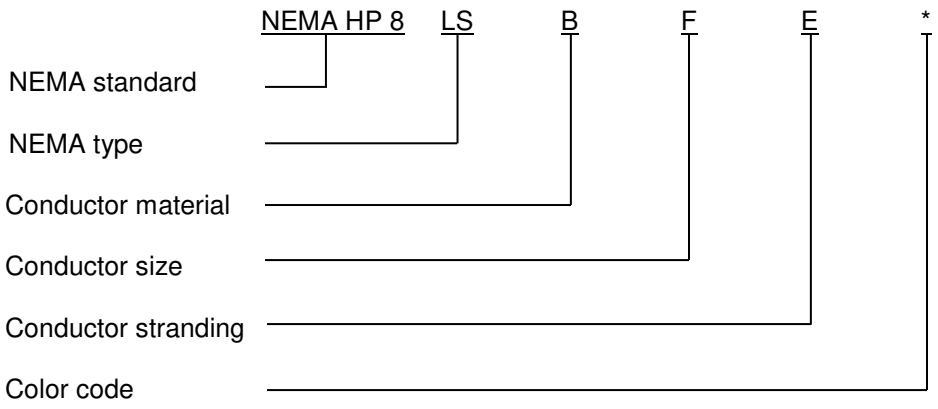

FIGURE 2. Example of replacement PIN (see NEMA HP 8).

CONCLUDING MATERIAL

Custodians:
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2014-057)

Review activity:
Navy - AS
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:33Z
Check the source to verify that this is the current version before use.