[METRIC]
A-A-55519/1A
February 26, 1999
SUPERSEDING
A-A-55519/1
November 4, 1996

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, INCLOSED LINK, SUBMINIATURE, SURFACE MOUNT (SM), VERY FAST ACTING, WITH END CAPS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a very fast acting, SM, inclosed link fuse with end caps. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

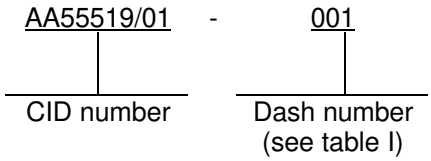

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein (see figure 1).

3.2 Electrical specification.

3.2.1 Voltage rating. The voltage rating for AA55519/01-01 through AA55519/01-16 fuses shall be 125 V ac and 125 V dc maximum. The voltage rating for AA55519/01-17 and AA55519/01-18 fuses shall be 65 V ac and 65 V dc.

3.2.2 Interrupting ratings. The interrupting ratings shall be as indicated in table II.

3.2.3 Opening time characteristics. The opening time characteristics shall be as indicated in table III.

3.3 Environmental specifications. Fuses supplied to this CID shall be subject to the following tests and there shall be no electrical or mechanical damage to the fuse.

3.3.1 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.3.2 Shock. Fuses shall meet shock requirements in accordance with method 213, MIL-STD-202, test condition I (100 g's peak for 6 milliseconds).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any pertinent data which may improve this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, 3990 East Broad Street, Columbus, OH 43213-1199, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

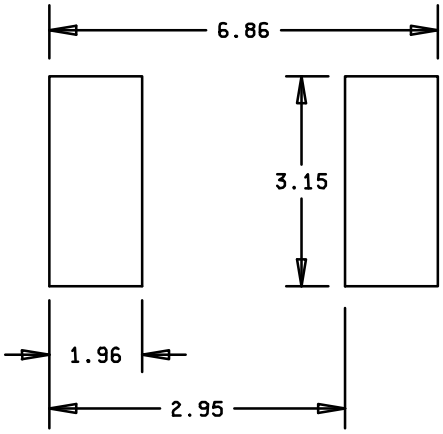

RECOMMENDED PAD LAYOUT

mm	Inches
1.45	.057
1.96	.077
2.69	.105
3.15	.124
6.10	.240
6.86	.270

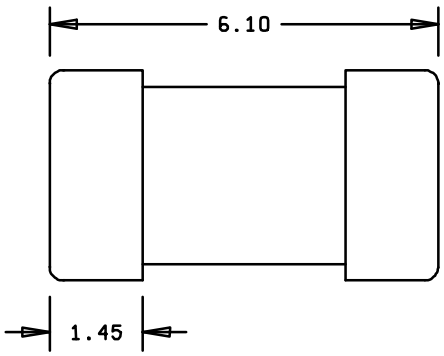



NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.15 mm (0.006 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics

CID dash number AA55519/01-	Ampere rating	Nominal resistance cold ohms	Nominal melting I^2t A^2 second
001	.062	5.50	0.00019
002	.125	2.95	0.00286
003	.250	1.05	0.01126
004	.375	0.610	0.0425
005	.5	0.420	0.0795
006	.75	0.245	0.185
007	1.0	0.143	0.459
008	1.5	0.0630	0.853
009	2.0	0.0367	0.53
010	2.5	0.0286	1.029
011	3.0	0.0227	1.65
012	3.5	0.0200	2.469
013	4.0	0.0160	3.152
014	5.0	0.0125	5.566
015	7.0	0.0090	10.32
016	10.0	0.0056	26.46
017	12.0	0.0049	47.97
018	15.0	0.0037	97.82

TABLE II. Interrupting ratings.

Ampere (A) range	Interrupting rating
.0625A – 8A	50 ampere at 125 V ac/dc
12A - 15A	50 ampere at 65 V ac/dc
10A	50 ampere at 125 V dc 35 ampere at 125 V ac

3.3.3 Vibration. Fuses shall meet vibration requirements in accordance with method 201, MIL-STD-202, (10 Hz to 55 Hz, 1.52 mm (.060 inch) maximum total excursion).

3.3.4 Insulation resistance (after opening). The insulation resistance after opening shall be 10,000 ohms minimum at 100 volts in accordance with method 302, MIL-STD-202, test condition A.

3.3.5 Resistance to soldering heat. Fuses shall meet resistance to soldering heat requirements in accordance with method 210, MIL-STD-202, test condition B (10 seconds at 260°C).

3.3.6 Thermal shock. Fuses shall meet thermal shock requirements in accordance with method 107, MIL-STD-202, test condition B (-65°C to +125°C).

3.3.7 Moisture resistance. Fuses shall meet moisture resistance requirements in accordance with method 106, MIL-STD-202, with the exception of no load voltage during this test and step 7 shall not be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

3.4 Physical specifications.

3.4.1 Materials. Fuses shall have a ceramic body with tin-lead alloy plated brass caps.

3.4.2 Soldering parameters. Fuses shall be able to withstand, without electrical or mechanical damage to the fuse, a wave solder of +260°C (+500°F) for 10 seconds maximum, and an infrared solder of +260°C (+500°F) for 30 seconds maximum.

3.4.3 Solderability. Fuses shall meet solderability requirements in accordance with method 208 of MIL-STD-202.

3.5 Marking. Fuses supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

TABLE III. Rating versus opening time.

Ampere rating	Percent of ampere rating	Opening time
.0625A - 15A	100 percent	4 hours, minimum
.0625A - 10A	200 percent	5 seconds, maximum
12A - 15A	200 percent	20 seconds, maximum

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID sheet.

5. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55519.

6. PACKAGING. Packaging shall be as specified in A-A55519. In addition, inclosed link fuses may be supplied individually or in a quantity of 1,000 on a 12 mm (.472 inches) wide tape reel in accordance with EIA 481.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuses to DSCC under the Military Parts control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Department of Defense Standards

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.

(Copies of federal specifications and standards are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Commercial Item Description

A-A-55519 - Fuse, Cartridge, Surface Mount (SM), General Requirements for.

(Copies of federal specifications and standards are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

Other Publications

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA 481 - Taping of Surface Mount Components for Automatic Placement.

(Applications for copies should be addressed to the Electronics Industry Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.4 Ordering data. Ordering data shall be as specified in A-A-55519.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (847) 824-0400

7.6 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE IV. P/N supersession data.

Dash number (see table I) AA55519/01-	MFGR's CAGE	MFGR's P/N 1/	Dash number (see table I) AA55519/01-	MFGR's CAGE	MFGR's P/N 1/
001	75915	451.062	010	75915	45102.5
002	75915	451.125	011	75915	451003
003	75915	451.250	012	75915	45103.5
004	75915	451.375	013	75915	451004
005	75915	451.500	014	75915	451005
006	75915	451.750	015	75915	451007
007	75915	451001	016	75915	451010
008	75915	45101.5	017	75915	451012
009	75915	451002	018	75915	451015

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CM, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodian:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-0589-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:51Z
Check the source to verify that this is the current version before use.