GG-F-001211 (DSA-DM)
13 September 1966

INTERIM FEDERAL SPECIFICATION

FILTER-MIXER-TANK UNIT, PHARMACEUTICAL PROCESSING, Corrosion-Resisting Steel, Single Phase, 110-220 volt, 60 cycle, AC

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pennsylvania 19101, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized the use of this interim Federal specification as a valid exception to Federal Specification

1. SCOPE

1.1 This specification covers one type of rapid filtering unit, suitable for use in the processing of liquid pharmaceuticals in bulk form.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

W-C-596	Connector Plug, Electrical; Connector, Receptacle, Electrical.
UU-P-271	Paper, Wrapping, Waterproofed Kraft.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547 Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Federal

Fed-Std-66 Steel: Chemical Composition and Hardenability.
Fed-Std-406 Plastics, Methods of testing.

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

U.S. Pharmacopeial Convention. Incorporated (U.S.P.)

Pharmacopeia of the United States

(Application for copies should be addressed to Mack Publishing Company, Easton, Pa.)

3. REQUIREMENTS

3.1 First Article. Unless otherwise specified, prior to the start of production of the contract quantity, sample(s) of the Filter-Mixer-Tank Unit, shall be assembled, completely finished, and tested by the contractor. The sample(s) shall be submitted, together with the contractor's inspection and test reports, to the procuring contracting officer for examination and testing to determine compliance with the requirements of this specification. Written approval of the materials, construction, and performance of the sample shall be obtained from the procuring contracting officer, or his authorized representative, prior to the manufacture and assembly of the remaining quantity to be manufactured. Pending approval of the first article(s), acquisition of materials, components, or commencement of production is at the sole risk of the contractor. Accepted sample shall become the property of the procuring activity and shall be included in the quantity called for in the contract or order. In the event that the sample is not approved, the contractor shall submit a new sample for approval, or modify the existent sample so as to remove the deficiencies cited.

3.2 Materials.

3.2.1 Metals. Metals used in the fabrication of the filter-mixer-tank unit shall be AISI No. 316, Corrosion Resisting Steel, conforming to Federal Standard No. 66, with the following exceptions:

Motor	Steel.
Pump components:	
Ball bearings	Steel.
Coupling	Aluminum.
Snapring	Steel.
Lockwasher	AISI 410 corrosion-resisting steel.
Agitator parts:	
Sheaves	Cast iron.
Motor	Steel.
Bearings	Steel.
Bushings	Bronze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.2.2 Plastic. Plastic shall be thermoplastic modified vinyl having the following properties, and shall pass the tests specified in 4.4.1.

Color	Translucent.
Durometer hardness (Shore A)	66 to 72.
Low temperature range	Flexible at 0° Fahrenheit (F.), becoming brittle at minus 40° F.
High temperature range:	
Dry heat	215° F.
Steam	1 hour at 15 pounds.
Elongation, percent	400.
Odor	Slight.
Taste	Slight.
Toxicity	Nontoxic.
Flameproofness	Self-extinguishing.
Lead Content	12 parts per million (max.)

3.2.3 Asbestos. The asbestos used in the packing gland for the agitator shall be impregnated with polytetrafluoroethylene plastic.

3.3 Construction. The unit shall be of the style and design shown on figure 1, and shall consist of the following:

Mixing tank.
Gage glass mounted on the mixing tank, fittings shall be of stainless steel.
Cover for mixing tank.
Filter, including ten 5 inch diameter filter elements FSN 4330-720-0969) (see 3.3).
Centrifugal pump and motor.
Portable stand.
Supports for cylindrical tank.
12 foot flexible plastic hose.
Plastic "see-through" tube.
Miscellaneous valves and fittings, including:
- One 1 inch three way plug valve.
- Two 1/2-inch gage valves.

Unit shall pass the dielectric strength test specified in 4.4.2. Gages specified herein are minimum. Commercial tolerances shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

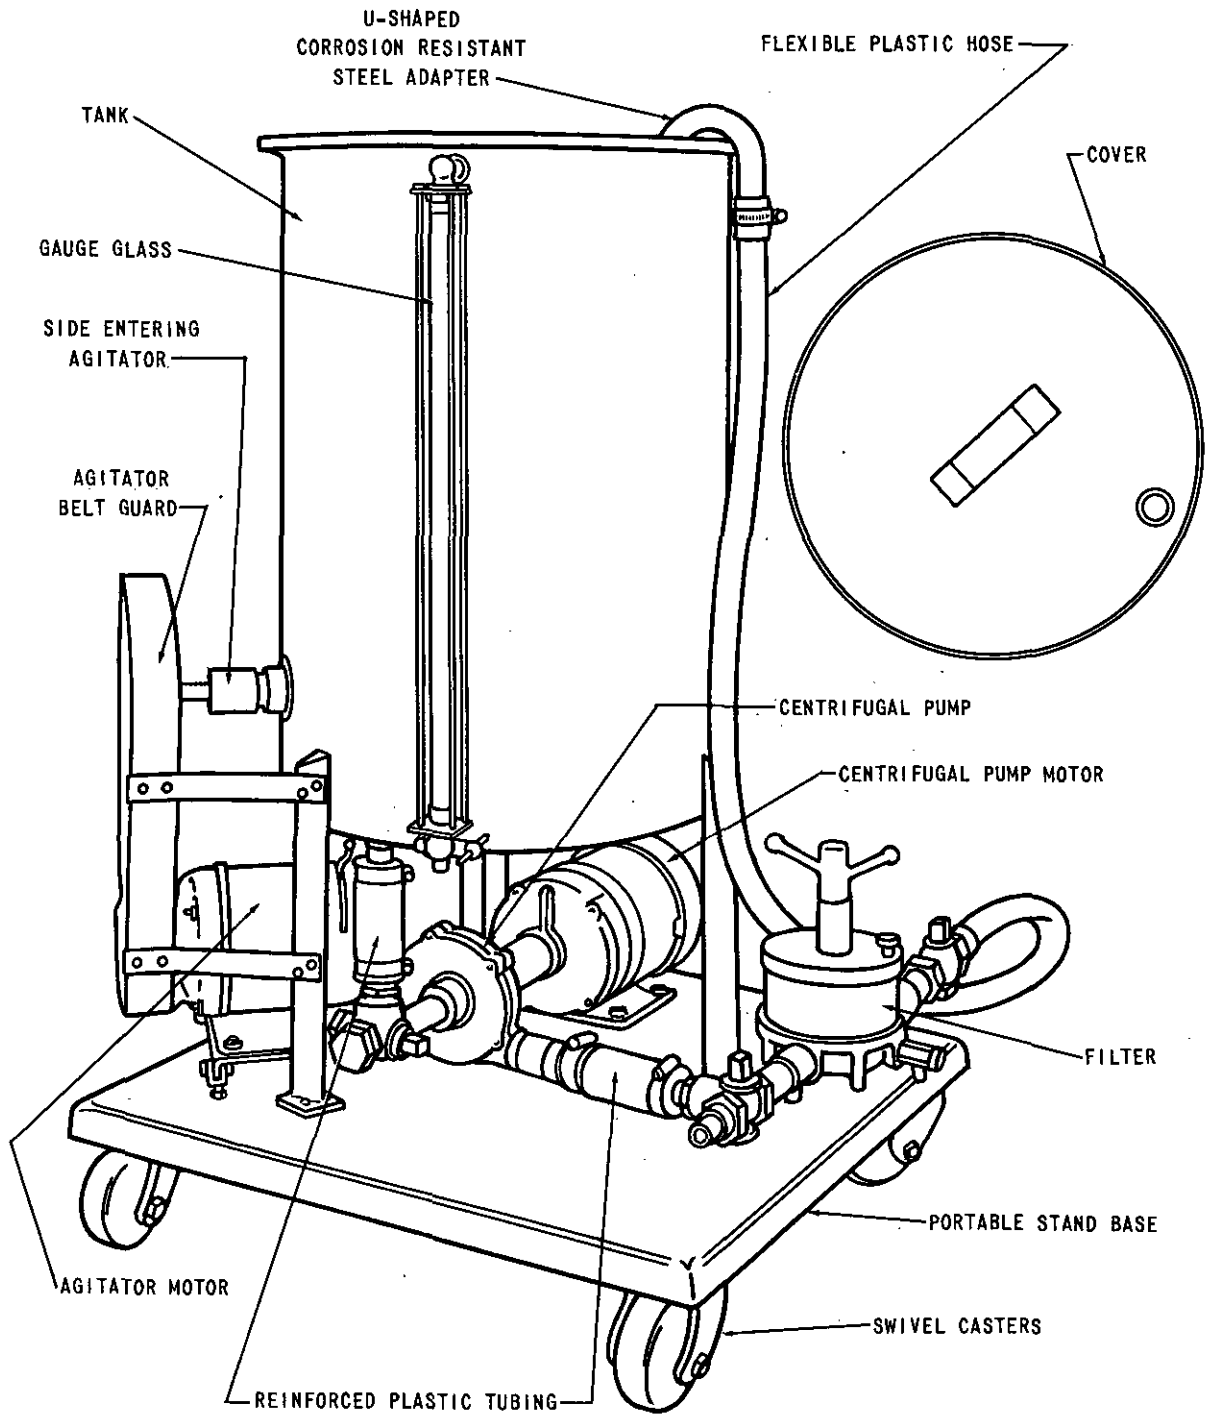


Figure I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.3.1 Mixing tank. The open-top cylindrical mixing tank shall have a free mixing capacity of 15 gallons and a full capacity of 20 gallons. Nominal dimensions shall be 16 inches in diameter by 22 inches deep. The top shall have a 5/8-inch flange, and the bottom a 3/4-inch slope with a 1 inch inside diameter outlet at the lowest point to permit complete drainage. The tank shall be made from 0.062-inch-thick, No. 16, United States Standard (U.S.S.. gage) corrosion-resisting steel. Mixing tank shall have a side-entering agitator.

3.3.1.1 Agitator. The side-entering agitator shall be mounted into the tank through an external packing gland. Agitator propellers shall be 6 inches in diameter and left hand fabricated. Agitator shall be belt driven, and provision shall be made to permit adjustment of drive belt tension. Agitator speed shall be 125 to 420 revolutions per minute (r.p.m.).

3.3.1.1.1 Agitator motor. The agitator motor shall be a 1/4 horsepower, 115 and 230 volt, 2/4 amperes, single phase, 60 cycle, 500 to 1725 r.p.m., open, dripproof, variable speed motor. Maximum temperature rise under load shall be 40° centigrade (C). The motor shall have an "on-off" switch, be provided with a flexible power cord at least 10 feet long, and be securely mounted on the unit stand. Cord shall be equipped with a plug suitable for use with receptacles designated in W-C-596 as Style Series D.-15A, 125V, 2P, 3W, grounding,(MS16658).

3.3.1.1.2 Belt guard. The agitator shall be provided with a belt guard. The belt guard shall be fastened to the tank stand, and shall enclose the agitator, motor pulleys, and the connecting belt.

3.3.2 Cover. The cover shall be made from 0.037-inch-thick, No. 20, U.S.S. gage corrosion-resisting steel. Cover shall have a 5/16-inch flanged edge, reinforced by a 0.062-inch, No. 16, U.S.S. gage strip, welded thereto. Cover shall have a 1-17/32-inch threaded hole, fitted with an open thread protector and a rubber stopper. A handle, formed from a 7-1/2-inch long (+_ 1/8 inch), 1 inch wide (minimum), 0.062-inch thick No. 16, U.S.S. gage steel strip, shall be spot welded to the cover. The cover shall fit loosely on top of the tank.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.

3.3.3 Centrifugal pump and motor. The corrosion resisting steel centrifugal pump shall have a mechanical seal, and shall be powered through a direct drive through a flexible coupling from the motor. The motor shall be 1/2 horsepower, 3450 r.p.m., open, dripproof, 7/3.5 amperes, suitable for operation on 115 and 230 volts, 60 cycle, single phase, alternating current. The motor shall have a maximum temperature rise of 40° C., and shall be provided with a 10 foot minimum length, three wire line cord. The line cord shall include a ground and shall have a snap "on-off", double pole, single throw-switch. Cord shall be equipped with a plug suitable for use with receptacles designated in W-C-596 as Style Series D:15A, 125V, 2P, 3W, grounding, (MS16658). The inlet and the outlet of the pump shall be 1 inch iron pipe size (I.P.S.). The outlet of the pump shall be reduced to 1/2-inch I.P.S. by means of an adapter. The pump capacity shall be such that it shall deliver not less than 9 gallons per minute at a pressure of 6 pounds per square inch, when tested as specified in 4.4.3.

3.3.4 Filter. Filter unit shall be made of corrosion resisting steel. The cylindrical container shall be closed by means of a leakproof cover. Cover shall be removed by unscrewing the handle holding the cover in place. This shall expose the interior section of the filter, which shall then be capable of being easily lifted out for the purposes of replacing the filter and cleaning. The ten filter disk elements, when stacked in the filter, shall furnish 160 square inches minimum of filtration surface. The stacked disks shall be separated by metal spacers or sludge rings of such design that a nominal 20 cubic inches of space shall be provided for collection of sediment. Gasket material shall be suitable for use with pharmaceutical solutions.

3.3.5 Portable stand. The base of the portable stand shall be 0.190-inch thick No. 6, U.S.S. gage corrosion resisting steel. Base shall be rectangular in shape, formed of one solid sheet with nominal dimensions of 30 inches $\pm$ 1/8 inch by 30 inches $\pm$ 1/8 inch, and sides flanged downward not less than 1-1/2 inches. Not less than three supporting legs shall be furnished for the tank. The supporting legs shall be corrosion resisting steel angles, 1-1/2 inches ($\pm$ 1/32 inch) wide, 1/8 inch thick, and 15-1/2 inches ($\pm$ 1/8 inch) long. Both edges of each leg shall be continuously welded to the tank for a minimum distance of 4 inches. Lower ends of the legs shall be welded to squares. 2 inches by 2 inches by 1/4-inch thick. Squares shall be bolted to the base using 1/4-20 corrosion resisting steel machine screws.

3.3.6 Casters. Casters shall be 4-inch-diameter, 1-1/2 inch wide, hard rubber casters, supplied with ball bearings. Axles for casters shall be carbon steel. Caster forks (attached to the base) shall be of the swivelling type, made of high strength, heat treated aluminum. Plates shall be made of cadmium plated steel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:53Z
Check the source to verify that this is the current version before use.

3.3.7 Connections. All valves, connections, and nipples, except as otherwise specified, shall be fabricated of corrosion resisting steel.

3.3.8 Piping and valve assembly. The piping and valve assembly shall be as follows. Drain of the tank shall be connected to a 1 inch slip on hose tank ferrule and a 3-1/2-to 4 inch length of 1 inch reinforced plastic tubing. The plastic tubing shall slip on the inlet of a 1 inch three way plug valve. One inlet of the 1 inch valve shall be connected to the inlet side of the centrifugal pump by a 1 inch nipple. The third side of the valve shall be fitted with a 1 inch pipe plug. The discharge outlet of the centrifugal pump shall be connected to the slip on side of a 1/2-inch National Pipe Thread (NPT) three way valve, by a 1 inch adaptor and a 3/4-inch diameter reinforced plastic hose. The second side of the three-way valve shall be connected to the filter inlet by a 1/2-inch nipple. The third side of the valve shall be fitted with a 3/4-inch hose nipple. The filter outlet, 1/2-inch NPT shall be connected to a 1/2-inch two way ball valve by a 1/2-inch short nipple. The outlet of the two way valve shall be fitted with a 3/4-inch hose nipple. The ends of the nipples shall be smoothed off to permit easier attachment of the plastic tubing.

3.3.9 Flexible hose. For the purpose of transferring the material directly from the tank, through the pump, or through the filter, a 3/4-inch-inside diameter 12 foot minimum length of plastic hose shall be provided. The discharge end of the hose shall be fitted with a U shaped corrosion resisting steel adapter for use in recirculation with the tank.

3.4 Repair parts. In addition to the ten filter elements furnished with the filter, one package of each of the following filter elements shall be supplied with each filter mixer tank unit:

Stock No.	Item Identification
4330-720-0969	FILTER ELEMENT, FLUID, PRESSURE, Asbestos-Cellulose, 100s.
4330-982-6403	FILTER ELEMENT, FLUID, PRESSURE, Asbestos-Cellulose, 100s.
4330-982-6404	FILTER ELEMENT, FLUID, PRESSURE, Asbestos-Cellulose, 100s.

Filter elements shall conform to the requirements of the latest purchase description for the stock number indicated.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:53Z
Check the source to verify that this is the current version before use.

3.5 Finish. All exposed corrosion resisting steel surfaces shall be given a No. 4 commercial finish, except castings which shall have a commercial cast finish. All welds shall be ground smooth and polished to blend with adjacent surfaces. The motor shall be given an enamel finish.

3.6 Identification marking. Each unit shall be permanently and legibly marked in letters not less than 1/16 inch high with the following information:

Stock number.
Contract or purchase order number.
Manufacturer's name or registered trademark.
U.S.

Marking secured by adhesives shall not be used.

3.7 Service data.The contractor shall furnish, with each unit, two copies of service data containing complete instructions for installation, operation, maintenance, and a list of component parts. This information shall specifically include instructions, drawings, and templates for plumbing, power wiring, structural modifications, and special support devices necessary for roughing-in preparations prior to installation of the unit. The service data shall include such detailed information which shall permit ready installation and maintenance of the item. All information contained in the manual shall be suitably indexed to permit ready reference to the required information. Wiring diagrams shall be included for electrical items or components. Wiring diagrams, drawings, and descriptive material shall include adequate information so that the replacement parts can be ordered by the manufacturer's part number, and without confusion as to the item identification. Identical or interchangeable replacement parts shall be identified by a single part number only. One set of the service data, as indicated above, shall be placed in a sealed, waterproof envelope, and affixed securely to the outside of the exterior container. The envelope shall be secured to the exterior container by use of metal ties, nails, or similar means, and shall be located at the end of the exterior container, preferably, when space permits, at the end bearing the markings required by MIL-STD-129. In cases where complete service data is too bulky to be conveniently attached to the outside of the exterior container, the contents of the exterior envelope may be limited to information necessary for roughing-in preparations, and a note shall be made on the exterior covelope which shall indicated where the remainder of the first set of service data will be located.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

When two or more containers are required for packing a disassembled item (components of a single stock number), set markings shall be applied in accordance with MIL-STD-129. The envelope shall be affixed to the container designated as No. 1 of the set. The second set and, if necessary, the remainder of the first set of service data, shall be attached to the unit inside the exterior container. In addition, the contractor shall mail 12 copies of the service data to the contracting officer for distribution.

3.8 Workmanship. Workmanship shall be first class throughout. The filter-mixter-tank unit shall be free of any imperfections which affect its appearance or which may impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Supplier responsibilities for inspection. Such examinations and tests as are set forth in this specification or as shall otherwise be appropriate or necessary to insure that the supplies conform to specification requirements, shall be performed by and at the expense of the supplier. Suppliers who do not have facilities adequate for such tests shall arrange for the use of test facilities acceptable to the Government. Records of examinations and tests performed by the supplier shall be maintained by the supplier and made available to the Government, upon the Government's request, at any time, or from time to time, for a period of 2 years after delivery of the supplies to which such records relate.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, or auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105.

Component (unit of product)	Characteristic	Reqt.	Test procedure	Insp. level	AQL
Filter mixer tank unit	Dielectric strength	3.2	4.4.2	100% inspection	
	Performance	3.2.1 and 3.2.3	4.4.3	S2	(1)
Filter elements	Performance	3.2 and 3.3	PD for FSN's 4330-720-0969, 4330-982-6403, 4330-982-6404		
Plastic	Physical properties	3.1.2	4.4.1		(2)

(1) Acceptance number shall be zero; not less than three samples shall be taken regardless of lot size.

(2) Sufficient samples of each lot of plastic tubing used shall be selected to perform the tests specified.

4.2.3 Raw materials. Four ounces of each lot of each metal used in the construction of the filter mixer tank unit shall be selected for chemical analysis.

4.3 Examination. The filter mixer tank units shall be examined to determine compliance with all requirements contained in this specification.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.

4.4.1 Plastic. Plastic shall be tested as follows:

Characteristic	Method
Color	Visual.
Durometer hardness	Shore durometer.
Low temperature range	Method 2051 of Federal Test Method Standard No. 406.
High temperature range Dry heat	Method 6061 of Federal Test Method Standard No. 406.
Steam	Autoclave 1 hour at 15 pounds per square inch.
Odor	Sensory.
Taste	Sensory.
Toxicity	Lead content of the plastic shall be determined by the dithizone test given in the current edition of the Pharmacopeia of the United States.
Flameproofness	Method 2021 of Federal Test Method Standard No. 406.

4.4.2 Dielectric strength test. With all current carrying parts in the circuit, a test potential of 900 volts shall be developed and maintained for 1 minute between the current carrying and the non current carrying parts.

4.4.3 Operations test. The unit shall be set up and operated in accordance with the manufacturer's instructions, using water at 70° F. ± 3° F. The operation shall be observed to determine compliance with the requirements for mixing capacity specified in 3.2.1 and the rate of delivery specified in 3.2.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Level A.

5.1.1 Unit of issue. One filter-mixer-tank unit, as specified, constitutes one unit of issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

5.1.2 Unit packaging. Each unit shall be protected by wrapping with kraft paper and cushioning with excelsior or paper pads, flexible corrugated fiberboard, or other suitable material. Wrapping and cushioning material shall be secured by tying with twine or sealing with kraft gummed paper tape.

5.1.3 Level C. Units shall be packaged in such a manner, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A. Each unit shall be overpacked in an exterior container, designed for type 3 load, and constructed in accordance with PPP-B-585, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; or PPP-B-621, table IV. The unit shall be adequately secured within the exterior container by means of bolts, wood braces, or other interior fittings, to insure against shifting or breakage. The work shall be accomplished in such a manner that the weight of the unit shall not be carried directly by its casters. Adequate cushioning material shall be used between all bracing and the unit. All box panels, except the base, shall be lined with waterproof barrier material conforming to UU-P-271 for class M-1 or M-2, in such a manner as to prevent direct entry of water. As an alternate, each unit shall be protected with a shroud fabricated of material conforming to UU-P-271, class M-1 or M-2. The exterior container design shall include three skids of not less than 1-1/2 inches in thickness applied crosswise of the base, so positioned as to facilitate handling with a forklift truck and to maintain the unit in an upright position. Closure shall comply with appendix of applicable specification. Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B. Each unit shall be overpacked in an exterior container, designed for type 3 load, and constructed in accordance with PPP-B-585, for class 2 use; PPP-B-601, table I, using type III, class 1 plywood; or PPP-B-621, table II. The unit shall be adequately secured within the exterior container by means of bolts, wood braces, or other interior fittings, to insure against shifting or breakage. The work shall be accomplished in such a manner that the weight of the unit shall not be carried directly by its casters. Adequate cushioning material shall be used between all bracing and the unit. The exterior container design shall include three skids or not less than 1-1/2 inches in thickness applied crosswise of the base, so positioned as to facilitate handling with a forklift truck and to maintain the unit in an upright position. Closure shall comply with appendix of applicable specification. Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. This specification covers a rapid filtering unit for processing liquid pharmaceuticals in bulk and is intended for use in government civilian and military hospitals.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) When First Article is not required (see 3.1).
(c) Where First Article shall be sent (see 3.1).
(d) Selection of applicable levels of packing (see 5.1 and 5.2).

6.3 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD UNDER

DEFENSE SUPPLY AGENCY
DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20th ST
PHILADELPHIA, PA. 19101

POSTAGE FEES PAID
DEFENSE SUPPLY AGENCY

OFFICIAL BUSINESS

DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER

ATTN: DIRECTORATE MEDICAL MATERIEL

2800 SOUTH 20TH STREET

PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

Stock No. 11A 0101 80; 2000

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

GG-F-001211 (DSA-DM)

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT

$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES. ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1426

SMD PPSO 12502

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.