GG-H-1212A
October 31, 1975
SUPERSEDING
Int. Fed. Spec. GG-H-001212(DSA-DM)
November 16, 1966

FEDERAL SPECIFICATION

HAMMER, REFLEX TESTING, TAYLOR

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers a percussion hammer of the Taylor design suitable for the testing of muscle reflex.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of the specification to the extent specified herein:

Federal Specifications:

GG-I-526	-	Instruments, Dental and Surgical; General Specifications.
QQ-B-626	-	Brass, Leaded and Non-Leaded: Rods, Shapes, Forgings, and Flat Products with Finished Edges (Bar, Flat Wire and Strip).
PPP-B-566	-	Boxes, Folding, Paperboard.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-B-676	-	Boxes, Setup.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from the Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Method of.
MIL-L-10547 - Liners, Case and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109 - Quality Assurance Terms and Definitions.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-889 - Metals, Definition of Dissimilar.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

National Motor Freight Traffic Classification, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Attn: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

American Society for Testing and Materials (ASTM) Standards:

D-572 - Accelerated Aging of Vulcanized Rubber by the Oxygen Pressure Method.
D-573 - Accelerated Aging of Vulcanized Rubber by the Oven Method.
D-2240 - Indentation Hardness of Rubber and Plastics by Means of a Durometer.
E-18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Materials. Materials shall be as specified herein. When materials other than those specified are used, the supplier shall certify to the procuring activity that the substitute material enables the instrument to meet the requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the product. When a definite material is not specified, a material shall be used which will enable the instrument to meet the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.1.1 Metal parts. All metal parts shall be as specified in table I. They shall be of a corrosion resistant material or treated in a manner to render them adequately resistant to corrosion.

TABLE I. Metal parts

Component material	Type	Class	Applicable Specification
Steel, stainless	301	3	GG-I-526
Steel, stainless	302	3	GG-I-526
Steel, stainless	303	3	GG-I-526
Brass, Cartridge (70%)	260	8	GG-I-526
Brass, Yellow (65%)	270	8	GG-I-526
Brass (composition 21)1/	-	-	QQ-B-626
Brass (free cutting)	360	8	GG-I-526

1/ Complying with plating and corrosion test requirements for Class 8, type 260, 270 or 360 of GG-I-526.

3.1.1.1 Hardness. When tested as specified in 4.5.1 the metal parts of the instrument shall have a Rockwell hardness of B75 to B85, after proper stress relieving.

3.1.1.2 Dissimilar metals. Dissimilar metals, such as defined by MIL-STD-889, shall not be used in intimate contact with each other unless suitably protected with protective coatings against electrolytic corrosion.

3.1.1.3 Protective treatment. When materials are used in the construction of the instrument that are subject to corrosion likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the requirements of this specification. Protective coatings that will chip or scale during normal service life shall not be used.

3.1.2 Elastomer. The percussion hammer head shall be of natural rubber, synthetic rubber, or other elastomer suitable for the purpose intended. When tested as specified in 4.5.2, the percussion head shall have a durometer hardness of A40-A50 Shore.

3.1.2.1 Resistance to aging. The percussion head shall show no indication of cracking, brittleness, tackiness, or other damage that would render it not suitable for the purpose intended when tested as specified in 4.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.2 Description. The instrument described in this specification is similar or equal to percussion hammers of the Taylor design. It shall consist of a triangular rubber head attached to a handle, shank, and loop of one-piece construction. All of the component parts shall be assembled firmly into a single practical working instrument.

3.2.1 Design and construction. The instrument shall be a percussion hammer of the Taylor design. The handle, shank and loop shall be of one-piece construction. The percussion (rubber) head shall be designed as a replaceable item. It shall be securely attached to the shank loop by an interference fit (both sides of head notched), by means of a screw or by a suitable pin with an interference fit.

3.2.2 Physical dimensions. The physical dimensions of the instrument shall be in accordance with figure I.


3.3 Finish. The metal parts shall have a mirror or mirror and satin finish conforming with the requirements of GG-I-526. If the percussion head is constructed of more than one piece, the pieces shall be permanently joined together and all seams shall be smooth. It shall be free from sharp corners.

3.4 Marking. Identification marking shall be in accordance with the requirements of GG-I-526. In addition, instruments other than those of U.S. manufacture shall also be marked "stainless".

3.5 Interchangeability and substitutability. Interchangeable parts having the same manufacturer's part number shall be functionally and physically interchangeable. Component parts need not be interchangeable between manufacturers and may not be interchangeable with different models produced by the same manufacturer.

3.6 Shelf life. The instrument when properly packaged and packed shall be capable of being stored for a period of five years without showing any evidence of deterioration such as cracks, blisters, softening or brittleness that would lessen the resiliency and useful life of the item or in any way impair its serviceability. Upon removal from storage the instrument shall meet all the requirements as set forth herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

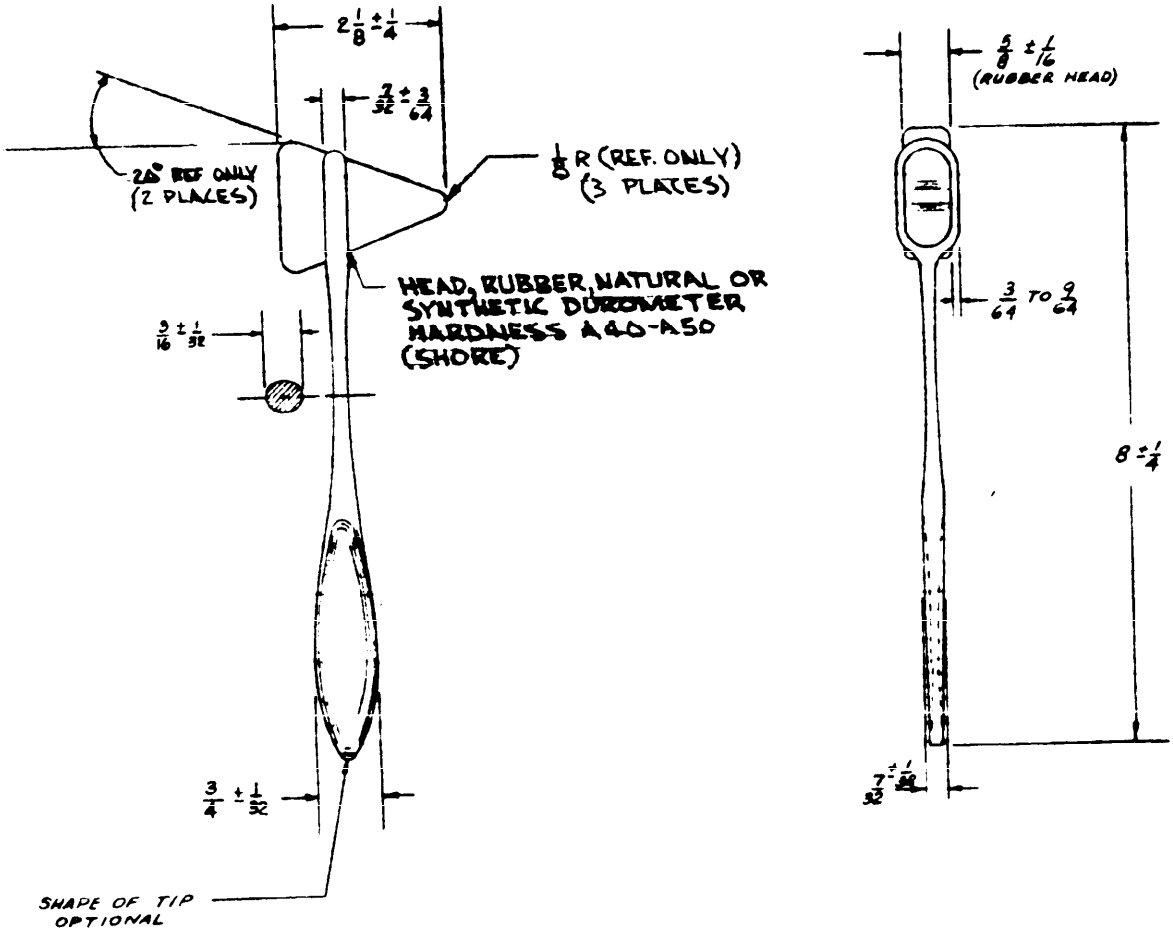

NOTE:

1 - TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.

2 - REMOVE BURRS AND BREAK ALL SHARP EDGES .003-.015

3 - DIMENSIONS ARE IN INCHES

Hammer, reflex, testing

Figure 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.

3.6.1 Shelf life identification. Instruments furnished under this specification shall not be identification marked on the instrument itself. Identification shall be made by marking the packing container or other suitable marking method acceptable to the procuring activity. The date shown shall be the date of manufacture of the percussion head and shall be indicated by quarter of year (Example: 3Q75 indicates a manufacturing date of calendar year 1975).

3.7 Workmanship. Workmanship shall be first class throughout. Reflex testing hammers shall be free from defects which detract from their appearance or impair their serviceability, proper functioning, and intended use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the corrosion-resistant metals may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 Inspection lot. The inspection lot shall be determined in accordance with MIL-STD-105.

4.2.2 Preparation for delivery. The inspection lot size shall be expressed in units of one fully prepared shipping container, containing complete instruments fully prepared for delivery and made from essentially the same materials and components. The sample unit shall be one fully prepared shipping container, containing instruments fully prepared for delivery, with the exception that it need not be sealed. The inspection shall be Inspection Level S-2 and the Acceptable Quality Level shall be 4.0 percent defective in accordance with MIL-STD-105.

4.2.3 Sampling for examination. A random sample of hammers shall be selected from each lot offered to the Government in accordance with MIL-STD-105. The Acceptable Quality Levels (AQL's) shall be as indicated in table II. The unit of product shall be one hammer.

TABLE II. Sampling for examination

Type defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor A	II	2.5
Minor B	S-2	4.0

4.2.4 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in table III. Where feasible, the same sample shall be used for the determination of two or more test characteristics. Unless otherwise specified the unit of product for tests shall be one hammer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

TABLE III. Sampling Criteria

Component	Characteristic	Requirement	Test procedure	Inspection level	AQL
Handle (including shank and loop)	Hardness 1/ Salt spray 2/ Boil test Coating thickness 2/	3.1.1 GG-I-526	4.5.1 GG-I-526	S-2	3/
Head, percussion	Durometer hardness Accelerated aging	3.1.2 3.1.2.1	4.5.2 4.5.3	S-2	3/

1/ Test to be performed on class 3 material only.
2/ Test to be performed on class 8 material only.
3/ Acceptance number shall be zero for all sample sizes.

4.2.5 Raw materials. A sufficient amount from each lot of each metal used in the construction of the hammers shall be selected for chemical analysis.

4.3 Examination. The hammers shall be examined to determine compliance with all requirements contained in this specification. Examination shall be conducted as specified in table II and IV. Examination, however, shall not be restricted to defects listed in table IV. Any hammers in the sample containing one or more defects shall be rejected and if the number of defective hammers in any sample exceeds the acceptance number for that sample, the lot represented by that sample shall be rejected.

TABLE IV. Classification of defects.

Catergories	Defects
Critical	None defined.
Major	
101	Rubber head not securely attached to the shank.
102	Rubber head not free from cuts, tears, slits, holes.
103	Surface of rubber head not smooth, free and embedded foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (Cont'd)

Categories	Defects
104	Hammer not uniform and symmetrical in dimensions.
105	Metal parts not free of pits, corrosion, and discoloration.
106	Metal parts, if fabricated of stainless steel, not free of plating.
107	Metal parts, if fabricated of brass, not completely plated.
108	Metal parts not free of cracks.
109	Metal parts not free of burrs, sharpness, and roughness.
Minor A	
201	Finish of metal parts not as specified.
202	Finish of metal parts not free of coarse grind marks or excessively scratched surface areas.
203	Rubber head not free from surface dirt, stains, and discoloration.
204	Identification marking not permanent, legible, and complete.
Minor B	
251	Dimensions not within tolerances specified.

4.4 Examination of preparation for delivery. Each of the fully prepared shipping containers, containing instruments, selected as a sample unit from the lot shall be visually examined to determine whether the packaging, packing and marking conform to this specification. The classification of defects, Table V, shall be used to classify the defects found.

TABLE V. Examination of preparation for delivery

Examine	Defects
Markings	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing; any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

TABLE V. Examination of preparation for delivery (cont'd)

Examine	Defects
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
Contents,	Number of intermediate packages is more or 1 less than required; gross/net weight exceed requirements.

4.4.1 Examination of closure, waterproofing and banding of container. When the shipping container is required to comply with PPP-B-636, the examination for defects in closure, waterproofing or banding shall be in accordance with the appendix of the box specification.

4.5 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.5.1 Rockwell Hardness. Hardness shall be determined in accordance with ASTM test method E18. A minimum of 5 hardness readings shall be made on test specimens representative of the material used in the fabrication of the instrument or on the finished end item.

4.5.2 Durometer hardness. Durometer hardness shall be determined in accordance with test method ASTM D 2240. A minimum of ten hardness readings shall be made on test specimens fabricated from the same material batch used in the manufacture of the percussion hammer head.

4.5.3 Accelerated aging. Test specimens fabricated from the same material batch used in the manufacture of the percussion hammer head, shall be subjected to accelerated aging in accordance with test method ASTM D 572. The aging period shall be 94 ± 1/2 hours at 70 ± 1°C. Test method ASTM D 573 may be used as an alternate. The aging period shall be 166 ± 1 hours at 70 ± 1° C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Level A.

5.1.1.1 Unit package. Each hammer shall be thoroughly clean, wrapped in neutral tissue or other suitable anti-corrosive material. The hammer shall be further packaged in accordance with MIL-P-116, method IC-2, except that a preservative shall not be utilized.

5.1.1.2 Intermediate package. Six unit packages shall be packaged in snug fitting box constructed in accordance with PPP-B-566, PPP-B-636, class domestic or PPP-B-676. Closure of the box shall be adequate to prevent accidental opening.

5.1.2 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A. Sixteen intermediate packages shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed in accordance with 30.4 of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B. Sixteen intermediate packages shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure of wood boxes shall be as specified in the appendix of the applicable box specification. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636.

5.2.3 Level C. Hammers, in quantities as specified (see 6.1), shall be packed in containers to assure carrier acceptance and safe arrival at destination. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking.

5.3.1 Civil agencies. Marking shall be in accordance with the requirements of Federal Standard No. 123.

5.3.2 Military agencies.

5.3.2.1 Interior packages. Each unit and intermediate package shall be marked in accordance with MIL-STD-129. Contract or purchase order number and name of contractor shall be shown. Shelf life identification shall be Type II as specified in MIL-STD-129. Marking shall include the legend "Store at controlled room temperature (59° - 86°F.)."

5.3.2.2 Exterior container. Exterior containers shall be marked in accordance with MIL-STD-129. Shelf life identification shall be Type II as specified in MIL-STD-129. Marking shall include the legend "Store at controlled room temperature (59° - 86° F.)."

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Applicable levels of packaging and packing, (see 5.1 and 5.2).
(c) Quantity (see 5.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

6.2 National Stock Number (NSN). This specification is intended to cover the following item appearing in the Federal Supply Catalog:

National Stock No.	Item Identification
6515-00-340-6700	HAMMER, REFLEX TESTING, TAYLOR

6.3 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

6.4 Military requirements. Military requirements shall apply to all instruments purchased by military agencies. Where applicable, military requirements shall be in addition to all other requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DSA-DM
Project No. 6515-1943
Civil Agency Coordinating Activities:
GSA-FSS
VA-DMS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents reference herein. Price 40 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
GG-H-1212A HAMMER, REFLEX TESTING, TAYLOR

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 65 WHICH MAY BE USED

☆ GPO 1974— 603-680/6126 2-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:53Z
Check the source to verify that this is the current version before use.