[INCH-POUND]
A-A-59266
2 October 1998
SUPERSEDING
MIL-G-23823E
16 April 1991

COMMERCIAL ITEM DESCRIPTION

GRINDING MACHINE, UNIVERSAL, CYLINDRICAL, EXTERNAL, CENTER-TYPE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers cylindrical universal grinding machines intended for grinding workpieces where uniform tolerances for size, roundness, and finish on a wide variety of materials are required.

2. CLASSIFICATION. The cylindrical universal grinding machines shall be of the following types swings, and sizes. The type, swing, and size to be furnished shall be as specified (see 7.2(b)).

Type I - Standard performance
Type II - High performance

Swing - See table I

Size - See table I

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

TABLE I. Machine swings and sizes.

Swing,	Size – center-to-center distance, inches											
inches	16	20	24	26	36	40	48	60	72	80	96	120
8	X	X	X	X	X	X		X	X	X		
10		X		X		X		X		X	X	
12	X	X	X	X	X	X	X	X	X	X		
14			X		X	X	X	X		X	X	X
18			X		X		X		X		X	
24			X		X		X	X	X		X	
30			X		X		X		X		X	

NOTE: "X" denotes availability.

3. SALIENT CHARACTERISTICS

3.1 General requirements. The grinding machine shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair.

3.1.1 Identification of axis. Unless otherwise specified (see 7.2(c)), all axes of the grinding machine shall be identified in accordance with American National Standards Institute (ANSI)/Electronics Industries Association (EIA) 267.

3.2 Components. The grinding machine shall include, as a minimum, the following components:

3.2.1 Bed and base. The bed and base material shall be of sufficient strength and rigidity to support the machine components and to withstand the vibration, stress, and loads imposed on the machine during operation. The bed shall support and allow for precision movement of the traversing table and the grinding wheel base assembly. A means shall be provided for leveling and anchoring the machine to the floor. Access doors or removable panels shall be provided for servicing components housed within the base.

3.2.2 Workhead. Unless otherwise specified (see 7.2(d)), the workhead shall have the capability for live and dead center grinding, with provisions for changeover to either operation. The workhead shall support the workpiece using chucks or collets. Unless otherwise specified (see 7.2(e)), spindle noses and tapers shall conform to the manufacturer's standard. The workhead shall swivel on its base a minimum of 90 degrees toward the wheelhead to facilitate angle and face grinding. The workhead shall have means to indicate swivel position in degrees and provisions for securing the workhead in the desired position within the swivel range. The workhead shall rotate the workpiece during grinding.

3.2.3 Tailstock. A tailstock shall be provided for support of longer workpieces. The tailstock shall be longitudinally adjustable along the swivel table. Means for securing the tailstock after adjustment shall be provided. Unless otherwise specified (see 7.2(f)), the internal taper of the tailstock center shall be the manufacturer's standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

3.2.4 Traversing table. The traversing table shall support a swivel table and its attached components. The longitudinal traverse distance shall be adjustable. Unless otherwise specified (see 7.2(g)), the traversing table shall have automatic movement with a fast and normal traverse rate, automatic reversal at a preset point, and shall traverse longitudinally on the bed.

3.2.5 Swivel table. The swivel table shall be mounted on the traversing table and shall be capable of swiveling in the horizontal plane for grinding included angles and tapers. The swivel table shall have means to indicate swivel position in increments of 1 degree or less and provisions for securing the swivel table in the desired position within the swivel range. The number and size of T-slots shall be as specified (see 7.2(h)). The dimensions of the T-slots shall conform to the requirements of ANSI B5.1.

3.2.6 Wheelhead assembly. The wheelhead shall swivel to allow for angle, face, and taper grinding of the workpiece. The grinding wheelhead assembly shall include a wheelhead housing, spindle, grinding wheel, spindle drive system, and internal grinding assembly. The wheelhead shall be mounted on the bed and shall traverse across the table. Unless otherwise specified (see 7.2(i)), the minimum crossfeed range shall allow the perimeter of the maximum diameter grinding wheel to traverse to the workpiece centerline. A graduated scale shall be provided to indicate swivel position in increments of 1 degree or less. A means shall be supplied for locking the wheelhead in place after positioning. The wheelhead shall be designed to accept grinding wheels of differing outside diameters.

3.2.6.1 Spindle. The spindle shall accept standard commercial grinding wheels. The spindle shall rotate the grinding wheel at a speed sufficient to perform all tests referenced in section 5.3. If the spindle is driven by a belt and pulley, a manual or automatic mechanism to adjust belt tension shall be provided. Unless otherwise specified (see 7.2 (j)), the spindle horsepower shall be that considered as standard by the manufacturer.

3.2.6.2 Grinding wheel. A grinding wheel(s) shall be provided as specified (see 7.2(k)). The wheels shall conform to ANSI B74.2, marked in accordance with ANSI B74.13, and shall meet the safety requirements established in ANSI B7.1.

3.2.7 Internal grinding assembly. The grinding machine shall be equipped with an internal grinding assembly consisting of a spindle, quills, and drive assembly. The spindle shall be designed to allow use of a variety of grinding wheel sizes and quills.

3.2.8 Controls. The manufacturer shall supply manual and automatic controls for operation of the machine. The controls shall be easily seen and conveniently operated from the control station. All components of the control system shall be protected from damage caused by the normal grinding environment of vibration, coolant splash, grinding swarf or dust, and electric power fluctuations.

3.2.8.1 Control panel. Unless otherwise specified (see 7.2(l)), the control panel shall include, as a minimum, the following manual controls and switches:

a. Emergency stop button.
b. Power on/off switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

c. Coolant flow.
d. Grinding wheel rotation.
e. Wheelhead assembly infeed (fast and normal).
f. Grinding feedrate.
g. Traversing table motion (fine and coarse).
h. Workhead rotation.
i. Sparkout timing mechanism.

3.2.8.2 Automatic controls. An automatic infeed cycle for plunge and traverse grinding shall be provided. The automatic cycle shall include a means of controlling infeed increments at desired reversal and for limiting the total infeed for traverse grinding cycle. A safety interlock shall prevent simultaneous operation of the automatic and manual wheelhead infeed. After completion of the automatic cycle, the machine shall be able to repeat the automatic cycle without further adjustment or input using the start or repeat switch. Unless otherwise specified (see 7.2(m)), automatic controls shall be provided, as a minimum, for the following functions:

a. Wheelhead assembly infeed.
b. Traversing table motion.
c. Workhead rotation.
d. Grinding wheel rotation.
e. Coolant flow.
f. Sparkout.
g. Grinding feedrate.

3.2.8.3 Electronic control system. Unless otherwise specified (see 7.2(n)), an electronic control system with closed loop feedback capability and a digital readout system shall be supplied with the grinding machine. The digital readout display shall indicate wheelhead and table position over the entire travel range of each axis. The digital readout display shall be visible to the operator while controlling the grinding machine. The system shall have an accuracy of ±0.00001 inch.

3.2.9 Lubrication system. Unless otherwise specified (see 7.2(o)), the grinding machine shall be equipped with an automatic lubricating system to direct oil flow from the reservoir to all machine components requiring continuous lubrication. A means shall be provided for determining oil level in the reservoir. The automatic lubricating system shall include a cleanable or replaceable filter. Upon loss of pressure in the automatic lubrication system, the grinding machine shall automatically stop. Machine parts requiring periodic manual lubrication shall be readily accessible through doors or removable panels.

3.2.10 Coolant system. Unless otherwise specified (see 7.2(p)), the grinding wheel shall be flood cooled. As a minimum, the coolant system shall consist of a reservoir, pump, strainer, and all necessary piping. The system shall be equipped with a method to control the rate of coolant flow from the reservoir and to direct coolant flow to the grinding area. When specified (see 7.2(q)), an optional filtration system shall be provided.

3.2.11 Hydraulic system. When provided, the hydraulic system shall conform to the requirements of National Fluid Power Association (NFPA) T2.24.1. The hydraulic system shall be complete and include all pumps, valves, piping, cylinders, and controls. Means shall be provided to prevent damage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

to the components from overpressure. A filter system shall be provided to ensure delivery of clean fluid. The hydraulic reservoir shall have means for determining fluid level.

3.2.12 Electrical system. Unless otherwise specified (see 7.2(r)), the electrical system shall conform to the ANSI/National Fire Prevention Association (NFPA) 79. The machine shall have dual 230/460-volt, 3-phase, 60-hertz circuit capability and shall be wired for the voltage specified (see 7.2(s)). Unless otherwise specified (see 7.2(t)), the control system power shall be provided by a separate 120-volt, single-phase, 60-hertz circuit from the machine main power supply.

3.2.13 Electric motors. The wheelhead and internal grinding (if applicable) drive motor(s) shall have sealed and permanently lubricated ball or roller bearings, shall be energy efficient, and shall conform to the National Electrical Manufacturers Association (NEMA) MG-1. Unless otherwise specified (see 7.2(u)), the motors shall have open dripproof enclosures. Each motor control shall conform to NEMA ICS-1 and ICS-3.

3.2.14 Optional accessories. Optional accessories shall be provided as specified (see 7.2(v)).

3.3 Performance. Unless otherwise specified (see 7.2(w)), the grinding machines shall meet the alignment and performance requirements shown in tables II and III, respectively, when tested in accordance with section 5.3 through 5.4.

TABLE II. Alignment requirements.

Parameter	Performance type	
	Type I - standard performance	Type II - high performance
Table straight in horizontal direction	0.00028 inch per foot TIR [1], maximum 0.0021 inch [2]	0.00018 inch per foot TIR, maximum 0.00135 inch [2]
Table flat or level in vertical direction	0.00028 inch per foot TIR, maximum 0.0021 inch [2]	0.00018 inch per foot TIR, maximum 0.00135 inch [2]
Guideways of headstock and tailstock parallel with table movement	0.00014 inch per foot TIR, maximum 0.0011 inch [2]	0.00009 inch per foot TIR, maximum 0.00068 inch [2]
Axis of headstock parallel with table movement in vertical plane	0.0006 inch per foot, TIR	0.0004 inch per foot, TIR
Axis of headstock parallel with table movement in horizontal plane	0.0006 inch per foot, TIR	0.0004 inch per foot, TIR
Center point for true running	0.0003 inch, TIR	0.00015 inch, TIR
Sleeve parallel with table movement in vertical plane	0.0025 inch per foot, TIR	0.0015 inch per foot, TIR
Taper of spindle running true	0.0006 inch, TIR	0.0004 inch, TIR

[1] TIR is total indicated reading.

[2] Maximum rated center-to-center distance. Swing or distance between centers of less than 1 foot are to consider their swing or center distance as 1 foot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

TABLE III. Performance requirements.

Parameter	Performance type	
	Type I - standard performance	Type II - high performance
Surface straightness	0.0001 inch per foot TIR [1], 0.0005 inch maximum	0.00005 inch per foot TIR, 0.00025 inch maximum
Roundness	0.0001 inch per foot of swing diameter [2], TIR	0.00005 inch per foot of swing diameter [2], TIR
Repeatability	0.0001 inch	0.00005 inch
Surface roughness	5 microinches, R_t [3]	5 microinches, R_t [3]
Inside surface roughness	5 microinches, R_t [3]	5 microinches, R_t [3]
Inside straightness	0.0001 inch, TIR	0.00005 inch, TIR
Inclination	0.011 degree	0.006 degree

[1] TIR is total indicated reading.

[2] Swing or distance between centers of less than 1 foot are to consider their swing or center distance as 1 foot.

[3] R_t is total roughness as defined in American Society of Mechanical Engineers (ASME) B46.1, with an evaluation length of 0.1 inch.

3.4 Machine dimensions and weight. If required, the maximum machine dimensions (length, width, and height) and machine weight shall not exceed the restrictions specified (see 7.2(x)).

3.5 Safety and health requirements. The machine shall be designed and manufactured in accordance with ANSI B11.9. The manufacturer shall ensure that the machine and all equipment and accessories used on the machine shall be in compliance with Occupational Safety and Health Administration (OSHA) 29 CFR PART 1910. If a conflict arises between the ANSI B11.9 and OSHA standards, the OSHA standards shall apply.

3.6 System of units. The U. S. Customary System of Units (US) or the International System of Units (SI) shall be used to graduate measuring and indicating devices. When only one system of graduation is acceptable, the particular graduation required shall be as specified (see 7.2(y)). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system. When specified (see 7.2(z)), measuring and indicating devices shall be graduated in both the US and SI system of measurements.

3.7 Nameplate. A nameplate shall be securely attached to the machine. Unless otherwise specified (see 7.2(aa)), the nameplate shall contain the following information:

a. Nomenclature.
b. Manufacturer's name.
c. Serial number.
d. Machine model designation.
e. Power input (volts, total amperes, phase, frequency).
f. Short-circuit/over-current rating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

g. Contract number or order number.
h. National stock number.
i. Date of manufacture.

3.8 Lubrication plate or chart. When specified (see 7.2(bb)), a lubrication plate or chart shall be attached to the machine. The information provided on the plate or chart shall include:

a. Points of lubricant application.
b. Servicing interval.
c. Type of lubricant(s) with SAE number or lubricant identifier.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency (EPA) restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products shall meet the salient characteristics of this commercial item description; conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Inspection. The grinding machine shall be inspected to determine compliance with all requirements specified in this CID.

5.3 Testing. Unless otherwise specified (see 7.2(cc)), the grinding machine shall be tested in accordance with sections 5.3.1 through 5.3.3.10.

5.3.1 Test setup and conditions. Unless otherwise specified (see 7.2(dd)), the manufacturer shall be responsible for supplying all tooling and material(s) and shall conduct all tests required by the Government. The manufacturer shall provide test instruments and equipment with calibration traceable to National Institute of Standards and Technology (NIST) and shall provide certification of calibration as specified (see 7.2(ee)). Unless otherwise specified (see 7.2(ff)), the machine shall be tested in an indoor facility with the temperature between 40 and 110 degrees Fahrenheit and the relative humidity between 20 and 95 percent, noncondensing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

5.3.2 Operational test. The grinding machine shall be operated in accordance with the manufacturer's standard operating procedures. The grinding machine shall be operated at a no-load condition for not less than 2 hours. Proper operation of all controls and features shall be verified during the trial period.

5.3.3 Performance tests. The contractor shall demonstrate the machine's capability to traverse grind, internal grind, plunge grind, angle grind, and taper grind. All performance tests shall be completed without making any adjustments to or performing any maintenance on the machine. The grinding wheel may be shaped, dressed, or changed during the test at the manufacturer's option.

5.3.3.1 Alignment. The grinding machine alignment shall be checked before and after the workpiece grinding tests and shall meet the alignment requirements shown in table II. Changes in alignment shall be cause for rejection.

5.3.3.2 Traverse and plunge grind workpiece. The workpiece shall meet the requirements shown in tables IV and V. The workpiece shall be steel; the type and grade shall be the manufacturer's option. During the performance test, the workpiece may be supported at the manufacturer's discretion using the manufacturer's standard methods, provided they are available to the purchaser.

TABLE IV. Workpiece length dimensions.

Distance between centers, inches	Workpiece length, inches
16	12
24	24
48	36
72	48
Above 118	60

TABLE V. Workpiece diameter.

Rated swing, inches	Workpiece diameter, inches
8	2
12	4
Above 18	6

5.3.3.3 Internal grind workpiece. The workpiece for the internal grinding test shall have a minimum inside diameter of 1.5 inches. The depth of the bore shall allow for an internal grinding depth of 1.5 inches. The length of the workpiece shall be at the manufacturer's discretion. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

workpiece shall be steel; the type and grade shall be the manufacturer's option. The workpiece shall be placed in the same type of chuck to be delivered with the grinder.

5.3.3.4 Angle grind workpiece. The workpiece for the angle grind test shall be a bar with three 30 and three 45 degree angles for finish grinding. The bar shall be steel; the type and grade shall be the manufacturer's option.

5.3.3.5 Traverse grind. The workpiece shall be traverse ground to reduce the diameter of the workpiece by 0.01 inch for type I machines and 0.005 inch for type II machines. The number of passes is the manufacturer's option. The finished workpiece shall be measured in at least three places and meet the requirements for roundness and surface straightness shown in table III. The maximum deviation between the final diameters shall meet the requirement shown in table III for repeatability.

5.3.3.6 Internal grind. An internal grind test removing a minimum of 0.005 inch of material shall be performed. The grinding depth shall be a minimum of 1 1/2 inches. The inside diameter surface shall be measured in at least three places and meet the requirements for inside straightness and inside surface roughness shown in table III.

5.3.3.7 Plunge grind. Five plunge grinding operations shall be performed. The plunge grinding shall reduce the diameter of the workpiece by 0.01 inch for type I machines and 0.005 inch for type II machines. The finished workpiece shall be measured in at least three places for each plunge and meet the requirements for roundness. The difference in diameters at the five locations shall meet the requirement shown in table III for repeatability.

5.3.3.8 Angle grind. The grinding machine shall perform an angle grind on angled surfaces of 30 and 45 degrees on the angle grind workpiece. The depth of the grind shall be 0.005 inch. The difference between the three angles of each set shall meet the requirements shown in table III for inclination.

5.3.3.9 Taper grind. The grinding machine shall perform an 8-inch taper grind by rotating the swivel table. The taper shall be 1/2 inch per foot. The finished workpiece shall be measured in at least three places. The variation between design and actual taper shall meet the requirements for surface straightness value shown in table III.

5.3.3.10 Optional tests. Optional tests shall be conducted as specified (see 7.2(gg)).

5.4 Acceptance. Unless otherwise specified (see 7.2(hh)), preliminary and final acceptance tests shall be conducted at the manufacturer's site. The results of the alignment and performance tests shall be compared with the requirements shown in tables II and III, respectively. Failure of the machine to meet the requirements shown in tables II and III shall be cause for rejection.

6. PACKAGING. Preservation, packing, and marking shall be as specified (7.2(ii)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Sources of referenced documents.

7.1.1 Government documents. Copies of Federal documents may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

7.1.2 Industry standards. Copies of industry standards referenced in this CID may be obtained from the following addresses:

American National Standards Institute (ANSI)

ANSI B5.1	T-Slots, Their Bolts, Nuts, and Tongues
ANSI B7.1	Safety Requirements for the Use, Care and Protection of Abrasive Wheels
ANSI B11.9	Safety Requirements for the Construction, Care and Use of Grinding Machines
ANSI B74.2	Specification for Shapes and Sizes of Grinding Wheels and for Shapes, Sizes and Identification of Mounted Wheels
ANSI B74.13	Markings for Identifying Grinding Wheels and Other Bonded Abrasives

Applications for copies should be sent to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

American Society of Mechanical Engineers (ASME)

ASME B46.1	Surface Texture (Surface Roughness, Waviness, and Lay)

Applications for copies should be sent to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.

Electronic Industries Association (EIA)

ANSI/EIA 267	Axis and Motion Nomenclature for Numerically Controlled Machines

Applications for copies should be sent to Electronic Industries Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

National Electrical Manufacturers Association (NEMA)

NEMA MG-1	Motors and Generators
NEMA ICS-1	Industrial Control and Systems General Requirements
NEMA ICS-3	Industrial Control and Systems Factory Built Assemblies

Applications for copies should be sent to the National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209.

National Fire Protection Association (NFPA)

ANSI/NFPA 79	Electrical Standard for Industrial Machinery

Applications for copies should be sent to the National Fire Protection Association, One Batterymarch Park, P. O. Box 9101, Quincy, MA 02269-9101.

National Fluid Power Association (NFPA)

NFPA T2.24.1	Hydraulic Fluid Power - System Standard For Stationary Industrial Machinery First Edition

Applications for copies should be sent to the National Fluid Power Association, 3333 North Mayfair Road, Suite 311, Milwaukee, WI 53222-3219.

U. S. Department of Labor, Occupational Safety and Health Administration (OSHA)

OSHA 1910	General Industry, Safety and Health Standards (29 CFR 1910)

Applications for copies should be sent to the U. S. Department of Labor, 200 Constitution Avenue NW, Room 423, Washington, DC 20210.

7.2 Ordering data. Acquisition documents must specify the following:


a. Title, number, and date of this document.
b. Type, swing, and size required (see 2).
c. Identification of axis, if different (see 3.1.1).
d. Workhead, if different (see 3.2.2).
e. Spindle nose and taper, if different (see 3.2.2).
f. Tailstock internal taper, if different (see 3.2.3).
g. Traversing table, if different (see 3.2.4).
h. T-slots, as specified (see 3.2.5).
i. Crossfeed range, if different (see 3.2.6).
j. Spindle horsepower, if different (see 3.2.6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

k. Grinding wheels, as specified (see 3.2.6.2).
l. Manual controls and switches, if different (see 3.2.8.1).
m. Automatic controls, if different (see 3.2.8.2).
n. Electronic controls, if different (see 3.2.8.3).
o. Lubrication system, if different (see 3.2.9).
p. Coolant system, if different (see 3.2.10).
q. Coolant system filter, if required (see 3.2.10).
r. Electrical system, if different (see 3.2.12).
s. Electrical system voltage, as specified (see 3.2.12).
t. Electrical system control voltage, if different (see 3.2.12).
u. Motor enclosure, if different (see 3.2.13).
v. Optional accessories, as specified (see 3.2.14).
w. Performance, if different (see 3.3).
x. Machine dimensions and weight, as specified (see 3.4).
y. System of units required (see 3.6).
z. Dual system of units, if required (see 3.6).
aa. Nameplate, if different (see 3.7).
bb. Lubrication plate or chart, if required (see 3.8).
cc. Testing, if different (see 5.3).
dd. Test responsibility, if different (see 5.3.1).
ee. Certification of calibration, as specified (5.3.1).
ff. Test environmental conditions, if different (see 5.3.1).
gg. Optional tests, as specified (see 5.3.3.10).
hh. Acceptance, if different (see 5.4).
ii. Packaging requirements, as specified (see 6).

7.3 Part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

AA59266-XXXXXX

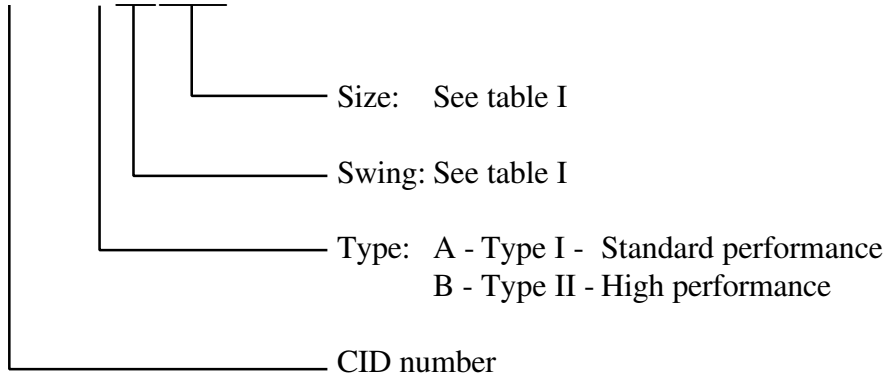

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - AL
Navy - SH
Air Force - 99

Reviewers
Air Force - 84
Navy - AS, MC

PREPARING ACTIVITY:
DLA - GS

(Project 3415-0238)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.