[INCH-POUND]
A-A-59269A
26 August 1999
SUPERSEDING
(See Section 7.)

# COMMERCIAL ITEM DESCRIPTION

# SCALES, DRAFTING AND SCALES, PLOTTING

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the requirements for eight types of drafting and plotting scales for measuring and laying out linear dimensions.

2. CLASSIFICATION. The drafting scales shall be classified by the types listed below. The selected type of scale to be supplied shall be specified in the acquisition order (see 7.3(b)).

Type I - Scale, drafting: architect's 12-inch

Type II - Scale, drafting: architect's 18-inch

Type III - Scale drafting: combination English and metric measurement system

Type IV - Scale, drafting: surveyor’s

Type V - Scale, plotting

Type VI - Scale, plotting: plotting and drafting

Type VII - Scale, plotting: metric

Type VIII - Scale, plotting: meters and yards

3. SALIENT CHARACTERISTICS

3.1 Types. The types of scales shall be as specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

3.1.1 Type I. Type I scale shall have one edge fully divided into one-sixteenth inch, each inch direct or boustrophedon numbered. The other edges shall be double divided in the following combinations: three-thirty seconds inch and one-eighth inch; three-sixteenths inch and one-quarter inch; three-eighths inch and one-half inch; three-quarters inch and one inch; one and one-half inches, and three inch divisions. The end unit of each full graduation of open-divided architect's scale shall be divided as follows: three-thirty seconds inch and one-eighth inch, six divisions; three-sixteenths inch, one-quarter inch and three-eighths inch, twelve divisions; one-half inch; three-quarters inch, twenty-four divisions, numbered at three, six, and nine, or unnumbered; one inch, one and one-half inches, forty-eight divisions, numbered at three, six and nine; and three inches, ninety-six divisions, numbered at three, six, and nine. Type I scale shall have the following shape: six bevels, triangular, facet or concave. It shall be made of wood with plastic facings. Type I scale shall be furnished in 12-inch nominal lengths.

3.1.2 Type II. Type II scale shall have one edge fully divided into one-sixteenth inch, each inch direct or boustrophedon numbered. The other edges shall be double divided in the following combinations: three-thirty seconds inch and one-eighth inch; three-sixteenths inch and one-quarter inch; three-eighths inch and one-half inch; three-quarters inch and two inch; one and one-half inches, and three inch divisions. The end unit of each full graduation of open-divided architect's scale shall be divided as follows: three-thirty seconds inch and one-eighth inch, six divisions; three-sixteenths inch, one-quarter inch and three-eighths inch, twelve divisions; one-half inch; three-quarters inch, twenty-four divisions, numbered at three, six, and nine, or unnumbered; one and one-half inches and two inches, forty-eight divisions, numbered at three, six and nine; and three inches, ninety-six divisions, numbered at three, six, and nine. Type II scale shall have the following shape: six bevels, triangular, facet or concave. It shall be made of wood with plastic facings. Type II scale shall be furnished in 18-inch nominal lengths.

3.1.3 Type III. Type III scale shall be fully divided, with one edge divided to a minimum reading of 0.5 millimeter, with every centimeter numbered. The other edge shall be divided into 12 inches, subdivided into thirty-seconds of an inch, with each inch numbered. Type III scale shall have the following shape: Two bevels, flat, opposite (parallelogram). It shall be made of wood with plastic facings. Type III scale shall be furnished in 30-centimeter nominal lengths.

3.1.4 Type IV. Type IV scale shall be fully divided to 1,000 parts per foot on one edge and to 0.5 millimeters on the other edge. Scales shall be numbered at each tenth of a foot and at each centimeter. Type IV scale shall have the following shape: Two bevels, flat, same side (trapezoid). It shall be made of wood with plastic facings. Type IV scale shall be furnished in 12-inch nominal lengths.

3.1.5 Type V. Type V scale shall be direct numbered, with scale graduations open divided. Type V scale shall be divided in meters on both edges, graduated at 1:25,000 and 1:50,000. The scale ratio shall be marked as a representative fraction. In addition, the scale ratio may also be marked in words and figures. Type V scale shall have the following shape: Two bevels, flat, same side (trapezoid). It shall be made of wood with plastic facings. Type V scale shall be furnished in 30-centimeter nominal lengths.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

3.1.6 Type VI. Type VI scale shall be open divided, with four plotting and two drafting edges. All scales shall be numbered direct, with every 1,000th unit of plotting scales and every single unit of the drafting scales numbered. Plotting scales shall have 1,000 units and drafting scales one unit to the left of the zero mark. Plotting scales shall have every 500th unit graduated. The first edge shall be graduated in yards at 1:25,000, with 7,000 yards to the right of the zero. The two 500-yard intervals to the left of the zero shall be subdivided at 20-yard intervals, with each 100 yards emphasized and every 500 yards numbered from right to left. The second edge shall be graduated in inches, divided to half inches, with 11 inches to the right of the zero. The two half-inch intervals to the left of the zero shall be subdivided at 0.02-inch intervals, with each 0.1 emphasized. The third edge shall be graduated in meters at 1:50,000, with 14,000 to the right of the zero. The fourth edge shall be graduated in meters at 1:62,500, with 18,000 to the right of zero. On both third and fourth edges, the two 500 intervals to the left of the zero shall be subdivided at 50 intervals, with each 100 emphasized. The fifth edge shall be graduated in meters at 1:25,000, with 6,000 to the right of the zero. The two intervals to the left of the zero shall be subdivided at 20 intervals, with each 100 emphasized, and 500 meters and 1,000 meters numbered from right to left. The sixth edge shall be graduated in centimeters, with 29 cm to the right of the zero. The centimeter to the left of the zero shall be subdivided into millimeters, with each fifth millimeter emphasized. The graduations shall be placed so that as the scale is rolled over, the sequence shall be (1) yards, 1:25,000; (2) inches; and (3) meters, 1:50,000. Meters 1:62,500 shall be on the same side as (1), centimeters as (2), and meters 1:25,000 as (3). The scale ratio shall be marked as a representative fraction. In addition, the scale ratio may also be marked in words and figures. Type VI scale shall have the following shape: Six bevels, triangular, flat or regular. It shall be made of wood with plastic facings. Type VI scale shall be furnished in 12-inch nominal lengths. The scale shall be furnished with an artificial leather or heavy vinyl plastic sheath as specified in the contract or purchase order (see 7.3(c)).

3.1.7 Type VII. Type VII scale shall be fully divided, direct numbered, with one edge in the ratio of 1:10,000, and 1:20,000, reading to 3,000 and 6,000 meters respectively, double numbered at every 100 and 200 meters. The other edge shall be divided in the ratio of 1:50,000 reading to 15,000 meters, single number at every 1,000 meters. Type VII scale shall have the following shape: Two bevels, flat, same side (trapezoid). It shall be made of wood with plastic facings. Type VII scale shall be furnished in 30-centimeter nominal lengths.

3.1.8 Type VIII. Type VIII scale shall be fully divided in a ratio of 1:10,000 and 1:20,000, double numbered. One edge shall be graduated 5,500/11,000 yards and the other edge shall be graduated 5,000/10,000 meters. Minimum readings shall be 10/20 units, and each 250-/500-unit graduation shall be numbered. Type VIII scale shall have the following shape: Two bevels, flat, same side (trapezoid). It shall be made of wood with plastic facings. Type VIII scale shall be furnished in 50-centimeter nominal lengths.

3.2 Tests. All scales shall be visually evaluated for conformance to the specified type. The wood shall be visually inspected. It shall be free from imperfections such as chips, dents, or flaws.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

## 4. REGULATORY REQUIREMENTS

4.1 The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

## 5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product as that which the supplier offers for sale on the commercial market. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. With the exception of the markings, the offeror must currently sell scales of the identical construction (i.e. type and quality of wood and plastic, construction, accuracy, straightness, flatness, etc.) on the commercial market.

## 6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.3(d)).

## 7. NOTES

7.1 Part identification number (PIN). The following part identification numbering system is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-59269A.

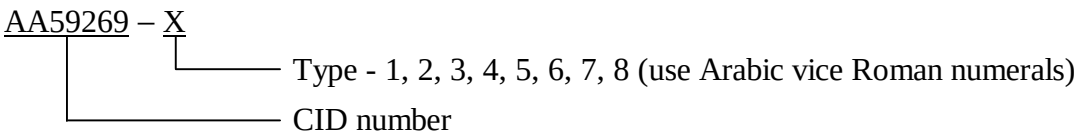


7.2 Sources of documents

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. Acquisition documents must specify the following information:

a. Title, number, and date of this document
b. The type of scale wanted (see 2)
c. Sheath material, type VI (see 3.1.6)
d. Packaging requirements (see 6.1)

7.4 Supersession information. This commercial item description supersedes: A-A-59269 of 30 June 1998, GG-S-161D of 1 May 1985, GG-S-161/1D of 1 May 1985, GG-S-161/4D of 1 May 1985, GG-S-161/5D of 1 May 1985, GG-S-161/7D of 1 May 1985, GG-S-161/8D of 1 May 1985, GG-S-161/10D of 1 May 1985.

7.5 Cross-reference of classification. Table I is a cross-reference table between the classification of GG-S-161/1D, GG-S-161/4D, GG-S-161/5D, GG-S-161/7D, GG-S-161/8D, and GG-S-161/10D, and this CID.

TABLE I. Cross-reference table.

| Federal Specification GG-S-161D | | | Commercial Item Description A-A-59269A |
|---|---|---|---|
| Specification sheet | Type | Style | Type |
| GG-S-161/1D | I | D | I |
| GG-S-161/1D | I | D | II |
| GG-S-161/4D | IV | B | III |
| GG-S-161/5D | V | A | IV |
| GG-S-161/7D | VII | C | V |
| GG-S-161/7D | VII | E | VI |
| GG-S-161/8D | VIII | A | VII |
| GG-S-161/10D | X | C | VIII |

MILITARY INTERESTS:

Custodians:
Air Force - 99
Army - CE
Navy - YD2

Reviewers:
Air Force - 82
Army - AR, CR, GL
Navy - CG, MC

CIVIL AGENCY
COORDINATING ACTIVITY:
GSA - FCGC

Preparing activity:
DLA - GS

(Project 6675-0135)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.