MIL-B-3434C
12 May 1981
SUPERSEDING
MIL-B-3434B
31 July 1974

MILITARY SPECIFICATION

BEATER, FOREST-FIRE

This specification is approved for use by all Departments and Agencies of of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a beater for manually extinguishing small fires.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-591	- Boxes, Shipping, Fiberboard, Wood-Cleated.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

FSC 4210

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/2963

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to Society of Automotive Engineers Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The beater shall consist of a wooden handle, a metal flail holder, and a flexible flail as shown in Figure 1 and as specified herein.

3.2 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

3.2.1 Handle. The handles shall be 1.375 to 1.500 inches in diameter, tapered in diameter for the depth of the steel ferrule. The handle shall be securely fastened to the steel ferrule.

3.2.2 Flail holder. The flail holder shall be 0.500 inch, halfround steel bars and shall consist of two sections - a holder and a bar. Both sections shall be punched or drilled to receive four 0.125-inch or 1.875-inch steel rivets. The holder section shall be welded to the steel ferrule, or the flail holder shall be 0.1875 by 0.750-inch steel bars, punched or drilled to receive four 0.125-inch to 0.1875-inch steel rivets, and welded to a 0.500-inch round shank. The handle shall be attached by forcing the shank into the end of the ferrule-reinforced handle and pinning or nailing the handle in position.

3.2.3 Flail. The flail shall be conveyor belting with rubber cover of nominal 0.0313 inch thickness, overall thickness 0.250 to 0.375 inch, with not less than one reinforcing ply of cotton duck or synthetic material. The flail shall be securely fastened between the holder and the bar with four 0.125-inch or 0.1875-inch steel rivets.

3.3 Identification marking. Each beater shall be identified in accordance with MIL-STD-130.

3.4 Treatment and painting. Metal parts of the beater shall be cleaned, treated and painted at the contractor's option.

3.5 Workmanship. The beater shall be clean, free from scale, smooth, round, straight, and of proper dimensions. Also, the beater shall be free from injurious grooving, indentations, racks, flaws, slivers, spilly metal, or other harmful defects which would interfere with use of the material in the application for which it is intended.

3.5.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

3.5.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter.

3.5.3 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined as specified in 4.4.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The beater shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

Major

101. Material not as specified.
102. Number of rivets not as specified.
103. Rivets not the size specified, loose in handle, heads not in full contact with member.
104. Workmanship not as specified.

Minor

201. Treatment and painting not as specified.
202. Identification marking missing, incomplete or illegible.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

105. Containers not as specified for Level A or Level B.
106. Strapping not as specified for Level A or Level B.
107. Weight of boxes exceed 200 pounds for Level A or Level B.
108. Fiberboard boxes not waterproof-sealed for Level B.
109. Marking missing, illegible, incorrect or incomplete.

5. PACKAGING

5.1 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.1.1 Level A. The beaters shall be packed in boxes conforming to PPP-B-601, Overseas Type, Grade B, or PPP-B-621, Class 2. Strapping of the boxes shall be in accordance with the applicable box specification appendix. The gross weight of each box shall not exceed 200 pounds.

5.1.2 Level B. The beaters shall be packed as specified in 5.1.1 for Level A, except the boxes shall be Domestic Type, or the beaters shall be packed in boxes conforming to PPP-B-591, Class II, or PPP-B-640, Class 2. The boxes shall be strapped in accordance with the appendix to the applicable box specification. Fiberboard boxes shall be waterproof-sealed with tape. The gross weight of each box shall not exceed 200 pounds.

Source: https://assist.dla.mil -- Downloaded: 20260-16T17:41Z
Check the source to verify that this is the current version before use.

5.1.3 Commercial. The beaters shall be packed in accordance with MIL-STD-1188.

5.2 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129 for military levels of protection. Marking for Commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The beater is intended for use in manually extinguishing small fires such as grass and brush fires, smouldering type fires, or any small fires where the use of a fire extinguisher would be impractical.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of packing required (see 5.1).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodians:
Army - ME
Air Force - 99


Review activity:
DLA - CS

User activity:
Navy - YD

Preparing activity:
Army - ME

Project 4210-0340

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

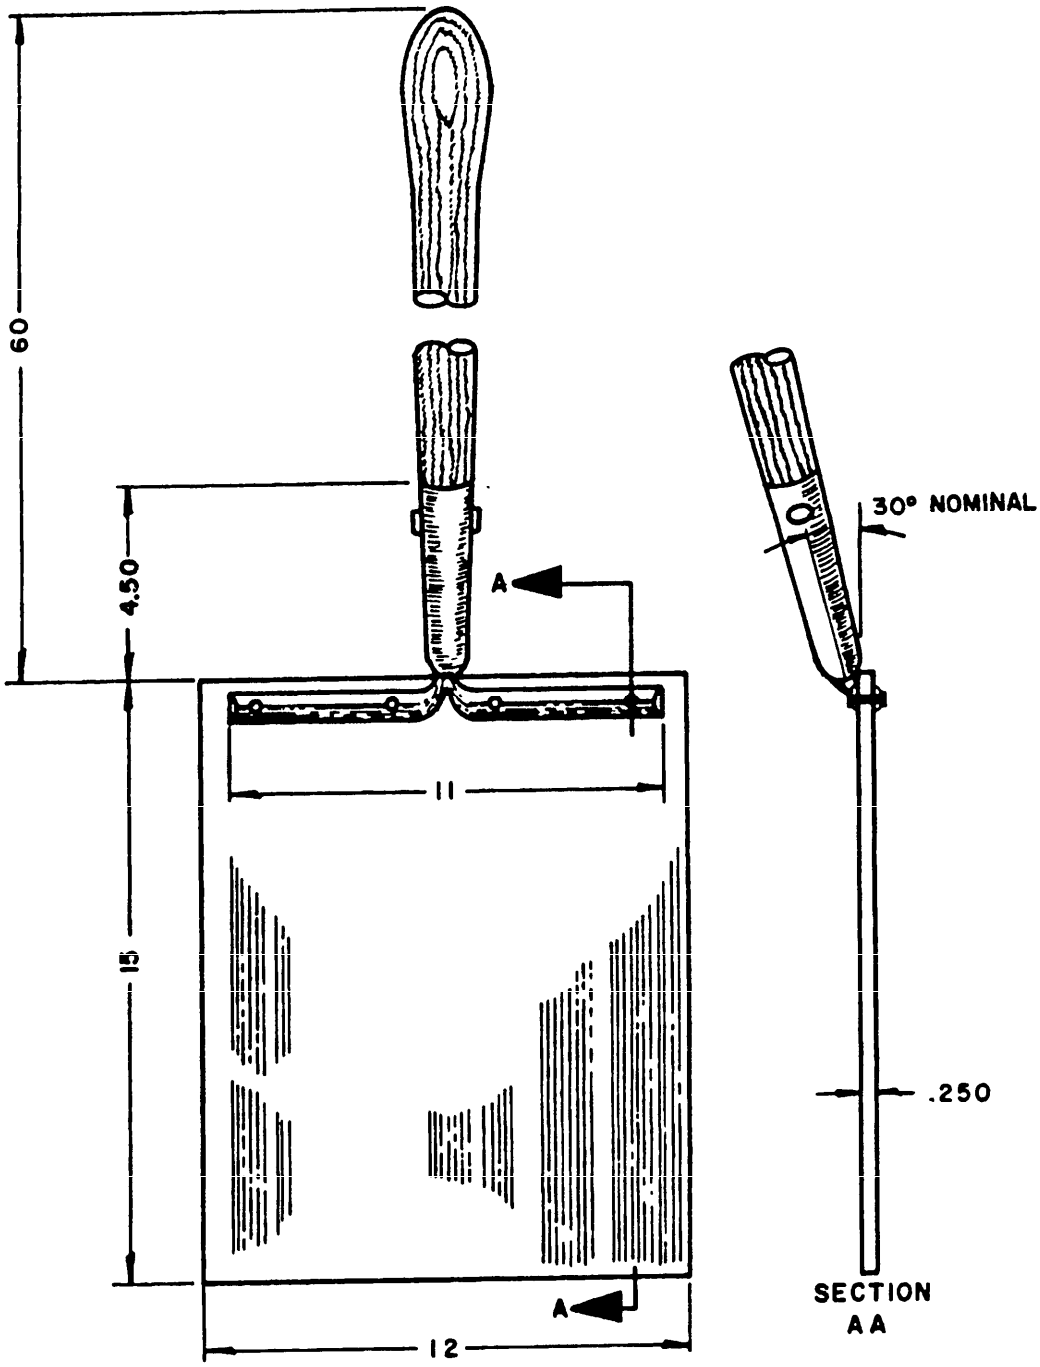

NOTE: UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN NOMINAL INCHES.

FIGURE 1. Beater, forest-fire.

X-2595A

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-B-3434C Beater, Forest-Fire

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.