MIL-F-3356C(ME)
27 April 1978
SUPERSEDING
MIL-F-3356B(ME)
16 March 1971

MILITARY SPECIFICATION

FLEXIBLE-SHAFT MACHINE, RAILWAY, GASOLINE- OR DIESEL-ENGINE-DRIVEN

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an air-cooled, gasoline- or diesel-engine-driven, railway, flexible-shaft machine.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-P-40	- Packaging and Packing of Hand Tools.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).

FSC 2230

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-E-10062	- Engines: Preparation for Shipment and Storage of.
MIL-M-18058	- Machinery, Metal and Wood-Working, Support Equipment and Associated Repair Parts, Preparation for Delivery of.

STANDARDS

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1410	- Methods for Selection of Industrial Engines for End Item Application.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Welding Qualifications, Section IX.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.
SAE J492 - Rivets and Riveting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

3. REQUIREMENTS

3.1 Description. The flexible-shaft machine shall be a gasoline- or diesel-engine-driven, portable unit to drive attachments for grinding railway rail. The machine shall be moved by one man over track on flanged rollers utilizing a stabilizer unit; and over ballast or other terrain by means of a single, rubber-tired wheel with the engine locked in transport position on the carriage. The hand-held grinder shall grind a finished surface to meet all railroad standard practices with the engine operating at continuous rated power. The flexible-shaft machine shall transmit power to a grinding wheel for indefinite periods with the flexible shaft in various 180-degree bend positions.

3.2 First article.

3.2.1 First-produced shaft. The contractor shall furnish a flexible-shaft machine for examination and test within the time frame specified to prove, prior to starting production, that his production methods and choice of design detail will produce flexible-shaft machines that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification. Used materials which have been reprocessed may be used provided the item in which they have been incorporated, or the material itself, meets all specifications. Unless protected against electrolytic corrosion, dissimilar metals, as defined in MIL-T-704 shall not be used in intimate contact with each other. Threaded parts shall be in accordance with SAE standards and Handbook H28. Maximum practicable use shall be made of interchangeable hardware and fastening devices. All breathers for lubricant and fluid sumps, and similar openings on the flexible-shaft machine shall prevent the entrance of airborne water and airborne dust (see 6.4).

3.4 Environmental and use requirements. The environmental and use requirements shall be as specified herein.

3.4.1 Operating temperature. Unless otherwise specified herein, the flexible-shaft machine shall start and operate in any ambient temperatures from minus 25° F to plus 120° F (32° C to plus 49° C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

3.5 Safety. The safety characteristics of the flexible-shaft machine shall meet the following minimum requirements:

(a) All belts, gears, shafts, pulleys, sprockets, spindles, flywheels, chains, and other reciprocating, rotating, or moving parts of equipment shall be guarded when such parts are exposed to contact by personnel or otherwise create a hazard.

3.6 Ease of maintenance. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement without the removal of other major assemblies and installed attachments.

3.7 Overall dimensions and weight. The overall dimensions and weight of the railway flexible-shaft machine in wheelbarrow position shall not exceed the following:

Overall length	90 inches (2290 mm) (Nominal)
Overall width	26 inches (660 mm) (Nominal)
Overall height	30 inches (760 mm) (Nominal)
Weight	320 pounds (145 kg) (Nominal)

3.8 Carriage. The carriage shall be the metal wheelbarrow type equipped with a pneumatic-tired transporting wheel for off-track movement and with flanged rollers for movement on track. The engine and drive shall be mounted on a swivel plate in a manner that the assembly may be rotated 360 degrees without binding. Supports shall be provided to secure the attachments when the flexible-shaft machine is being transported.

3.9 Engine. For the purpose of selecting the engine, the flexible shaft machine shall be classified as a Class I end item in accordance with MIL-STD-1410. The engine, including all systems, components, and accessories, shall conform to MIL-STD-1410, unless otherwise specified herein. All engine accessories shall be furnished by or approved by the engine manufacturer. The engine shall be capable of operating on fuels and lubricating oils as specified in MIL-STD-1410. The engine shall meet all operational requirements and conditions specified in Table I of MIL-STD-1410, or, the engine manufacturer's recommended operating limits.

3.10 Power transmission. The flexible-shaft machine shall be equipped with either a ball-bearing-mounted clutch or a hydrodynamic drive unit.

3.10.1 Clutch. A ball-bearing-mounted clutch located between the engine and flexible shaft shall be furnished. The manufacturer's rating of the clutch shall be no less than 150 percent of the maximum torque developed by the engine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

3.10.2 Hydrodynamic drive unit. The hydrodynamic drive unit (torque converter or fluid coupling) shall be of commercial design and shall be matched to the power and speed of the engine furnished as specified herein. The hydrodynamic drive unit and its installation shall be in accordance with the drive unit manufacturer's recommendations. The hydrodynamic drive unit shall be located within the power train such that, when engine speed is at the maximum governed rpm, the speed of the hydrodynamic drive unit shall be not less than 80 percent of the engine speed with the flexible shaft unloaded. When specified, a hydrodynamic drive unit only shall be supplied.

3.11 Grinding wheels. Unless otherwise specified, two high-speed, abrasive, grinding wheels 8-inch (203-mm) diameter by 1-inch (25-mm) thick straight type and 8- by 2- by 2-inch (203- by 51- by 51-mm) wall cup type shall be furnished.

3.12 Wheel guards. Wheel guards with handles shall be furnished for both the straight- and cup-type grinding wheels, when specified. Guards shall be mounted so as to maintain proper alinement with the wheel and have sufficient strength to minimize displacement in the event of wheel breakage. The maximum angular exposure of the abrasive wheel periphery shall be not greater than 180 degrees, and the top half of the wheel shall be guarded at all times.

3.13 Hand pieces. One straight and one right-angle hand piece shall be furnished. The hand pieces shall be connectable to the wheel guards and the surface-grinding attachment without the use of tools. The hand pieces shall have quick-detachable connectors and shall be equipped with ball bearings enclosed against dust and dirt.

3.14 Surface-grinding attachment. The surface-grinding attachment shall be a metal carriage-type frame fitted with flanged rollers and shall be adjustable to assure proper cutting angle and movement of the cup wheel with provisions for mounting the right-angle hand piece (see 3.13). The surface-grinding attachment shall be such that one man can roll the attachment back and forth along and over the rail surface being ground while the attachment is simultaneously being rocked across the rail to grind the desired surface contour.

3.15 Stabilizer. The adjustable stabilizer shall be fastened to the flexible-shaft machine and ride on one or more rollers on the opposite rail.

3.16 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

3.16.1 Lubricants. The flexible-shaft machine shall operate as specified herein when lubricated with designated lubricants.

3.16.2 Lubrication fittings. Lubrication fittings, when used, shall be located in a protected position and shall be accessible to a grease gun equipped with a hydraulic coupler and a 10-inch (254-mm) (approx) flexible extension.

3.16.3 Pressure-release device. A pressure-release device shall be provided where the use of pressure lubricating equipment could damage grease seals or other parts.

3.16.4 Enclosures with integral reservoir of lubricant. Enclosures such as gearcases and transmission housings that contain a reservoir of lubricants for the lubrication of the parts enclosed shall be equipped with dipsticks, check plugs, or sight gage to determine the level of the lubricant. Each enclosure shall be equipped with a means for filling the enclosure with a lubricant and for draining.

3.16.5 Lubrication service.

3.16.5.1 Grease lubrication. Bearing lubrication, including sealed bearings, shall be with greases as recommended by manufacturer. The flexible-shaft machine shall be run-in (broken-in) and delivered with these greases. A tag shall be attached in a conspicuous place to indicate which grease has been used.

3.16.5.2 Oil lubrication. Unless otherwise preserved for packaging (see 5.1), all components shall be filled to the operating level with winter grades of oils as designated by the manufacturer for use in the temperature range of 0° F to 32° F (0° C to 0° C). A tag shall be attached in a conspicuous place to indicate the temperature ranges and grades of lubricants used.

3.17 Fungus and moisture resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of moisture and fungus growth by an overall treatment with a varnish conforming to MIL-V-173 with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish:

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush or a combination of both to give a minimum dry-film thickness of 0.001-inch (0.0254-mm) component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.18 Identification marking. The flexible-shaft machine shall be identified in accordance with MIL-STD-130. Identification plates shall conform to MIL-P-514, Type I, Style 1, Composition C, of Type I, Grade A, Class 1 material or Commercial Type. Plates shall be attached by screws, bolts, or rivets in a conspicuous protected location.

3.19 Instruction plates. The flexible-shaft machine shall be equipped with instruction plates, suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be standard Commercial Type, and shall be attached in the same manner.

3.20 Treatment and painting. The portions of the flexible-shaft machine and its components and parts normally painted shall be cleaned, treated, and painted in accordance with standard commercial practice.

3.21 Repair parts and maintenance tools. Such repair parts and maintenance tools as are specified shall be furnished.

3.22 Items to be furnished with flexible-shaft machine. No shipment of flexible-shaft machines shall be made unless repair parts, maintenance tools, operating tools, and accessories are included with the shipment or unless approval for shipment of the flexible-shaft machines without such items has been received from the contracting officer.

3.23 Toolbox. The flexible-shaft machine shall be provided with a weatherproof toolbox made of steel. When the toolbox is mounted on the flexible-shaft machine, the toolbox lid shall open to at least 90 degrees from the closed position. The lid shall remain in the fully open position either by its own weight or by holding devices. A hasp which will accommodate a lock conforming to standard key-operated padlock shall be provided for locking the toolbox. The toolbox shall be fastened to the flexible-shaft machine in a protected position. A drain hole shall be provided in the bottom of the toolbox. The toolbox shall be of a size to hold the operating and maintenance tools and repair parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

3.24 Workmanship. All parts, components, and assemblies of the flexible-shaft machine including castings, forgings, molded parts, stampings, bearings, seals, machined surfaces, and welded parts shall be clean and free from sand, dirt, fins, pits, sprues, scale, flux, and other harmful, extraneous material. External surfaces shall be free from burrs, sharp edges, and corners except when sharp edges and corners are required.

3.24.1 Steel fabrication. Steel used in the fabrication of the flexible-shaft machine shall provide original quality surface finish and shall be free from kinks and sharp bends. Steel having an eroded surface is not acceptable. The forming of material shall be done by methods that will not cause damage to the metal. Shearing and chipping shall be done neatly and accurately. Corners shall be square and true. Burned surfaces of flame-cut material shall be free of slag. Precautions shall be taken to avoid overheating, and heated metals should be allowed to cool slowly except where heat treatment is required. All bends of a major character shall be made with metal dies or fixtures to insure uniformity of size and shape.

3.24.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First-produced inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

4.3 First-produced inspection.

4.3.1 Examination. The machine shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The machine shall be tested as specified in 4.5.2. Failure of a test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each machine shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each machine shall be tested as specified in 4.5.2.5. Failure to pass this test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. Each machine shall be examined for the characteristics listed in Table I.

4.5.2 Tests.

4.5.2.1 Test conditions. Prior to test the flexible-shaft machine shall be lubricated with oils and greases specified in 3.16. Oils shall be those designated for use in the ambient temperature at which the test is being performed. During all tests, the engine shall be governed at a speed not greater than the continuous rated speed as established by the engine manufacturer.

4.5.2.2 Flexible shaft operational test. The flexible-shaft machine shall be operated with the flexible shaft in the 180-degree-bend position for 4 operations using the straight-type grinding wheel (see 3.11) and guard (see 3.12) without a load being applied to the grinding wheel. The radius of curvature shall be as shown in Figure 1. The bend shall be made between midpoint of the flexible shaft and the free end. The direction of the bend shall be reversed for each operation. Any malfunction or breakage shall constitute failure of this test.

4.5.2.3 Grinding test. Following the flexible shaft operational test and without adjustment to the flexible-shaft machine, the grinding wheel shall remove material from one complete welded joint of rail or steel plate. Inability to complete the test and to obtain a ground finish shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

4.5.2.4 Performance test. The performance test shall be performed by one man and shall consist of the following tests.

4.5.2.4.1 Stability test. The flexible-shaft machine shall be mounted on a section of railroad track and shall be rolled a distance of 30 feet (9144 mm). The stabilizer shall be adjusted on opposite rail. Instability indicated by the outer roller raising off the rail when mounted on track shall constitute failure of the test.

4.5.2.4.2 Position test. With the engine in operation, the engine and drive assembly shall be rotated 360 degrees on the carriage frame by means of extending the flexible shaft to its full length and circling the machine (see 3.8). The swivel plate shall then be rotated and stopped at four separate positions 90 degrees apart. In each position, the clutch control lever shall be used to start and stop the grinding wheel (see 3.10.1.1). Binding of the engine and drive assembly on the swivel plate, inability to complete the test, or nonpositive engaging and disengaging of the drive from the engine shall constitute failure of the test.

4.5.2.4.3 Mobility test. The engine shall be locked in transport position on the carriage. The flexible-shaft machine shall then be moved in wheelbarrow position a distance of 100 feet (30 m) over ballast by rolling on the pneumatic tire. Inability to move the flexible-shaft machine the required distance shall constitute failure of the test.

4.5.2.5 Operational test. Each flexible-shaft machine shall be operated for not less than 5 minutes with the surface-grinding attachment engaged (see 3.14). Malfunction of any part or nonconformance to 3.15 shall constitute failure of this test.

4.5.2.6 Clutch test. The grinding wheel shall be removed and the flexible shaft shall be secured in such a manner to prevent rotation of the shaft. The clutch shall engage when engine is accelerated and disengage when the engine returns to an idling speed. Stalling of the engine or failure of the clutch shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the characteristics listed in Table II. Presence of one or more defects shall be cause for rejection.

Table I. Examination Schedule

Number	Characteristics	Requirement Paragraph
101.	Material not as specified.	3.3
102.	Safety not as specified.	3.5
103.	The overall dimensions and weight of the railway flexible-shaft machine in wheelbarrow position not as specified.	3.7
104.	Carriage not as specified.	3.8
105.	Engine not as specified.	3.9
106.	Power transmission not as specified.	3.10
107.	Clutch not as specified.	3.10.1
108.	Hydrodynamic drive unit not as specified.	3.10.2
109.	Grinding wheels not as specified.	3.11
110.	Wheel guards not as specified.	3.12
111.	Hand pieces not as specified.	3.13
112.	Surface-grinding attachment not as specified.	3.14
113.	Stabilizer not as specified.	3.15
114.	Means for lubricating surfaces requiring lubrication not furnished as specified.	3.16
115.	Lubricants not as specified.	3.16.1
116.	Lubrication fittings not as specified.	3.16.2
117.	Pressure-release device not as specified.	3.16.3
118.	Enclosures with integral reservoir of lubrication not as specified.	3.16.4
119.	Grease lubrication not as specified.	3.16.5.1
120.	Oil lubrication not as specified.	3.16.5.2
121.	Instruction plates not as specified.	3.19
122.	Repair parts, maintenance tools, operating tools and accessories not furnished with shipment.	3.22
123.	Steel fabrication not as specified.	3.24.1
124.	Welding not as specified.	3.24.2
125.	Surfaces of parts to be welded not cleaned as specified.	3.24.2
126.	Identification marking not in accordance with MIL-STD-130.	3.18
127.	Treatment and painting not as specified.	3.20

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

Table I. Examination Schedule (Cont'd)

Number	Characteristics	Requirement Paragraph
128.	Repair parts and maintenance tools not furnished as specified.	3.21
129.	Toolbox not as specified.	3.23
130.	Workmanship not as specified.	3.24

Table II. Examination Schedule

Number	Characteristics	Requirement Paragraph
131.	Preservation and packaging not Level A or Commercial as specified (see 6.2).	5.1
132.	The flexible-shaft machine with repair parts and maintenance tools not preserved and packed for Level A in accordance with MIL-M-18058.	5.1.1
133.	The engine and engine accessories not preserved and packed for Level A in accordance with MIL-E-10062.	5.1.1.1
134.	The engine and engine accessories not preserved and packed for commercial in accordance with MIL-E-10062.	5.1.2.1
135.	Repair parts not preserved and packed for commercial as specified.	5.1.2.2
136.	Maintenance tools not preserved and packed for commercial in accordance with the Level A requirements of PPP-P-40.	5.1.2.3
137.	The remaining components not preserved and packed for commercial as specified.	5.1.2.4
138.	Marking for both military and commercial level packaging not as specified.	5.2

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. The flexible-shaft machine with repair parts and maintenance tools shall be preserved in accordance with the Level A requirements of MIL-M-18058, and the following additional requirements.

5.1.1.1 Engine. The engine and engine accressories shall be preserved in accordance with MIL-E-10062 as specified for Type II, Method I.

5.1.2 Level C.

5.1.2.1 Engine. The fuel system, combustion chambers and valves and when applicable, the cooling system shall be preserved in accordance with MIL-E-10062 as specified for Type II, Level A, Method I.

5.1.2.2 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts.

5.1.2.3 Maintenance tools. Maintenance tools shall be preserved in accordance with the Level A requirements of PPP-P-40.

5.1.2.4 Other components. Other components of the flexible-shaft machine, not specifically mentioned herein, shall be preserved in a manner to provide protection against deterioration and damage from the contractor to the initial destination.

5.2 Packing. Each complete flexible-shaft machine, preserved as specified in 5.1 shall be packed in accordance with MIL-M-18058. The degree of packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3 Marking. In addition to any special markings required by the contract, each shipment shall be marked in accordance with the requirements of MIL-M-18058.

6. NOTES

6.1 Intended use. The railway flexible-shaft machine is intended for use in maintenance of railways in operations such as surfacing joints, switches, and crossings; removing flow at switch points and stock rails; and grinding frogs, flanges, and crossings.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced model (see 3.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

(c) Whether gasoline or diesel engine is required (see 3.9).
(d) When hydrodynamic drive is required (see 3.10.2).
(e) Type of grinding wheels if other than as specified in 3.11.
(f) When wheel guards are required (see 3.12).
(g) Applicable list of repair parts and maintenance tools (see 3.21).
(h) Degree of preservation and degree of packing required (see 5.1 and 5.2).

6.3 First-produced flexible shaft. Any changes or deviations of production flexible-shaft machines from the approved first-produced model during production will be subject to the approval of the contracting officer. Approval of the first-produced model will not relieve the contractor of his obligation to furnish flexible-shaft machines conforming to this specification.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).


Custodian:
Army - ME

Preparing activity:
Army - ME


Review activity:
DLA - CS

Project 2230-A042


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

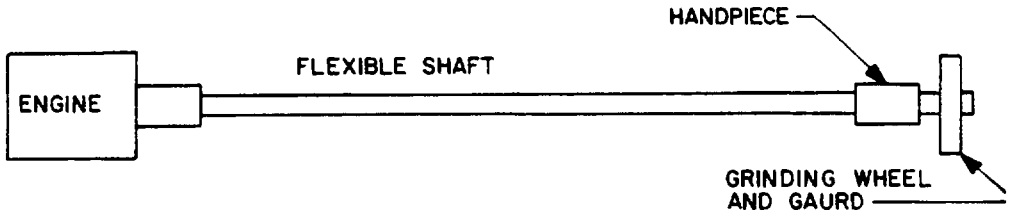

VIEW A – BLOCK DIAGRAM OF RAILWAY FLEXIBLE SHAFT MACHINE SHOWING MAJOR COMPONENTS.

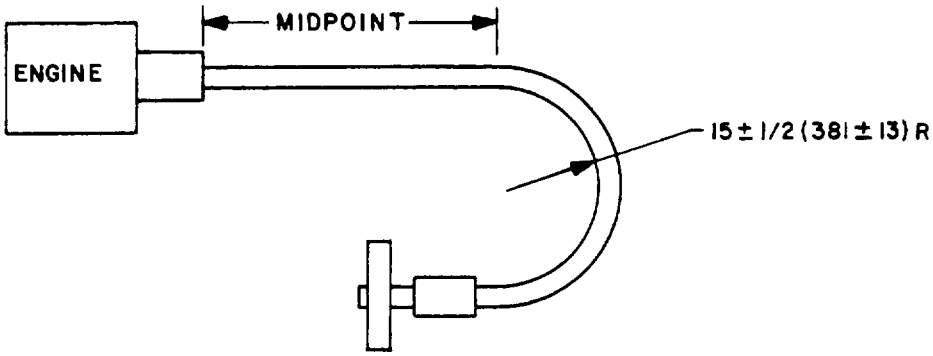

VIEW B – TEST SET-UP FOR PORTION OF ENDURANCE AND SAMPLE TESTS

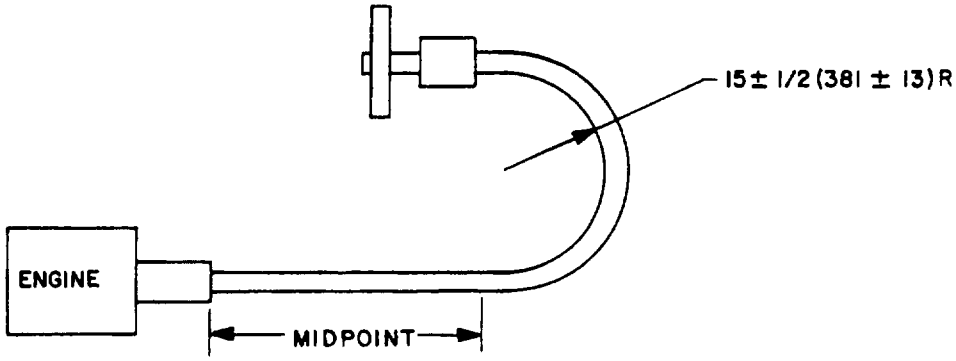

VIEW C – TEST SET-UP FOR PORTION OF ENDURANCE AND SAMPLE TESTS

NOTE: DIMENSIONS ARE IN INCHES (MILLIMETERS).

FIGURE 1. Flexible shaft machine.

X-2020B

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-F-3356C(ME) Flexible-Shaft Machine, Railway, Gasoline- or Diesel-Engine-Driven

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:33Z
Check the source to verify that this is the current version before use.