5 November 1975
SUPERSEDING
MIL-S-3443C
21 October 1968

MILITARY SPECIFICATION

SHOTGUN, 12 GAGE, RIOT-TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types and classes of manually operated, slide action, hammerless, 12 gage riot-type shotguns.

1.2 Classification. Shotguns covered by this specification shall be of the following types and classes (see 3.2.1 and 6.2).

Type I - With bayonet band assembly and sling.
Class 1 - Take-down frame.
Class 2 - Solid frame.
Type II - With sling only.
Class 1 - Take-down frame.
Class 2 - Solid frame.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal	
P-D-680	- Dry Cleaning Solvent
QQ-A-200/11	- Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire Extruded, 7075
QQ-A-367	- Aluminum Alloy Forging

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

TT-L-215	- Linseed Oil, Raw (For Use In Organic Coatings)
VV-L-800	- Lubricating Oil, General Purpose, Preservative, (Water-Displacing, Low Temperature)
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triplewall
PPP-T-76	- Tape, Pressure-Sensitive, Adhesive Paper (for Carton Sealing)

Military

MIL-M-14	- Molding Plastics and Molded Plastic Parts, Thermosetting
MIL-P-116	- Preservation-Packaging, Methods of
MIL-B-117	- Bag, Sleeve and Tubing - Interior Packaging
MIL-C-372	- Cleaning Compound, Solvent (for Bore of Small Arms and Automatic Aircraft Weapons)
MIL-P-3420	- Packaging Materials, Volatile Corrosion Inhibitor, Treated, Opaque
MIL-C-5501/9	- Caps and Plugs, Protective Dust and Moisture Seal (Cap, Tubing)
MIL-I-8574	- Inhibitor, Corrosion, Volatile, Utilization of
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-F-13088	- Finish, Protective, Tung (Chinawood) Oil Base (for Wooden Components of Small Arms)
MIL-W-13855	- Weapons, Small Arms and Aircraft Armament Subsystems, General Specification For
MIL-C-13924	- Coating, Oxide, Black, for Ferrous Metals
MIL-P-14232	- Parts, Equipment and Tools for Army Materiel, Packaging and Packing of
MIL-P-16232	- Phosphate Coating, Heavy, Manganese or Zinc Base (For Ferrous Metals)
MIL-I-45607	- Inspection Equipment, Acquistion, Maintenance and Disposition of

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD No. 101- Test Method -Preservation, Packaging and Packing Materials: Test Procedures
FED-STD No. 356- Commercial Packaging of Supplies and Equipment
FED-STD No. 595- Colors

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners or Pallet Type Base
MIL-STD-171 - Finishing of Metal and Wood Surfaces
MIL-STD-417 - Rubber Composition, Vulcanized, General Purpose, Solid (Symbols and Tests)
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods

DRAWINGS

Rock Island Arsenal

B7265933 - Bag, Barrier, W/VCI Treated Liners
B7266299 - Tube, Bore, VCI Treated
C11686409 - Shotgun, 12 Gage, Riot Type

(Product drawings referenced in this specification form a part of Drawing C11686409.)

PUBLICATIONS

Rock Island Arsenal

Packaging Data Sheets

P7265706 - Scabbard, Bayonet, M1917
P11686400 - Bayonet: M1917

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 20261O-16T17:41Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Aerospace Material Specification

AMS 2469 - Process and Performance Requirements for Hard Coating Treatment of Aluminum Alloys

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., Two Pennsylvania Plaza, New York, NY 10001.)

American National Standards Institute Inc.

ANSI B46.1 - Surface Texture

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

Sporting Arms and Ammunition Manufacturer's Institute

S. A. A. M. I. Technical Committee Manual Vol. IV, Shotshell

(Applications for copies should be addressed to the Sporting Arms and Ammunition Manufacturer's Institute, 420 Lexington Avenue, New York, NY 10017.)

3. REQUIREMENTS

3.1 Bid samples.

3.1.1 Each bidder shall furnish three bid sample shotguns of the design he proposes to supply, for test and evaluation for determination of compliance with this specification (see 4.4). Shotguns shall be representative of the latest commercially available design of each manufacturer modified as necessary to meet this specification. Unless otherwise specified (see 6.2), bid sample shotguns shall be prepared for delivery in accordance with 5.1 and shall be forwarded to a test and evaluation agency specified by the procuring activity. One of the three bid samples shall be considered the pilot pack (see 5.1). Along with the submitted bid sample, each bidder shall indicate the nomenclature and model identification designation used by the manufacturer to identify the shotgun as a riot-type shotgun which meets the requirements of this specification. The bayonet band assembly sling and sling swivel assembly are not required to be furnished by the contractor with the bid sample shotguns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

3.1.2 Upon award of the contract, samples submitted by the successful bidder and approved by the evaluation and test agency will be retained for use by the contractor and the Government as inspection standards. These standards shall apply to all characteristics for which definite requirements are not prescribed.

3.1.3 For continuation orders when bid sample may not be required, the contractor shall furnish manufacturing models and provide the Government representative with inspection and test records attesting that the items furnished are physically and functionally equivalent to the bid samples which were approved by the Government on prior contract.

3.2 Materials, construction, and design. Shotguns shall conform to the materials, construction, and design requirements specified herein. Parts and surfaces subject to rolling or sliding contact shall be of sufficient hardness to resist wear. Staked or dovetailed members shall have sufficient temper to retain their original fit after extended use. Screws, when firmly tightened, shall not cause binding of any of the mechanism. External pins shall be secured in position by detent or retainer approved by the procuring activity. When aluminum is used in the manufacture of receivers, the aluminum shall be an aluminum alloy, composition 7075 conforming to QQ-A-367 or QQ-A-200/11 temper T6 or T6510. The contractor shall furnish a list of essential repair parts based on the maintenance of the shotgun over a period of 10,000 rounds of firing.

3.2.1 Type I, Type II and Class 1, Class 2 Shotguns.

3.2.1.1 Type I shotgun. The Type I shotgun shall conform to Drawing C11686409. The Type I shotgun shall include the bayonet band assembly and a sling (see 1.2).

3.2.1.2 Type II shotgun. The Type II shotgun shall be same as Type I shotgun with sling only, less the bayonet band assembly (see 1.2).

3.2.1.3 Class 1 frame. The Class 1 frame shall be of the takedown type which is so constructed, that the barrel can easily be removed from the receiver for cleaning without the use of tools and without removing the stock (see 1.2).

3.2.1.4 Class 2 frame. The Class 2 frame shall be of the solid type which is so constructed, that the barrel is not easily removed from the receiver without the use of tools (see 1.2).

3.2.1.5 General characteristics. General characteristics of Type I and Type II shotguns shall be in accordance with Table I.

Source: https://assist.dla.mil -- Downloaded: 20261010-16T17:41Z
Check the source to verify that this is the current version before use.

TABLE I

General Characteristics

Weight-Type I	8.5 pounds (nominal)
Weight-Type II	6.5 pounds (nominal)
Length of barrel	20 inches (nominal)
Gauge of bore	12
Boring of barrel	Cylinder
Chambered for shell length	2.75 inches
Operation	Manual
Type of action	Slide
Feed	Tubular magazine
Ammunition capacity of weapon (including one in chamber)	5 shells minimum
Type of firing mechanism	Hammerless
Type of stock	Shoulder stock with pistol grip
Force to operate safety	3 pounds minimum to 6 pounds maximum
Trigger pull	3.5 to 8 pounds

3.2.2 Human Engineering Characteristics. In addition to meeting the design requirements specified herein, shotguns shall meet with the approval of the bid sample evaluation and test agency (see 3.1) for human engineering characteristics such as size, shape and balance deemed essential for guard, riot control and combat purposes.

3.2.2.1 Size.

3.2.2.1.1 Type I. The overall length of Type I shotgun including bayonet band assembly shall be from 39 to 44 inches.

3.2.2.1.2 Type II. The overall length of Type II shotgun without the bayonet band assembly shall be from 39 to 42 inches.

3.2.2.2 Shape. The stock shall have a drop of not less than 1 1/4 inches or more than 1 3/4 inches at the comb and not less than 2 1/4 inches or more than 2 3/4 inches at the heel. Measurements for drop shall be made from a line extending from the highest point of the barrel at the muzzle through the highest point of the receiver.

3.2.2.3 Trigger pull length. The length of pull (distance from the trigger to the butt of the stock measured parallel to the centerline of the bore), shall not be less than 13 3/4 inches and not more than 14 1/4 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

3.2.4 Balance. The center of balance of the shotgun without the bayonet band assembly shall be 4 to 7 inches forward of the trigger.

3.2.3 Safe fire control. The shotgun shall incorporate a safe fire control feature which shall prevent releasing the firing mechanism when the slide action is operated with the trigger depressed. It shall not be possible to actuate the firing mechanism until the breech bolt is in the locked position.

3.2.4 Safety device. A positive safety device shall be provided which, when set at the safe position, shall prevent firing of the shotgun. It shall be moveable manually between the safe position and the fire position and shall remain in the position set until reset manually. The safety device shall withstand 200 actuations during the 3,000 round endurance firing (see 3.3.5), and meet the force requirements specified in Table I.

3.2.5 Slide and breech bolt action. When the slide action is pulled rearward, it shall cause the breech bolt to open for extraction and ejection of the fired shell. When the slide action is returned to the forward position, it shall cause the breech bolt to chamber the next round and lock in the battery position. When the design of the shotgun employs the use of an aluminum receiver, the breech bolt shall lock directly to the barrel or barrel extension. When the breech bolt is in the battery position, the slide action shall not be capable of being moved rearward by manual operation. However, an unlocking device shall be provided which can be manually operated to allow the slide action to be manually pulled rearward for the purpose of extracting and ejecting an unfired shell from the chamber. After the trigger has been pulled, the slide action shall be capable of being pulled rearward without operating the unlocking device. Testing shall be as specified in 4.5.3.1.

3.2.6 Barrel.

3.2.6.1 Barrel Type I. The barrel for Type I shotguns shall be in accordance with Figure 1 to provide for mounting of the bayonet band assembly.

3.2.6.2 Barrel Type II. The barrel for Type II shotguns shall be a commercial 20 inch barrel except that the protective finish shall be in accordance with 3.2.12.2.

3.2.7 Bayonet band assembly. Type I shotguns shall be equipped with a bayonet band assembly conforming to Drawing C11686389. After assembly of the bayonet band assembly to the barrel with the three screws, the adapter stop shoulder shall be flush with the end of the barrel and the bayonet band assembly shall not be capable of being rotated. Assembly of the screws shall not cause bulging in the bore of the barrel (see Figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

3.2.8 Breech bolt. The breech bolt shall move freely through its full range of travel without binding.

3.2.9 Sling swivel assembly and sling.

3.2.9.1 Butt stock sling swivel assembly. Shotguns shall be equipped with a butt stock sling swivel assembly conforming to Drawing B6147721, and shall be attached to the butt stock in accordance with Figure 2. There shall be no relative movement of the swivel plate. After assembly, the sling swivel shall swivel freely 180 degrees.

3.2.9.2 Front sling swivel. Type II shotguns shall be equipped with a front sling swivel on or forward of the magazine end cap that will accept the shotgun sling and be acceptable to the procuring activity.

3.2.9.3 Sling. Unless otherwise specified (see 6.2), shotguns shall be equipped with a sling conforming to Drawing B8448770.

3.2.10 Stock and fore-end.

3.2.10.1 Material. The stock and fore-end shall be of walnut (black) or birch (yellow or sweet). The grains shall be straight and in the longitudinal direction of the stock. Slight deviations in grain, small knots in the butt of the stock, slight sap streaks, small checks and small cracks shall not be cause for rejection provided they do not cause weakness, particularly in a thin section. Small checks, cracks, and knotholes shall be filled with plastic fillers or other suitable material approved by the procuring agency. Stocks shall be of solid construction except where otherwise necessary in inletting to the receiver. Stocks shall not be of a design where internal wood material is removed solely for the purpose of weight reduction.

3.2.10.2 Color. The stock and fore-end shall have a nonbleeding color which shall be no lighter than color standard 11018988-W (walnut) or 11018988-B (birch), as applicable (see 6.3). Black walnut sapwood and birch may be stained prior to the protective finish treatment.

3.2.10.3 Protective finish compound. The stock and fore-end shall be treated with tung (chinawood) oil base protective finish compound conforming to MIL-F-13088, raw linseed oil conforming to TT-L-215, or other suitable finish approved by the procuring agency.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

3.2.10.4 Butt plate or recoil pad. The stock of the shotgun shall be equipped with either a recoil pad or a butt plate which shall be fastened securely to the stock and shall match the contour of the stock within .015 inch. The screws attaching the recoil pad shall bottom securely on the steel plate of the pad. The screws for attaching the butt plate shall be flush to 1/16 inch below the surface of the plate. The screws attaching the recoil pad or butt plate shall provide a minimum engagement in the stock of one inch.

3.2.10.4.1 Butt plate. The material for the molded plastic butt plate shall conform to type CFI-20 of MIL-M-14 or as otherwise approved by the procuring activity. The butt plate shall have a suitable non-slip area molded on the shoulder surface. The color of the butt plate shall be brown, 20045 to 20140, or black, 27038 or 37038 to 37056, in accordance with Fed. Std. No. 595.

3.2.10.4.2 Recoil pad. Material for the recoil pad shall conform to type S, class SC, grade 415, A_1, B_1, C_1, F_2, K_1, Z_1, Z_2, of MIL-STD-417. Special requirements for suffix Z_1 and Z_2 are as follows:

a. Z_1 - Change in tensile strength after 30 days over water at 158° ± 2°F shall be minus 30% maximum.
b. Z_2 - No cracks shall be visible under 7X magnification after 30 days exposure in a relative humidity cabinet in which the circulating air is controlled to 100 ± 1°F and 90 ± 2% relative humidity. The color of the pad shall be brown, 30045 to 30140 or black, 37038 to 37056, in accordance with Fed. Std. No. 595. The hardness of the pad shall be within a Shore A Durometer reading of 35 ± 5. A suitable carbon steel plate shall be molded within the recoil pad to provide for fastening it to the stock. The exterior surfaces of the pad shall be solid without cushioning cavities and shall show no evidence of the internal metal plate. Plugs for the screw holes shall be provided of the same material as the recoil pad. They They shall be designed to provide retention in the recoil pad by the resilient action of the rubber, and after assembly and bottoming on the screw head, shall be flush to 1/16 inch below the surface of the pad.

3.2.11 Trigger guard. The trigger guard shall be of metal construction and shall have sufficient strength to prevent manual deflection of the bow to cause actuation of the firing mechanism or permanent deformation of the bow.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

3.2.12 Finishes

3.2.12.1 Machine finish. Machine finishes shall be in accordance with commercial practice for the type of shotgun furnished. Inspection standards (see 3.1.2) shall be used as standards for machine finishes for production shotguns. In the event of a dispute over the comparison of finishes of the inspection standards and the production shotguns, referee comparison shall be in accordance with ANSI B46.1.

3.2.12.2 Final protective finish. Unless otherwise specified (see 6.2), the final finish of the exterior of metal parts shall be in accordance with the applicable finishes listed below. Inspection standards shall be used as standards for final protective finishes for production shotguns.

Material	Finish
Steel (other than corrosion-resisting steel)	5.3.1.2 or 5.3.2.2** of MIL-STD-171
Corrosion-resisting steel	3.3.2 or 3.3.3 of MIL-STD-171
Aluminum and aluminum alloys	7.1.2 or 7.2.2 (dyed black) or 7.5* of MIL-STD-171 or MIL-A-8625, Type III class 1 or 2. Color of finished parts shall be lusterless uniform dark grey or black.

*The following provisions shall apply to finish number 7.5:

a. Thickness of coating shall be 0.001 + 0.0002 inch

b. In lieu of the abrasion and wear resistance test specified in AMS 2469, resistance to wear may be determined by other suitable means as approved by the procuring activity.

**Finish number 5.3.2.2 shall not be used on steel parts that are subjected to rolling or sliding contact.

3.2.12.3 Touchup material. Exterior surfaces on metal components which are bright or without finish after assembly operations, such as the surfaces of rivets, pins, screw heads, staking marks and the like may be refinished using materials and procedures in accordance with the touchup procedures of MIL-W-13855.

3.3 Performance characteristics.

3.3.1 Trigger pull. The trigger pull shall be within range specified in Table I. Testing shall be as specified in 4.5.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

3.3.2 High-pressure resistance. Shotguns shall withstand the firing of one high-pressure cartridge containing the Sporting Arms and Ammunition Manufacturer's Institute (SAAMI) standard proof load of 170 to 190 Copper Units of Pressure (CUP) with no evidence of cracks, seams and other injurious defects. After proof firing the headspace shall be 0.0576 inch minimum to 0.0716 inch maximum. Headspace readings shall be taken from the bolt face forward to an 0.850 inch datum diameter. Testing shall be as specified in 4.5.3.1.

3.3.3 Functioning. Shotguns shall fire five shells using standard velocity commercial 12 gauge, 2 3/4 inch, 00 buckshot (9 pellets) maximum load cartridges conforming to SAAMI standards, without malfunctions, unserviceable parts, punctured or ruptured primers or shell cases, loose stock or screws or other unacceptable conditions. Malfunctions attributable to defective ammunition shall not be counted against the shotgun being tested, however, such malfunctions shall be recorded. When a shell is fired and the action slide handle or fore-end is not held, the breech bolt may move rearward to the extent that ejection occurs. However, ejection shall not equal or exceed in force that experienced under rapid or forceful manual ejection. There shall be no bulged, split or rim cut cartridge cases, or injury to the weapon (i.e., damage to extractor, ejector, etc). Testing shall be as specified in 4.5.3.1.

3.3.4 Targeting and Accuracy (Pattern). At a range of 40 yards (plus or minus one foot) aim shall be taken on a pattern sheet not less than 40 nor more than 60 inches square. The shot pattern shall be such that not less than 33 1/3 percent of the shot pellets shall be within or cut the edge of a 30 inch diameter circle for accuracy (pattern), drawn entirely on the pattern sheet so as to enclose the most shot. Five patterns shall be fired from each gun and the average must be as specified. The guns shall be hand held during firing, or mounted in a fixture that simulates hand firing. Ammunition shall be as specified in paragraph 3.3.3. Testing shall be as specified in 4.5.3.2.

3.3.5 Endurance. Shotguns shall be capable of withstanding the firing of 3,000 rounds with no malfunctions, unserviceable parts or nonacceptable conditions, using standard commercial 12 gauge, 2 3/4 inch, 00 buckshot (9 pellets), maximum load shells. Testing shall be as specified in 4.5.3.in 4.5.3.3.

3.4 Interchangeability. Unless otherwise specified (see 6.2), all repair parts contained on the list furnished by the contractor (see 3.2), shall be interchangeable. Testing shall be as specified in 4.5.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

3.5 Model number identification. The contractor shall identify models of weapons with positive identification. If in previous commercial or military production the manufacturer identified a weapon model with a certain designation and intends incorporation of a component or assembly change which would affect functional characteristics, reliability, safety or interchangeability, the contracting officer should be notified. Such changes may or may not require a new model designation. Upon request from the contracting officer, the contractor shall apply a new model number identification to the new procurement.

3.6 Handbook of instructions. A handbook of instructions for cleaning and maintenance and a parts list shall be provided with each shotgun.

3.7 Marking. Marking of shotguns shall be in accordance with MIL-W-13855. Each shotgun shall be identified by serial numbers assigned by the procuring activity (see 6.2). Each shotgun shall be marked with the following:

a. Manufacturer's name.
b. Serial number (on the receiver).
c. Gauge and length of shell.
d. Model number identification.
e. "U.S." (mark on the receiver near the serial number).

3.8 Workmanship. Workmanship shall be in accordance with MIL-W-13855 and the inspection standards.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all the inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. Bid sample inspection (see 4.4).
b. Quality conformance (production shotguns) inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

4.4 Bid sample inspection.

4.4.1 Examination. Each bid sample shall be examined in accordance with Table II.

TABLE II

Examination

Examination	Requirement Paragraph
Material, Design, and Construction	3.2, 3.2.10.1 3.2.10.4.1, 3.2.10.4.2
Type I shotgun	3.2.1.1
Type II shotgun	3.2.1.2
Class 1 Frame	3.2.1.3
Class 2 Frame	3.2.1.4
General characteristics	3.2.1.5 and Table I
Human Engineering Characteristics	3.2.2, 3.2.2.1, 3.2.2.2, 3.2.2.3, 3.2.2.4
Slide and breech bolt action	3.2.5
Barrel	3.2.6
Type I	3.2.6.1
Type II	3.2.6.2
Breech Bolt	3.2.8
Stock and fore-end	3.2.10
Material	3.2.10.1
Color	3.2.10.2
Protective finish compound	3.2.10.3
Butt plate or recoil pad	3.2.10.4, 3.2.10.4.1, 3.2.10.4.2
Trigger guard	3.2.11
Finish	3.2.12
Machine	3.2.12.1
Final protective	3.2.12.2
Touch-up material	3.2.12.3
Marking	3.7
Workmanship	3.8

4.4.2 Tests. Testing of bid sample shotguns shall be performed by the Government and shall consist of the quality conformance tests specified in 4.5.3.1 and 4.5.3.2. If found satisfactory in examination and tests specified in 4.5.3.1 and 4.5.3.2, each bid sample shotgun shall be subjected to the endurance test specified in 4.5.3.3.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T17:41Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Inspection lot. The formation, size and presentation of inspection lots of shotguns and packaging shall be in accordance with MIL-STD-105. Inspection lots shall be as large as practicable, in consideration of quality history, manufacturing conditions, contractors delivery schedule, and within the limits of MIL-W-13855.

4.5.2 Examination.

4.5.2.1 Type I Shotguns. Prior to assembly of the bayonet band assembly and sling assembly, the barrel and stock of Type I shotguns and stock of Type II shotgun shall be examined in accordance with the following classification of defects and acceptable quality levels.

Classification of Defects

Barrel Categories	Defect	AQL	Inspection Method	Dimension
Critical	None defined			
Major	None defined			
Minor				
201	Length, location of screw grooves	1.5	SME	1.760 ± .005
202	Distance between center of screw holes	1.5	SME	1.515 ± .005
203	Diameter, bayonet band bearing	1.5	SME	.884 - .002
204	Length, bayonet band bearing	1.5	SME	4.000 Min length
205	Depth, screw grooves	1.5	SME	.402 - .004
206	Concentricity, .884 diam. and barrel bore	1.5	SME	.008 TIR
207	Workmanship (see para 3.8)	4.0	Visual	---

Stock Categories	Defect	AQL	Inspection Method	Dimension
Critical	None defined			
Major	None defined			
Minor				
201	Distance between center of screw holes	1.5	SME	1.110 ± .005
202	Diameter, screw holes	1.5	SME	.156 + .010 (2 holes)
203	Workmanship (see para 3.8)	4.0	Visual	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

Note: The following terms, definitions and instructions shall apply:

a. The AQL's are specified as percent defective.
b. The AQL's specified apply to each characteristic and not to a group.
c. Where SME (Standard Measuring Equipment) is specified as the method of inspection, the supplier may use any type of commercial standard measuring equipment or special inspection equipment which has been approved by the Government representative.

4.5.2.2 Type I and Type II Shotguns. Each assembled shotgun shall be examined as specified in paragraph 4.4.1 and Table II. Type I shotguns shall be examined for compliance with 3.2.7 and 3.2.9. The bayonet band assembly and sling swivel assembly shall have been acceptance inspected by the contractor prior to assembly to the shotgun. Samples (see 3.1.2) shall be utilized as comparison standards. Type I and Type II shotguns shall be examined for compliance with 3.2.1.3 and 3.2.1.4.

4.5.3 Testing.

4.5.3.1 Trigger pull, high-pressure resistance, slide and breech bolt action, and functioning testing. Each shotgun shall be tested for trigger pull (see 3.3.1), high-pressure resistance (see 3.3.2), slide and breech bolt action (see 3.2.5), and functioning (see 3.3.3) in accordance with the test methods specified in 4.6.1, 4.6.2, 4.6.3. Failure of a shotgun to pass any of the tests shall be cause for rejection of the shotgun.

4.5.3.2 Targeting and accuracy (Pattern). A sample of at least five percent of each inspection lot of shotguns shall be tested for targeting and accuracy (pattern) using the test method specified in 4.6.4. This test may be performed concurrently with the functioning test. Failure of any shotgun to meet the requirement shall be cause for rejection of the represented lot subject to retest or reconditioning and further test as a reconditioned lot. A retest of another sample of 10 percent from the same lot shall be made without reconditioning the represented lot, unless in the opinion of the Government representative the failure indicates serious defects in the item, in which case retest shall be made only if authorized by the procuring agency. Failure of any shotgun in the retest to meet the requirement shall be cause for rejection of the represented lot subject to reconditioning and further testing as a reconditioned lot. Prior to submission of a lot of shotguns as a reconditioned lot, the cause of failure shall be determined and contractor correction shall be effected on all shotguns in the lot. Sample size and test method for reconditioned lots shall be the same as for retest.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

4.5.3.3 Endurance testing. One shotgun selected from each inspection lot, shall be tested for endurance requirements (see 3.3.5) using the test method specified in 4.6.5. Failure of the shotgun to meet the requirements shall be cause for rejection of the represented lot. An unserviceable part is one that causes malfunction or impairs the safety of the weapon. Malfunctions attributable to ammunition shall not be counted against the shotgun tested, however, such malfunctions shall be recorded.

4.5.3.4 Interchangeability testing. A sample of ten shotguns from each inspection lot shall be tested for interchangeability of repair parts using the test method specified in 4.6.6. Shotguns taken for interchangeability testing shall have been found satisfactory in all other examinations and tests. Hand refinement of parts will be allowed on not more than four shotguns during interchange of parts provided that no part is thereby rendered unsuitable for assembly in other shotguns. After assembly, the shotguns shall be tested for functioning using the test method specified in 4.6.3. Failure of the interchange test shall be cause for retest or rejection of the represented lot. An interchangeability retest may be allowed without reconditioning the lot of shotguns. Failure in the retest shall be cause for rejection of the represented lot subject to reconditioning and further test as a reconditioned lot. A sample of 20 shotguns from each retest or reconditioned lot shall be tested using the same procedure described above except that hand refinement will be allowed on not more than eight shotguns.

4.5.3.5 Certification. The supplier shall be responsible for the testing necessary to accomplish certification. Unless otherwise specified the supplier shall provide the Government representative with certified statements of compliance with applicable drawings, specifications, and standards for the following materials and processes for each inspection lot of shotguns.

a. Protective finish compound - For each day's production of wooden stocks and fore-end, furnish a certified statement of compliance with 3.2.10.3 and MIL-F-13088.
b. Phosphate coating - For each day's production of each protective finish processing tank or each inspection lot, the contractor shall provide the Government representative with a certified report of the accelerated corrosion test on three samples and a statement of compliance with applicable finish requirements of 3.2.12.2 herein, MIL-P-16232, and the applicable provisions of MIL-W-13855. The "Springfield immersion test" (see MIL-P-16232) is authorized for use for accelerated corrosion testing of phosphate coated parts. In lieu of certification, where practicable, the Government representative may witness performance of accelerated corrosion tests. Failure of any sample shall cause rejection of the represented lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

c. Black oxide coating - For each day's production from each processing tank, furnish a certified statement of compliance with 3.2.12.2 herein, MIL-C-13924, and the applicable provisions of MIL-W-13855 (spot test not required).
d. Supplementary oil per VV-L-800.
e. Anodic coating - For each day's production from each processing tank, furnish a certified statement of compliance with 3.2.12.2 and MIL-A-8625.
f. Touchup material per 3.2.12.3.

4.5.3.5.1 Materials. Tests required by applicable drawings and specifications shall be performed on materials used in the manufacture of shotguns. The contractor shall furnish the Government representative certified test reports of all tests required for each lot of each material used. The contractor shall also furnish certification that the materials used in packaging conform to the applicable specifications.

4.5.4 Inspection equipment. Unless otherwise specified in procurement documents (see 6.2), responsibilities for acquisition, calibration, maintenance, and disposition of acceptance inspection equipment shall be in accordance with MIL-I-45607.

4.5.5 Packaging examination and testing. Unless otherwise specified (see 6.2), the packaging examination and testing shall be in accordance with MIL-P-14232.

4.6 Test methods.

4.6.1 Trigger pull test. Shotguns shall be tested for trigger pull requirement (see 3.3.1) at both the minimum and maximum limits using a Government approved measuring device. The shotgun shall be cocked and the safety shall be in the fire position. The load shall be gradually applied to the center of the trigger and exerted in a line parallel to the axis of the bore.

4.6.2 High-pressure resistance test. Shotguns shall be tested for high-pressure resistance requirement (see 3.3.2) by firing one high-pressure test shell in each shotgun. After firing, shotguns shall be visually examined for cracks, deformations, and other evidence of damage and shell cases shall be visually examined for bulges, splits, rings, and other defects caused by defective barrels. Headspace shall be checked using inspection equipment in accordance with Drawing D7314899 or an approved equal measuring device.

4.6.3 Functioning test. Shotguns shall be tested for functioning requirement (see 3.3.3) by hand functioning and function firing. In performing this test, all shells shall be fed from the magazine. Prior to firing, five dummy shells shall be chambered, extracted, and ejected

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

by hand operation on the slide without pulling the trigger. Shotguns shall then be function fired by firing at least five rounds. All five shells shall be fed from the magazine. Moving the slide entirely to the rear shall extract the shell from the chamber and eject it freely and completely out of the receiver. Returning the slide action forward to the closed position shall feed the next shell into the chamber. Thrusting the slide forward sharply by hand in chambering shall not fire the shell. The safe fire control feature shall be checked for compliance with 3.2.3. The safety device shall be actuated and firing attempted to check safe position (see 3.2.4) including actuating force (see Table I).

4.6.4 Targeting and accuracy (pattern) test. Shotguns shall be tested for targeting and accuracy (pattern) requirement (see 3.3.4) at a range of 40 yards plus and minus one foot. The pattern sheet shall be not less than 40 nor more than 60 inches square. Aim shall be taken on the pattern sheet. Five shots shall be fired at five different pattern sheets (one shot per target). A 30 inch circle, entirely on the pattern sheet, shall be superimposed over the maximum density of the shot holes of each target. The shot holes within the 30 inch circle of each target shall be counted and the average of the five targets shall be used to determine whether the pattern requirements have been met.

4.6.5 Endurance test. Shotguns shall be tested for endurance requirement (see 3.3.5) by firing 3,000 rounds of ammunition. Shotguns shall be lubricated prior to testing and may be cleaned and lubricated periodically or at the close of the day's firing. Disposition of endurance tested shotguns shall be as specified in the contract (see 6.2).

4.6.6 Interchangeability test. Shotguns shall be tested for interchangeability of repair parts (see 3.4) by disassembling the parts and placing parts of each kind in the same container. The ten shotguns shall then be reassembled using repair parts taken at random from each container.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack shall consist of a shotgun (type I or II as applicable) packaged in accordance with the requirements specified herein and for the level of protection specified in the contract (see 6.2) packed level B and forwarded in accordance with 3.1.

5.2 Preservation and packaging. The shotguns shall be preserved and packaged in accordance with the requirements specified herein and for the level of protection specified in the contract (see 6.2). Materials, methods, processes and procedures specified herein shall conform to the requirements of MIL-P-116 and MIL-P-14232.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.

5.2.1.1 Cleaning. The shotgun shall be disassembled as necessary to accomplish cleaning. All metallic surfaces of the shotgun shall be cleaned by process C-3. Surfaces of parts subjected to burned powder residues such as the bore and chamber shall be scrubbed clean with bristle brushes saturated with rifle bore cleaner conforming to MIL-C-372 followed by a wash of solvent conforming to P-D-680. Non-metallic parts and the sling shall be cleaned by process C-1.

5.2.1.2 Drying. All cleaned surfaces shall be dried prior to preservative application. Drying shall be accomplished in accordance with procedure D-1 except that barrel bores and chambers shall be dried in accordance with procedure D-4 using clean, dry lint-free swabs.

5.2.1.3 Preservative application.

5.2.1.3.1 Oil application. Supplementary oils or lubricants contaminated or removed during the cleaning process shall be reapplied in accordance with the applicable drawing requirements or as specified in 3.2.12.2.

5.2.1.3.2 Volatile corrosion inhibitor (VCI) application. All sharp corners and projections of the shotgun, capable of abrading or puncturing the barrier bag, shall be cushioned with VCI treated material conforming to type I, class 1, style C or D of MIL-P-3420, or molded plastic caps conforming to MIL-C-5501/9, size as required. A VCI treated bore tube, conforming to drawing B7266299, part no. 7267767, shall be inserted into the bore of the barrel. The protruding end of the VCI tube shall be bent over the outside of the muzzle end. Unless otherwise specified herein, the procedures for use and applications of VCI treated materials shall conform to the requirements of MIL-I-8574.

5.2.1.4 Unit packaging. Each shotgun with sling, and basic issue items as applicable, shall be unit packaged method IA-8 and as specified herein. Due to dimensional variations (see 3.2.2.1), the bag size specified on drawing B7265933 shall be adjusted to adequately inclose the shotgun while providing sufficient material to permit one additional heat seal on the end of the bag.

5.2.1.4.1 Type I shotguns (with basic issue items M1917 bayonet and M1917 bayonet scabbard). Each shotgun, preserved in accordance with 5.2.1.3, shall be packaged in the barrier bag specified in 5.2.1.4. The included air volume within the bag shall be reduced to a practicable minimum prior to closure by heat sealing. The sling shall be packaged method III. Fold the sling flat and insert into a bag conforming to

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

type I, class B, style 2 of MIL-B-117, size 4" x 10" I. D. The M1917 bayonet scabbard shall be unit packaged in accordance with packaging data sheet P7265706 and the M1917 bayonet shall be unit packaged in accordance with packaging data sheet P11686400. Each shotgun, together with the sling, bayonet and scabbard shall be placed in a fiberboard box conforming to PPP-B-636, class WR. The box shall be equipped with inner pads, cells, forms or sheets designed to pass the drop test specified in Fed. Test Method Std. No. 101, method 5007, procedure B. The box shall be closed in accordance with PPP-B-636.

5.2.1.4.2 Type II shotguns (without basic issue items). Type II shotguns shall be packaged as specified in 5.2.1.4.1 with the exception that the packaging requirements for the M1917 bayonet and M1917 bayonet scabbard shall be deleted.

5.2.2 Level B.

5.2.2.1 Cleaning, drying, and preservative application. Cleaning, drying, and preservative application shall be in accordance with the requirements of 5.2.1.1, 5.2.1.2 and 5.2.1.3.

5.2.2.2 Unit packaging. Each shotgun with sling and basic issue items as applicable shall be unit packaged method I as specified herein.

5.2.2.2.1 Type I shotguns. Each shotgun shall be preserved and unit packaged the same as specified for level A (see 5.2.1.3 and 5.2.1.4.1) with the following exceptions: Delete the barrier bag and completely wrap the shotgun with VCI treated material conforming to type I, class 1, style C of MIL-P-3420. The fiberboard box shall be closed with 2 inch wide tape conforming to PPP-T-76 in lieu of closure in accordance with PPP-B-636. The sling and basic issue items shall be packaged the same as specified for level A.

5.2.2.2.1.2 Type II shotguns. Each shotgun and sling shall be preserved and unit packaged as specified in 5.2.2.2.1.

5.2.3 Commercial packaging. Commercial packaging shall be in accordance with Fed. Std. No. 356.

5.3 Packing. A uniform quantity of unit packaged shotguns shall be packed in a minimum size shipping container conforming to the applicable specification or standard for level A, B or commercial (see 5.3.1, 5.3.2 or 5.2.3). The maximum allowable tolerance for void shall not exceed 1/2 inch in any dimension (length, width and depth). Closure and reinforcement shall be in accordance with the requirements of the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

5.3.1 Level A. PPP-B-601, overseas type, style A, B, I or J, grade B or PPP-B-621, style 2 or 4, class 2.

5.3.2 Level B. Unit container shall be palletized in accordance with the applicable requirements of MIL-STD-147 except that commercial expendable pallets may be used in lieu of those specified.

5.3.3 Commercial packing. Commercial packing shall be in accordance with Fed. Std. No. 356.

5.3.4 Odd quantities. When uniform quantities cannot be maintained, then the size of the shipping container or palletized load shall be adjusted to obtain minimum cube. As required, void areas of shipping containers shall be blocked and braced in accordance with MIL-STD-1186.

5.4 Marking.

5.4.1 Military levels. Marking of unit packages and exterior shipping containers shall be in accordance with the applicable requirements of MIL-STD-129 and as specified herein. Packing lists and serial number marking is required.

5.4.1.1 Concealed identification marking. Concealed identification marking is required for all levels of packing for shipments. The following markings shall be deleted from the outside of the exterior shipping container; federal stock number, federal item name, list of serial numbers and packing list.

5.4.2 Commercial. Marking of commercial unit packages and exterior shipping containers shall be in accordance with Fed. Std. No. 356.

6. NOTES

6.1 Intended use. The shotguns furnished to this specification are intended for Military guard duty, riot control and combat.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type and class required (see 1.2 and 3.2.1).
c. Exception to requirements of bid samples, if any (see 3.1).
d. Level of packaging and packing of bid sample shotguns, if different (see 3.1).
e. Shipping instructions for bid samples (see 3.1).
f. Slings, if different (see 3.2.9.3).
g. Final protective finish, if other than specified (see 3.2.12.2).

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

h. Interchangeability of repair parts if other than specified (see 3.4).
i. Block of serial numbers (see 3.7).
j. Level of packaging and packing (see Section 5).
k. Responsibilities for furnishing acceptance inspection equipment, if other than specified (see 4.5.4).
l. Disposition instructions for endurance tested shotguns and bid sample shotguns (see 4.6.5).
m. Packaging examination and testing, if different (see 4.5.5).

6.3 Color standards for stocks may be obtained from Commander, Rock Island Arsenal, ATTN: SARRI-QM, Rock Island, IL 61201.

Custodians:
Army - WC
Navy - OS
Air Force - 84

Review activities:
Army - WC
Navy - OS
Air Force - 84

User activity:
Navy - MC

Preparing activity:
Army - WC

Project number:
1005-0548

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:41Z
Check the source to verify that this is the current version before use.

THE SHOTGUN BARREL OUTSIDE DIAMETER CONTOUR FOR THE APPLICABLE LENGTH (APPROXIMATELY 15 INCHES) SHALL BE COMPATIBLE WITH THE MATING HAND GUARD AND ADAPTER OF THE BAYONET BAND ASSEMBLY. THE BARREL CONTOUR SHALL BE CONSISTENT WITH THE DIMENSIONAL REQUIREMENTS FOR THE ASSEMBLY AS DESCRIBED ON DRAWING C11686389, SUCH THAT WITH THE BARREL MUZZLE BEARING AGAINST THE FORWARD INTERNAL SHOULDER OF THE ADAPTER, DRAWING D11686388, THE SCREWS, DRAWING NUMBER D6284554, SHALL ENGAGE THE MATING SLOTS IN THE BARREL. WITH THE SCREWS ENGAGED, THE FLANGE AT THE REAR AND THE TWO CENTER PROJECTIONS OF THE HAND GUARD, DRAWING D5621103, SHALL BEAR ON THE BARREL.

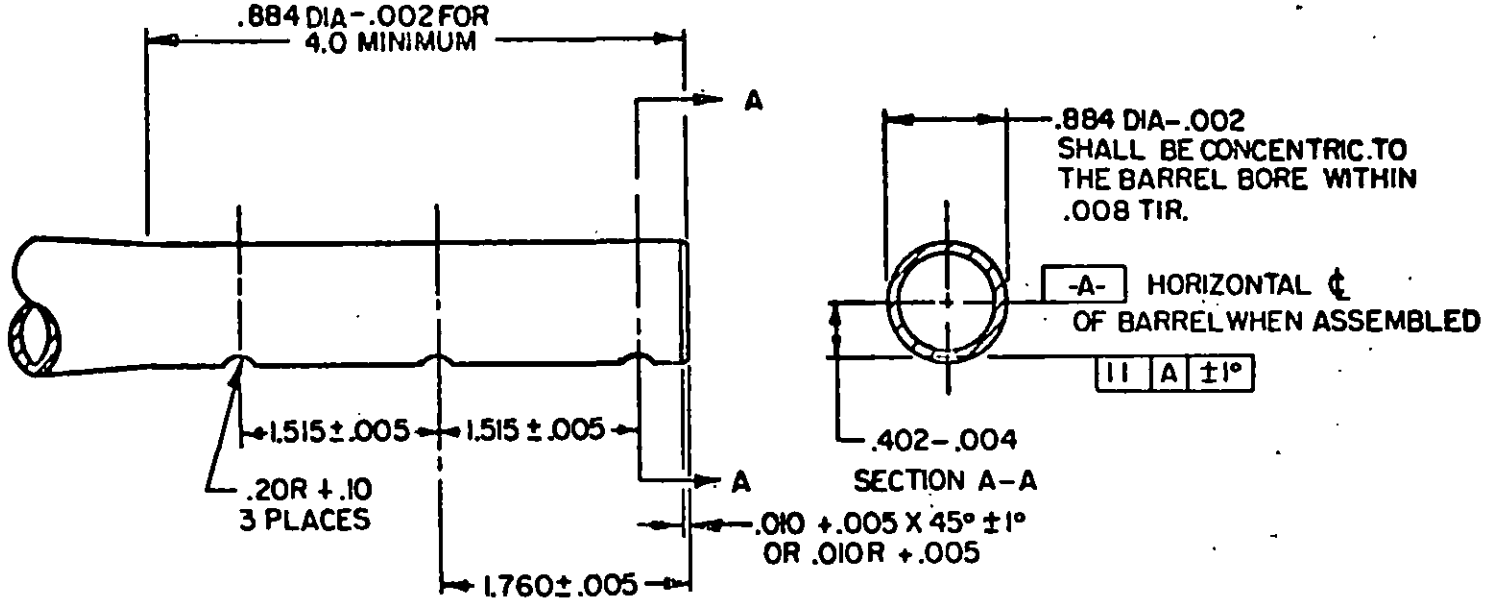


FIGURE 1
BARREL DETAIL
(SHOTGUN, 12GAGE, RIOT TYPE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

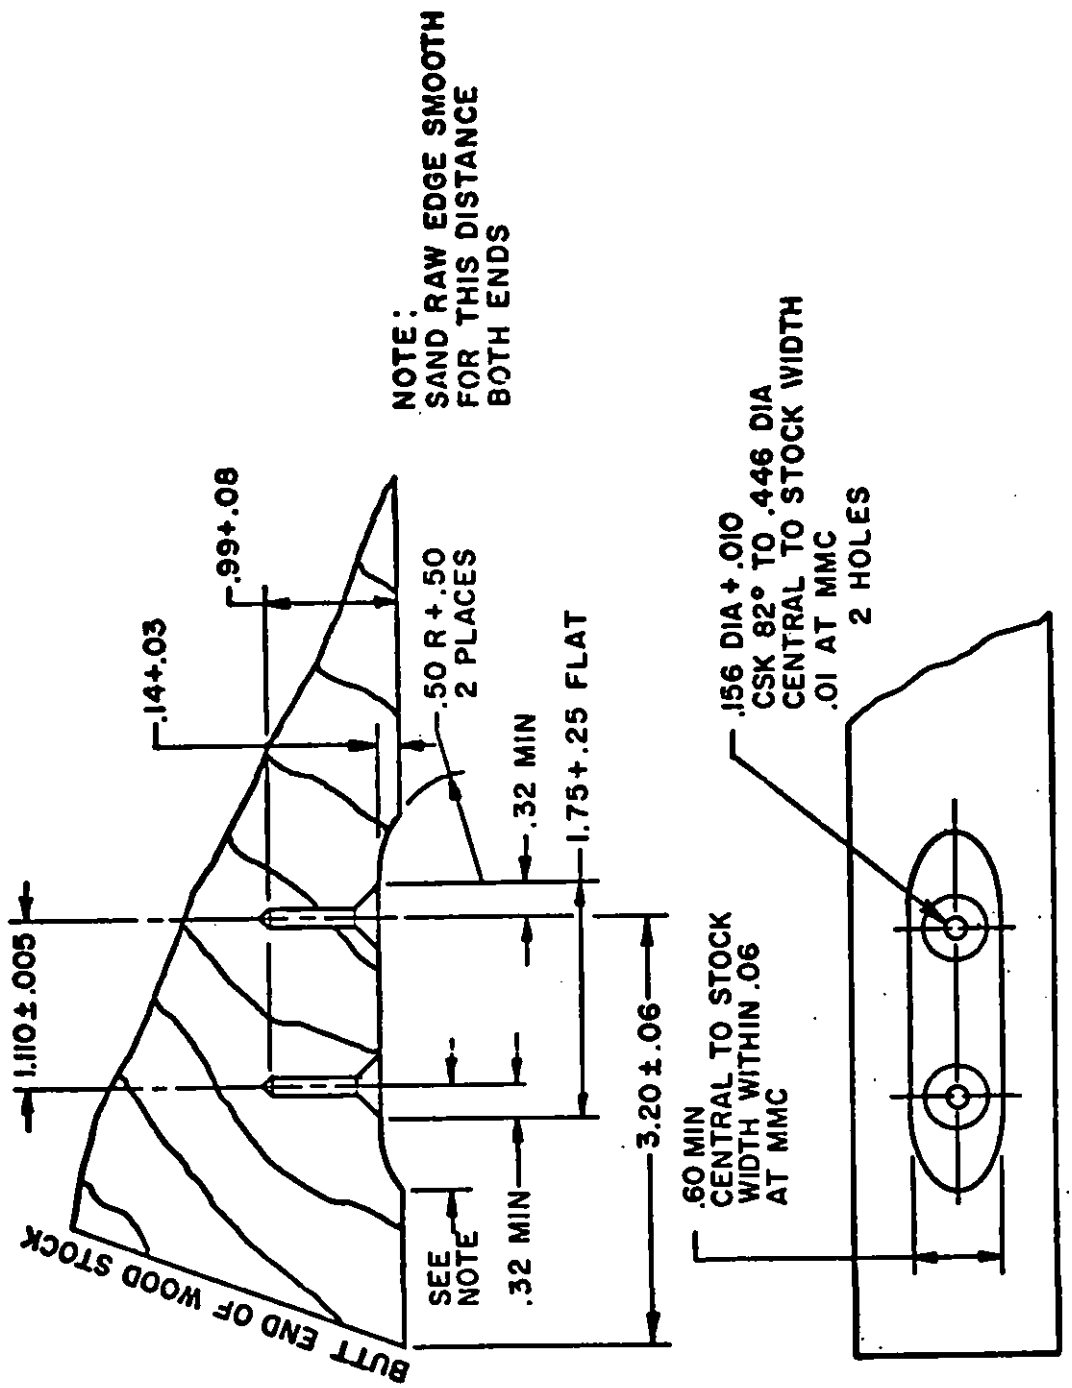


FIGURE 2
STOCK SWIVEL CUT
(SHOTGUN, 12 GAGE, RIOT TYPE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-3443D; Shotgun, 12 Gage, Riot-Type

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-01-16 17:41:12
Check the source to verify that this is the current version before use.