MILITARY SPECIFICATION SHEET

SLEEVE, TERMINATION, ELECTRICAL, LOW TEMPERATURE, FLUXED SOLDER PREFORM, HEAT SHRINKABLE

The sleeve shall also conform to MIL-S-83519/1.

The complete requirements for procuring the termination sleeve described herein shall consist of this document and the issue in effect of MIL-K-81786(AS).

(1) INSULATION SLEEVE:

Heat-shrinkable, radiation-crosslinked, poly (vinylidene fluoride), natural.

(2) FLUXED SOLDER PREFORM:

Solder: 51.2% tin; 30.6% lead; 18.2% cadmium

Flux: Non-corrosive activated rosin in accordance with MIL-F-14256.

(3) MELTABLE INSERTS:

Thermally stablized thermoplastic. Color, Blue

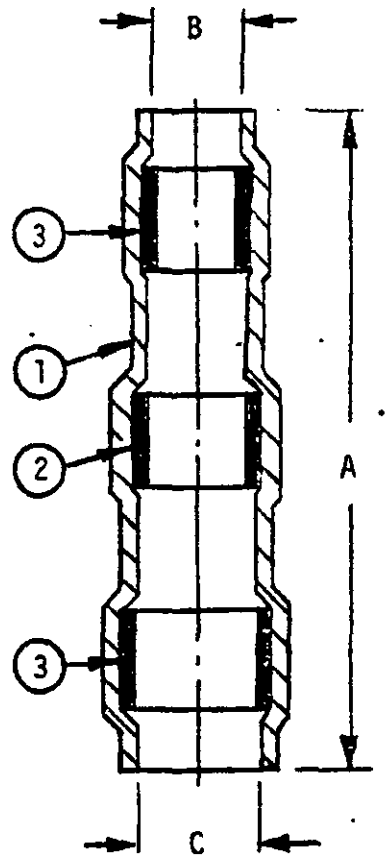

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.

Sizes - See table I
Type - Tubular
Color - Natural

TABLE I

Part No.	Dimensions (inch)			
	As Supplied			After Shrinking
	A	B min	C min	Outside Diameter max
M 81786 /7-1	.65 ±.07	.110	.125	.120
M 81786 /7-2	.65 ±.07	.180	.200	.150
M 81786 /7-3	.75 ±.07	.280	.300	.210

Preparing activity:
Navy - AS
Project No. 4940-N462

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/899

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.