MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY,

(SERIES TNC (CABLED), SOCKET CONTACT, FLANGE MOUNTED, CLASS 2)

This amendment forms a part of MIL-C-39012/29F, dated 14 December 1987, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, delete and substitute the following:

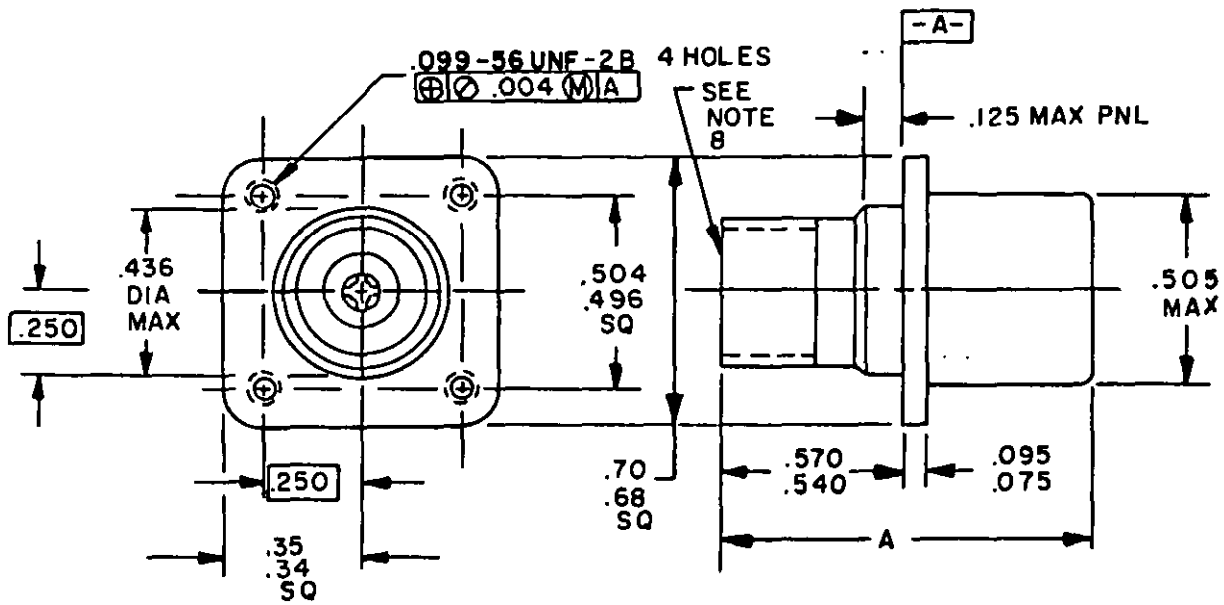

Inches	mm	Inches	mm
.004	0.10	.436	11.07
.075	1.90	.496	12.60
.095	2.41	.505	12.83
.099	2.51	.540	13.72
.125	3.18	.570	14.48
.250	6.35	.68	17.27
.34	8.64	.70	17.78
.35	8.89		

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:51Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. For dimension A, see tables I and III.
3. Metric equivalents are given for general information only.
4. Receptacle not recommended for use on panels with greater than .078 inch (1.98 mm) maximum thickness.
5. Wrench flats are to accommodate standard wrench opening in accordance with FED-STD-H28, appendix 10.
6. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
7. All undimensioned pictorial representations are for reference purposes only.
8. Series TNC, socket contact interface shall be in accordance with MIL-STD-348, "Interface, series TNC, socket contact" figure.

FIGURE 1. General configuration - Continued.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - EA, MI
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3720)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:51Z
Check the source to verify that this is the current version before use.