MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY,
(SERIES SC (CABLED), SOCKET CONTACT, CLASS 2).

This amendment forms a part of MIL-C-39012/36F, dated 14 December 1987, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

Delete and substitute figure 2.

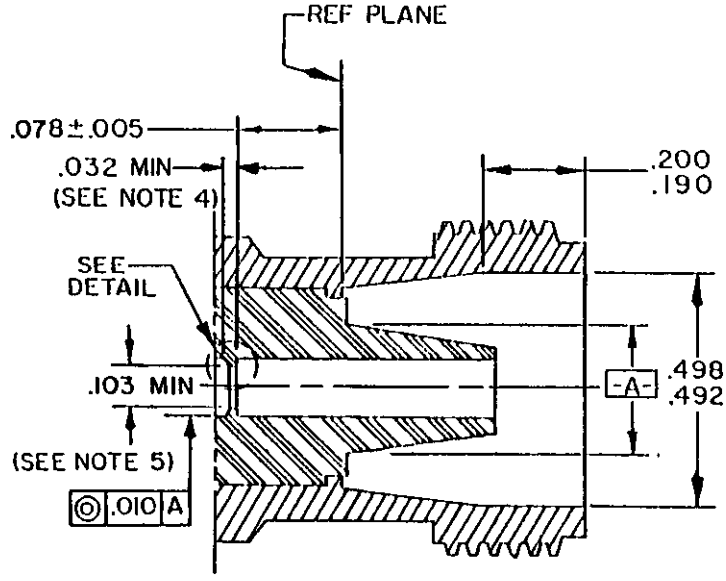

Inches	mm
.005	0.13
.010	0.25
.032	0.81
.078	1.98
.103	2.61
.190	4.82
.200	5.08
.492	12.49
.498	12.65



DETAIL

CATEGORY D

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Chamfer is optional, if chamfer is used put chamfer on a 30° maximum.
5. Dimension to meet connector performance requirements.

FIGURE 2. Mating dimensions for socket termination - Continued.

Distribution statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, EA
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, SH, OS
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3717-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.