MIL-A-16288/10
1 February 1974
SUPERSEDING
MS39010
11 November 1968

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

U. S. REGULATOR TO FRENCH HYDROGEN VALVE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "U.S.-FRANCE H_2".

3. Maximum service pressure 3600 psi.

4. Material: Washer, conforming to MIL-P-15047 "Plastic Sheets, Laminated Thermosetting, Nylon Fabric Base, Phenolic - Resin."

INTENDED USE: The adapter is intended to connect a U. S. hydrogen regulator to a French hydrogen valve.

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:30Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

Preparing activity:

Army - ME

Project No. 8120-0348

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:30Z
Check the source to verify that this is the current version before use.

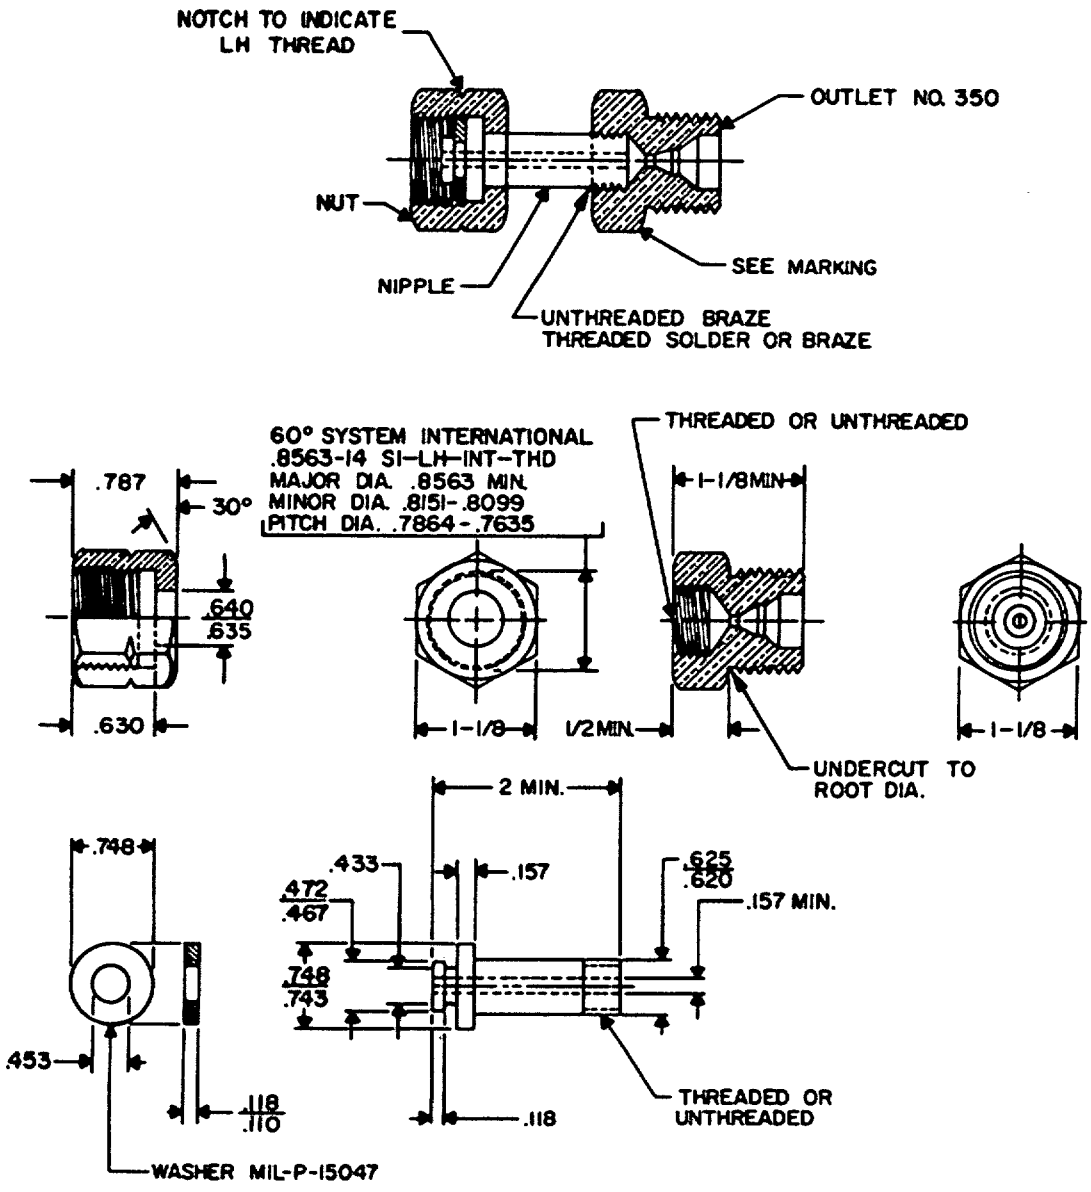


FIGURE 1. ADAPTER, U.S. REGULATOR TO FRENCH VALVE, HYDROGEN.

X-2386

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:30Z
Check the source to verify that this is the current version before use.