MIL-A-16288/13
1 February 1974
SUPERSEDING
MS39220
5 September 1968

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

CLASS 200-510, ACETYLENE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "200-510 C_2H_2".

3. Maximum service pressure 600 psi.

INTENDED USE: The adapter is intended to connect a No. 510 regulator or charging manifold to a No. 200 valve for acetylene service.

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:31Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

Preparing activity:

Army - ME

Project No. 8120-0351

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:31Z
Check the source to verify that this is the current version before use.

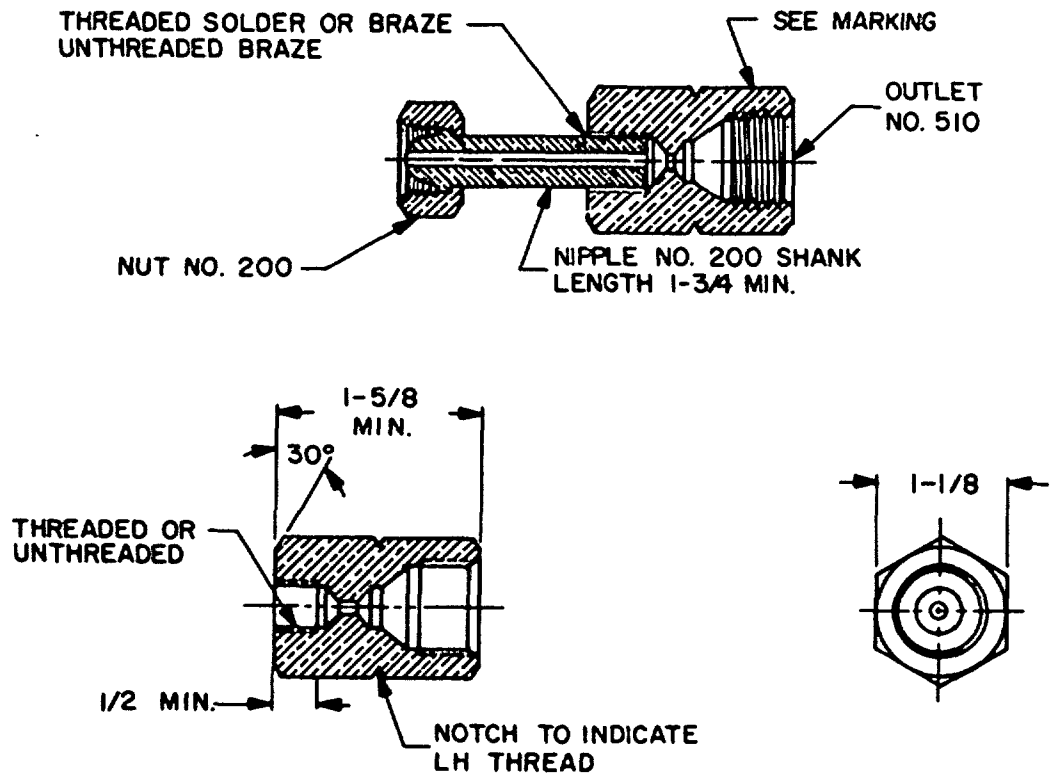


FIGURE 1. ADAPTER, NO. 510 REGULATOR TO NO. 200 VALVE, ACETYLENE.

X-2389

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:31Z
Check the source to verify that this is the current version before use.