MIL-A-16288/18
1 February 1974
SUPERSEDING
MS39274
24 November 1965

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

CLASS 300-520, ACETYLENE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "300-520 C_2H_2".

3. Maximum service pressure 600 psi.

INTENDED USE: The adapter is intended to connect a No. 520 regulator or charging manifold to a No. 300 valve for acetylene service.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Preparing activity:

Army - ME

Project No. 8120-0356

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:32Z
Check the source to verify that this is the current version before use.

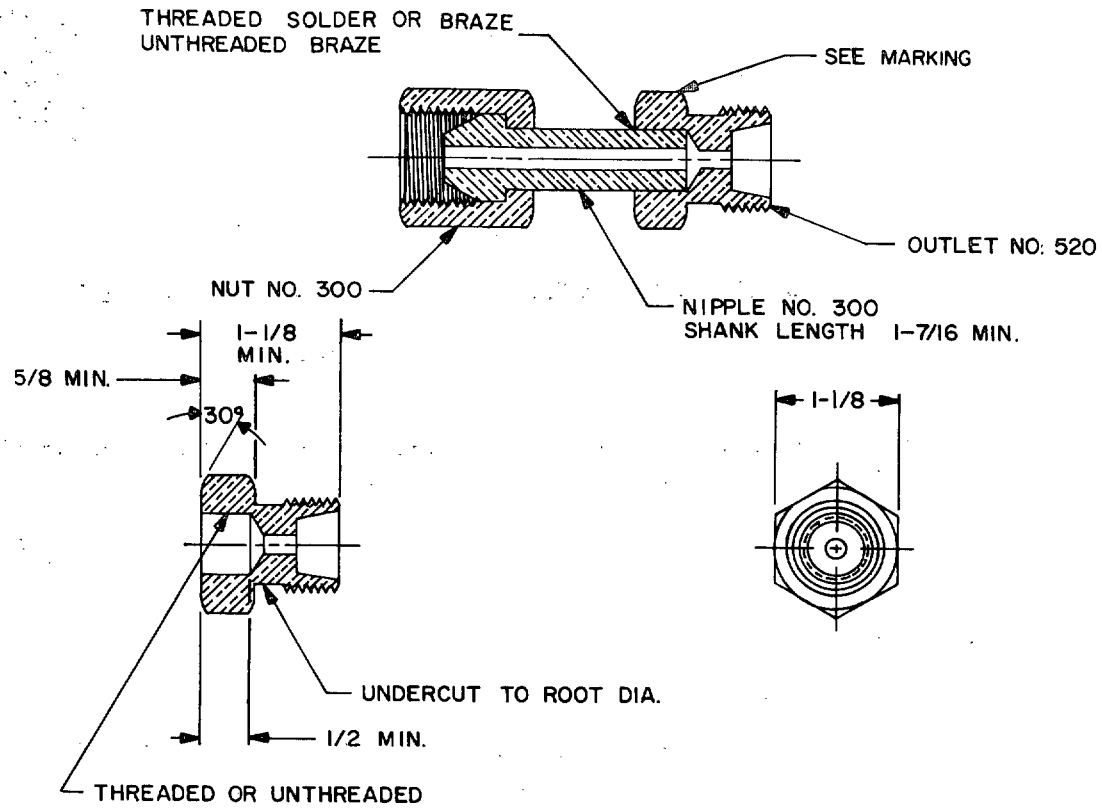


FIGURE 1. ADAPTER, NO. 520 REGULATOR TO NO. 300 VALVE, ACETYLENE.

X-2394

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:32Z
Check the source to verify that this is the current version before use.