MIL-A-16288/6
1 October 1973
SUPERSEDING
MS39006
2 January 1969

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

U. S. REGULATOR TO BRITISH ACETYLENE VALVE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "U.S.-U.K. C_2H_2."

3. Maximum service pressure 600 psi.

INTENDED USE: The adapter is intended to connect a U. S. No. 510 acetylene regulator to a British acetylene valve.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Preparing activity:

Army - ME

Project No. 8120-0344

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:29Z
Check the source to verify that this is the current version before use.

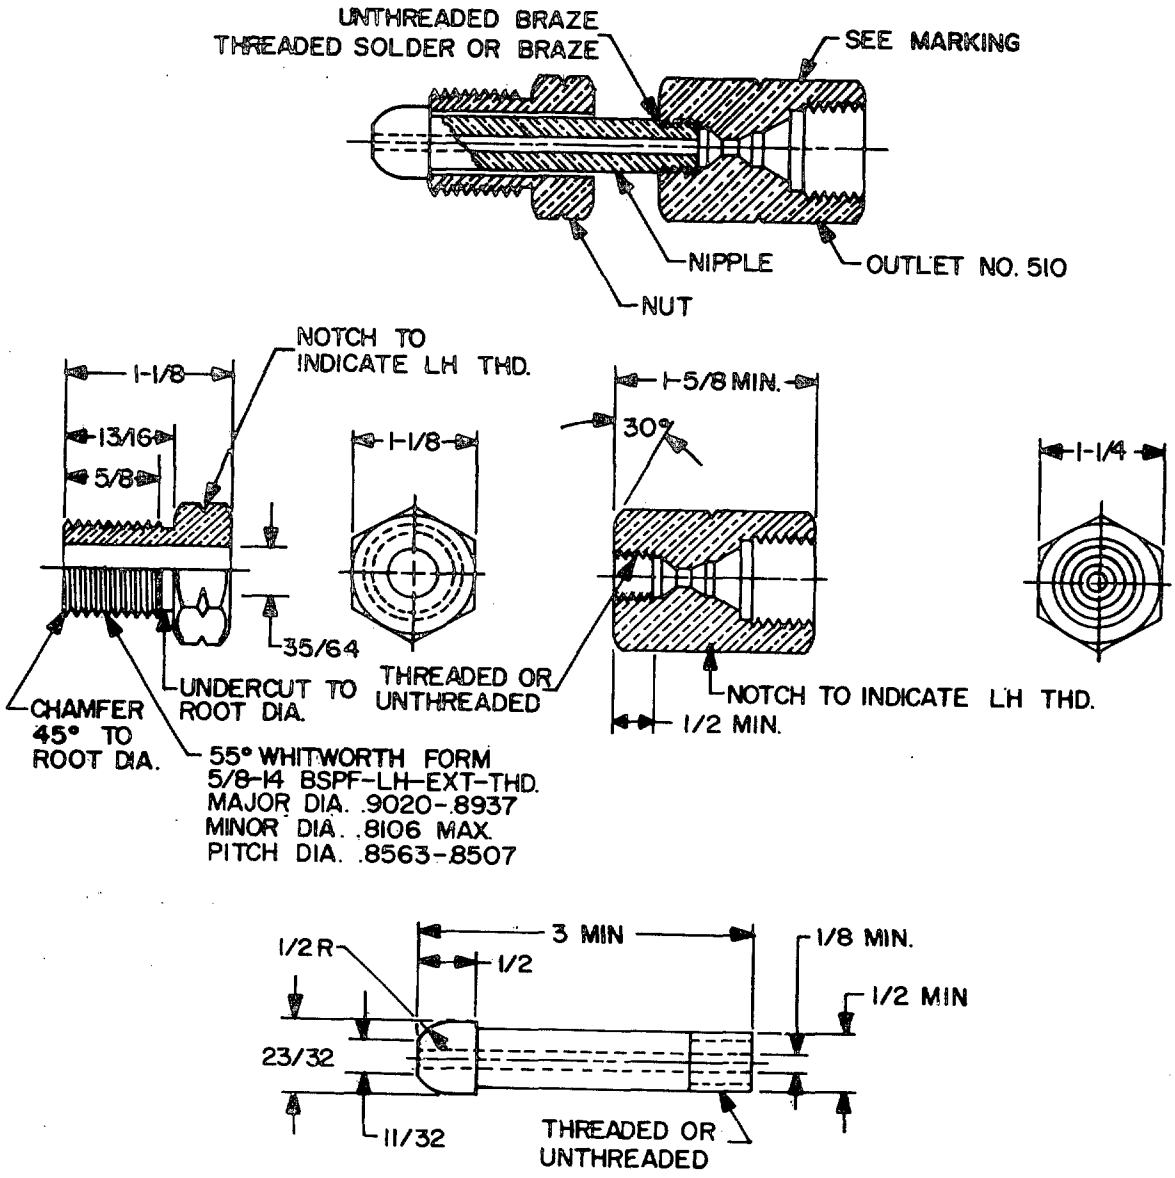


FIGURE I. ADAPTER, U.S. REGULATOR TO BRITISH VALVE, ACETYLENE.

X-2382

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:29Z
Check the source to verify that this is the current version before use.