MIL-A-16288/7
1 February 1974
SUPERSEDING
MS39007
22 April 1969

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

U. S. REGULATOR TO DUTCH ACETYLENE VALVE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "U.S.-DUTCH C_2H_2".

3. Maximum service pressure 600 psi.

4. Material: Washer, conforming to MIL-P-15047 "Plastic Sheets, Laminated Thermosetting, Nylon Fabric Base, Phenolic - Resin."

INTENDED USE: The adapter is intended to connect a U. S. No. 510 acetylene regulator to a Dutch acetylene valve.

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:29Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Review activity:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

Preparing activity:

Army - ME

Project No. 8120-0345

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:29Z
Check the source to verify that this is the current version before use.

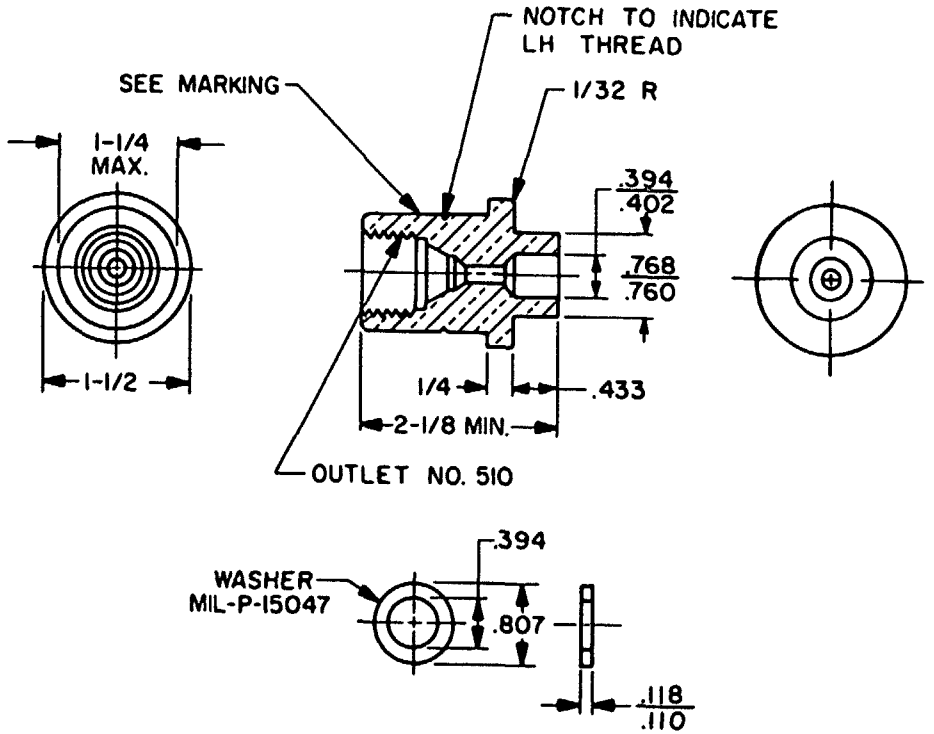


FIGURE 1. ADAPTER, U.S. REGULATOR TO DUTCH VALVE, ACETYLENE.

X-2383

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:29Z
Check the source to verify that this is the current version before use.