INCH - POUND

MIL-DTL-38999/10A
12 July 2002

SUPERSEDING
MIL-C-38999/10
10 March 1982

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, DUMMY STOWAGE, BAYONET COUPLING, (MIL-C-27599, SERIES II AND MIL-DTL-38999, SERIES II)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

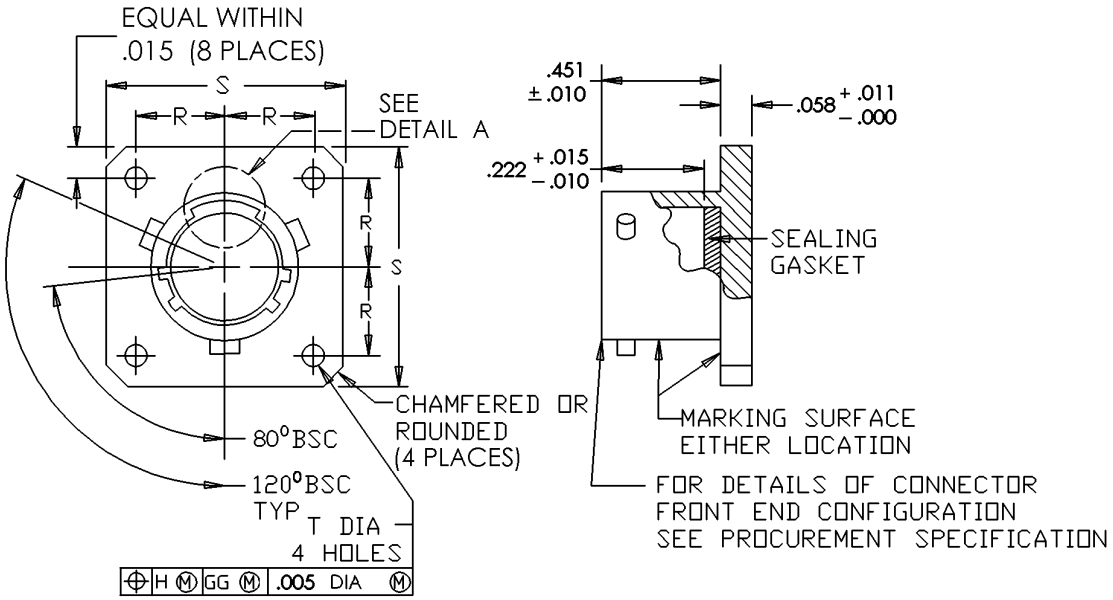

FIGURE 1. Dummy receptacle, finishes B and X.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

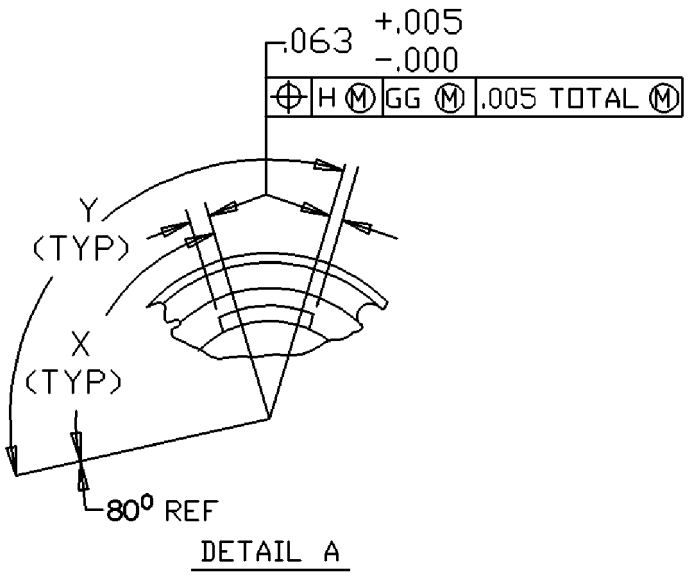

Dimensions					
Shell size	R BSC	S max	T dia +.010 -.005	X (TYP)	Y (TYP)
8	.297	.828	.120	82°	118°
10	.3595	.954		72°	128°
12	.406	1.047		68°	132°
14	.453	1.141		66°	134°
16	.4845	1.234		70°	130°
18	.531	1.328		70°	130°
20	.578	1.453		70°	130°
22	.625	1.578		74°	126°
24	.6875	1.703	.147	74°	126°

FIGURE 1. Dummy receptacle, finishes B and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm
.005	0.13	.297	7.54	8.28	21.03
.010	0.25	.3595	9.13	9.54	24.23
.011	0.28	.406	10.31	1.047	26.59
.015	0.38	.451	11.46	1.141	28.98
.058	1.47	.453	11.51	1.234	31.34
.063	1.60	.531	13.49	1.328	33.73
.120	3.05	.578	14.68	1.453	36.91
.147	3.73	.625	15.88	1.578	40.08
.222	5.64	.6875	17.46	1.703	43.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. The gage features for GG shall be .010 inch (.25 mm) smaller than the MMC size at basic location.
4. Flange is solid.
5. Dummy receptacles are use when unmated plugs must be protected.

FIGURE 1. Dummy receptacle, finishes B and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999, except as noted.

Material:

Shell: Aluminum alloy as specified in MIL-DTL-38999 with finishes B or X.
Sealing Gasket: Non-corrosive silicone or fluorosilicone elastomer.

This receptacle mates with MS27473, MS27480, MS27484 and MS27500.
Fits all polarization positions.

Part or Identifying Number (PIN) example:

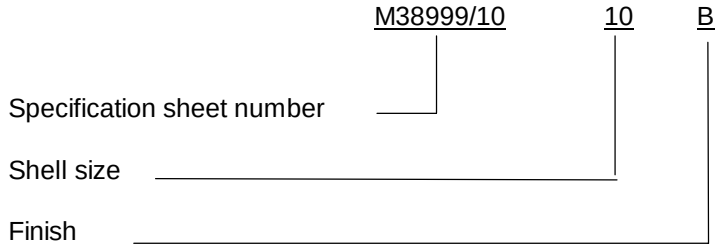

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

QUALIFICATION:

Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, coupling pin strength, and visual and mechanical inspection as specified in MIL-DTL-38999, conducted on two samples of each shell size.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA - IS

Preparing activity:
DLA - CC

(Project 5935-4364)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.