[METRIC]


MIL-C-38999/20D
07 May 1990
SUPERSEDING
MIL-C-38999/20C
19 August 1988

MILITARY SPECIFICATION SHEET

Ⓓ CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, WALL MOUNTING FLANGE REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓓ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38999.

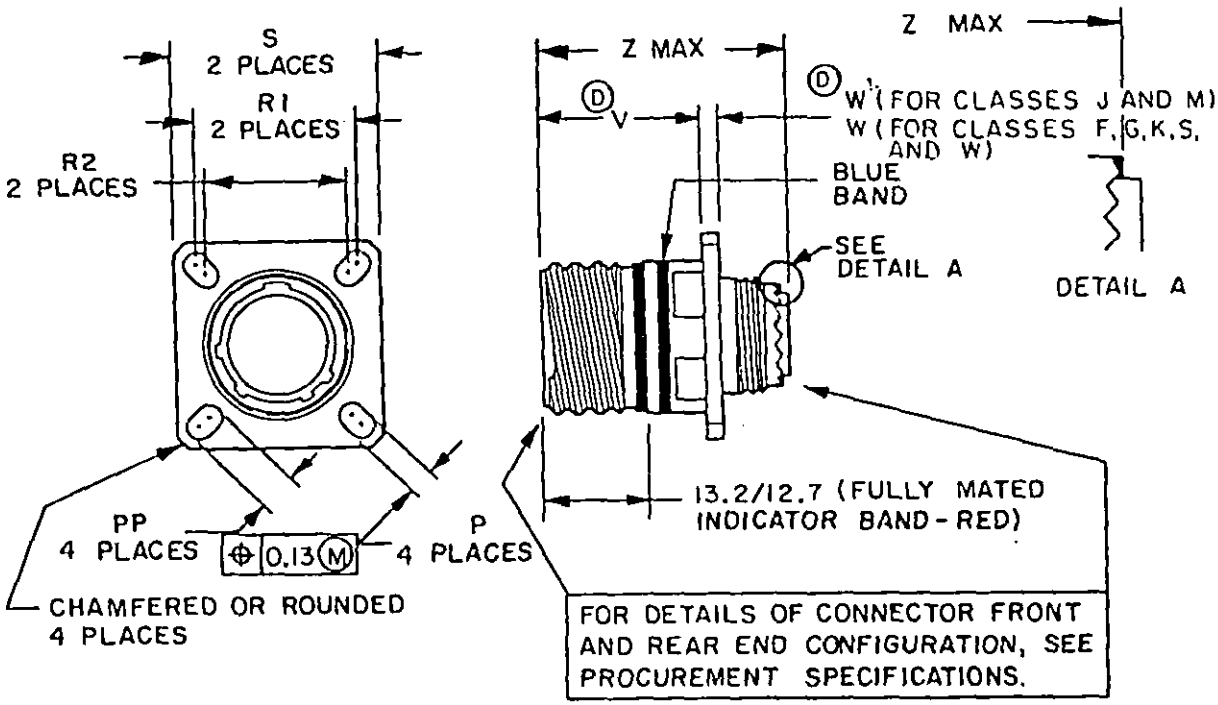

Ⓓ FIGURE 1. Receptacle, classes F, G, J, K, M, S, and W.

Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Dimensions										
Shell size	Shell size code	P dia ±0.20	PP ±0.20	R1 (see note 2)	R2 (see note 3)	S ±0.3	Ⓓ V +1.4 -0.0	W	Ⓓ W'	Z max
9	A	3.25	5.49	18.26	15.09	23.8	19.5	2.5/2.1	3.65/2.1	31.5
11	B	3.25	4.93	20.62	18.26	26.2	19.5	2.5/2.1	3.65/2.1	31.5
13	C	3.25	4.93	23.01	20.62	28.6	19.5	2.5/2.1	3.65/2.1	31.5
15	D	3.25	4.39	24.61	23.01	31.0	19.5	2.5/2.1	3.65/2.1	31.5
17	E	3.25	4.93	26.97	24.61	33.3	19.5	2.5/2.1	3.65/2.1	31.5
19	F	3.25	4.93	29.36	26.97	36.5	19.5	2.5/2.1	3.65/2.1	31.5
21	G	3.25	4.93	31.75	29.36	39.7	18.7	3.2/2.1	4.35/2.1	31.5
23	H	3.91	6.15	34.93	31.75	42.9	18.7	3.2/2.1	4.35/2.1	31.5
25	J	3.91	6.15	38.10	34.93	46.0	18.7	3.2/2.1	4.35/2.1	31.5

NOTES:
1. Dimensions are in millimeters.
2. Front or rear panel mounting
3. Front panel mounting only.

Ⓓ FIGURE 1. Receptacle, classes F, G, J, K, M, S, and W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with: DOD-C-38999/26.

For insert arrangements: See MIL-STD-1560.

(D) Part or Identifying Number (PIN) example:

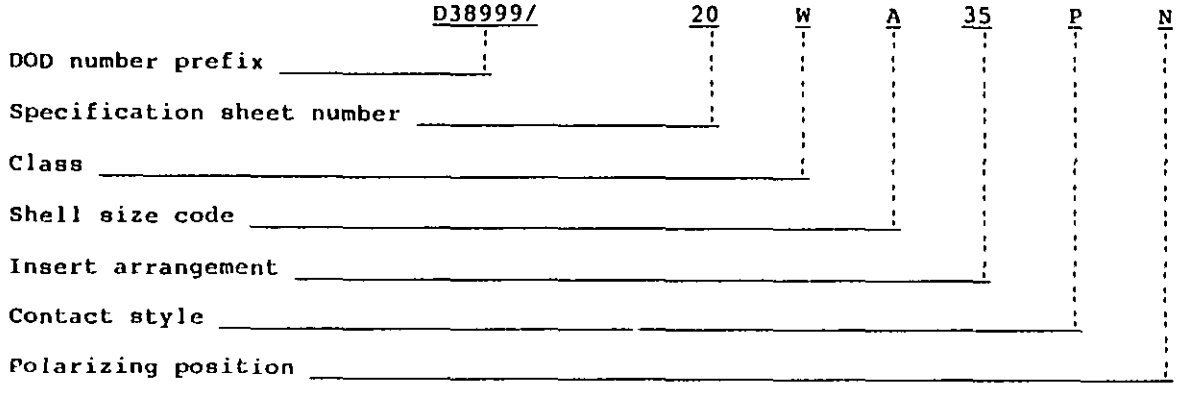

N is required for normal position

Class F is not for Navy use and is inactive for Air Force new design use.

(D) NOTE: The term Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
(D) NASA - NA

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3740-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.