METRIC

MIL-DTL-38999/21C
10 July 2008
SUPERSEDING
MIL-DTL-38999/21B
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

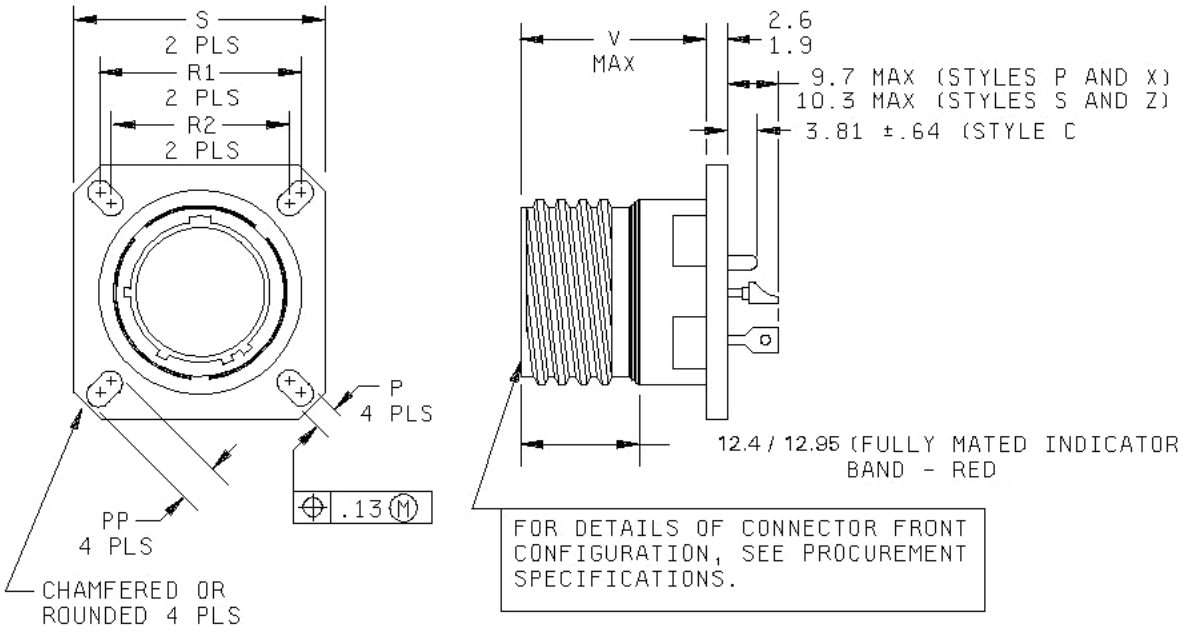


FIGURE 1. Receptacle, classes N and Y.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Connector dimensions

Shell size	Shell size code	P ± .20	PP ± .20	R1 (see note 3)	R2 (see note 4)	S ± .3	V max
9	A	3.25 (.128)	5.49 (.216)	18.26 (.719)	15.09 (.594)	23.8 (.937)	21.4 (.843)
11	B	3.25 (.128)	4.93 (.194)	20.62 (.812)	18.26 (.719)	26.2 (1.031)	21.4 (.843)
13	C	3.25 (.128)	4.93 (.194)	23.01 (.906)	20.62 (.812)	28.6 (1.126)	21.4 (.843)
15	D	3.25 (.128)	4.39 (.173)	24.61 (.969)	23.01 (.906)	31.0 (1.220)	21.4 (.843)
17	E	3.25 (.128)	4.93 (.194)	26.97 (1.062)	24.61 (.969)	33.3 (1.311)	21.4 (.843)
19	F	3.25 (.128)	4.93 (.194)	29.36 (1.156)	26.97 (1.062)	36.5 (1.437)	21.4 (.843)
21	G	3.25 (.128)	4.93 (.194)	31.75 (1.250)	29.36 (1.156)	39.7 (1.563)	21.4 (.843)
23	H	3.91 (.154)	6.15 (.242)	34.93 (1.375)	31.75 (1.250)	42.9 (1.689)	21.4 (.843)
25	J	3.91 (.154)	6.15 (.242)	38.10 (1.500)	34.93 (1.375)	46.0 (1.811)	21.4 (.843)

NOTES:
1. Dimensions are in millimeters.
2. Polarizing position N is shown.
3. Front or rear panel mounting.
4. Front panel mounting only.
5. Inch equivalents are given for information only.

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/26.

Insert arrangements: See MIL-STD-1560.

Part or identifying Number (PIN) example:

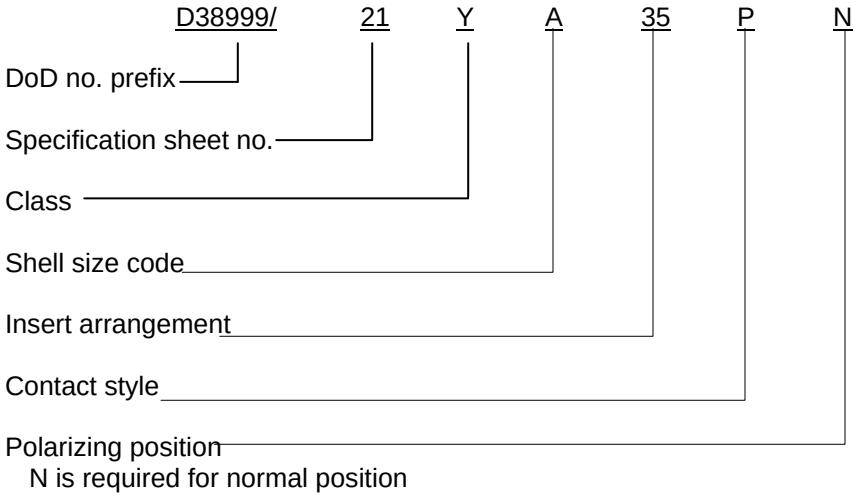

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-STD-38999, this document references the following:

MIL-DTL-38999/26
MIL-STD-1560

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2008-019)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA - IS

NOTE: The activities listed above were interested in this document as of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.