METRIC


MIL-DTL-38999/21C
w/AMENDMENT 2
11 August 2022
SUPERSEDING
MIL-DTL-38999/21C
w/AMENDMENT 1
5 August 2016

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

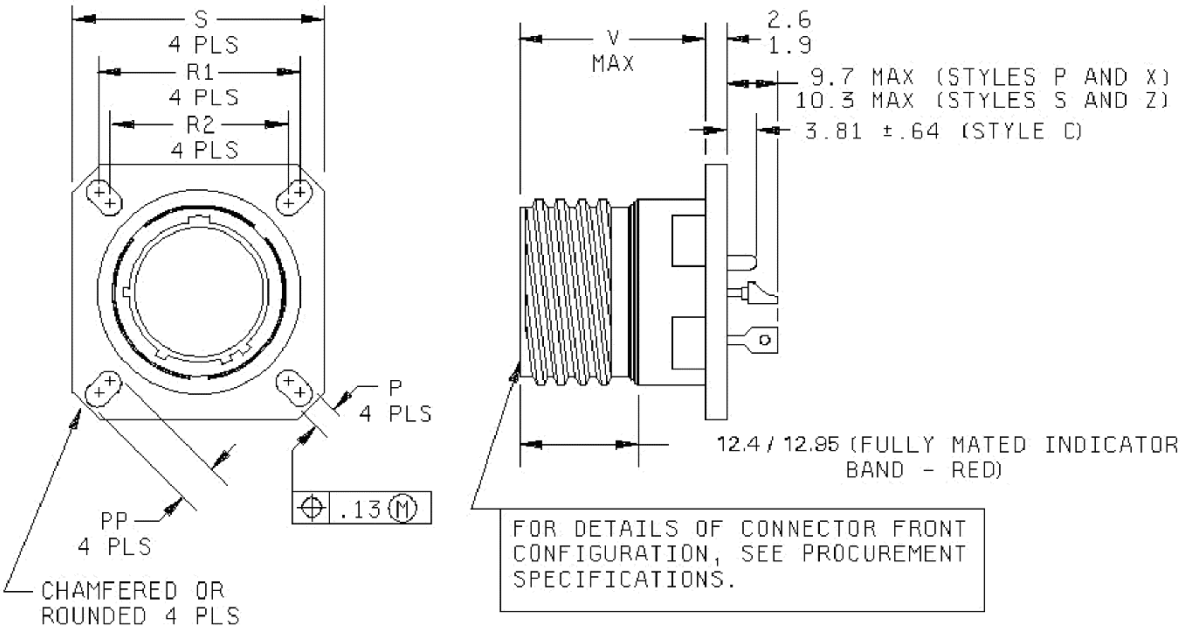

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

FIGURE 1. Receptacle, classes N and Y.

Shell size	Shell size code	P ± .20	PP ± .20	R1 (see note 3)	R2 (see note 4)	S ± .3	V max
9	A	3.25 (.128)	5.49 (.216)	18.26 (.719)	15.09 (.594)	23.8 (.937)	21.4 (.843)
11	B	3.25 (.128)	4.93 (.194)	20.62 (.812)	18.26 (.719)	26.2 (1.031)	21.4 (.843)
13	C	3.25 (.128)	4.93 (.194)	23.01 (.906)	20.62 (.812)	28.6 (1.126)	21.4 (.843)
15	D	3.25 (.128)	4.39 (.173)	24.61 (.969)	23.01 (.906)	31.0 (1.220)	21.4 (.843)
17	E	3.25 (.128)	4.93 (.194)	26.97 (1.062)	24.61 (.969)	33.3 (1.311)	21.4 (.843)
19	F	3.25 (.128)	4.93 (.194)	29.36 (1.156)	26.97 (1.062)	36.5 (1.437)	21.4 (.843)
21	G	3.25 (.128)	4.93 (.194)	31.75 (1.250)	29.36 (1.156)	39.7 (1.563)	21.4 (.843)
23	H	3.91 (.154)	6.15 (.242)	34.93 (1.375)	31.75 (1.250)	42.9 (1.689)	21.4 (.843)
25	J	3.91 (.154)	6.15 (.242)	38.10 (1.500)	34.93 (1.375)	46.0 (1.811)	21.4 (.843)

NOTES:
1. Dimensions are in millimeters.
2. Polarizing position N is shown.
3. Front or rear panel mounting.
4. Front panel mounting only
5. Inch equivalents are given for information only.
6. The specified red band location is measured from the front edge of the shell to the back edge of the red band.

FIGURE 1. Receptacle, classes N and Y - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/26.

Insert arrangements: See MIL-STD-1560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.

Part or identifying Number (PIN) example:

D38999/	21	Y	A	35	P	N

D38999/	DoD number prefix
21	Specification sheet number
Y	Class
A	Shell size code
35	Insert arrangement
P	Contact style
N	Polarizing positions (N is required for normal position)

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/26
MIL-STD-1560

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-179)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:43Z
Check the source to verify that this is the current version before use.