METRIC
DOD-C-38999/22B
4 OCTOBER 1985
SUPERSEDING
DOD-C-38999/22A
5 OCTOBER 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, DUMMY STOWAGE, TRIPLE START THREADED COUPLING (MIL-C-38999, SERIES III), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.

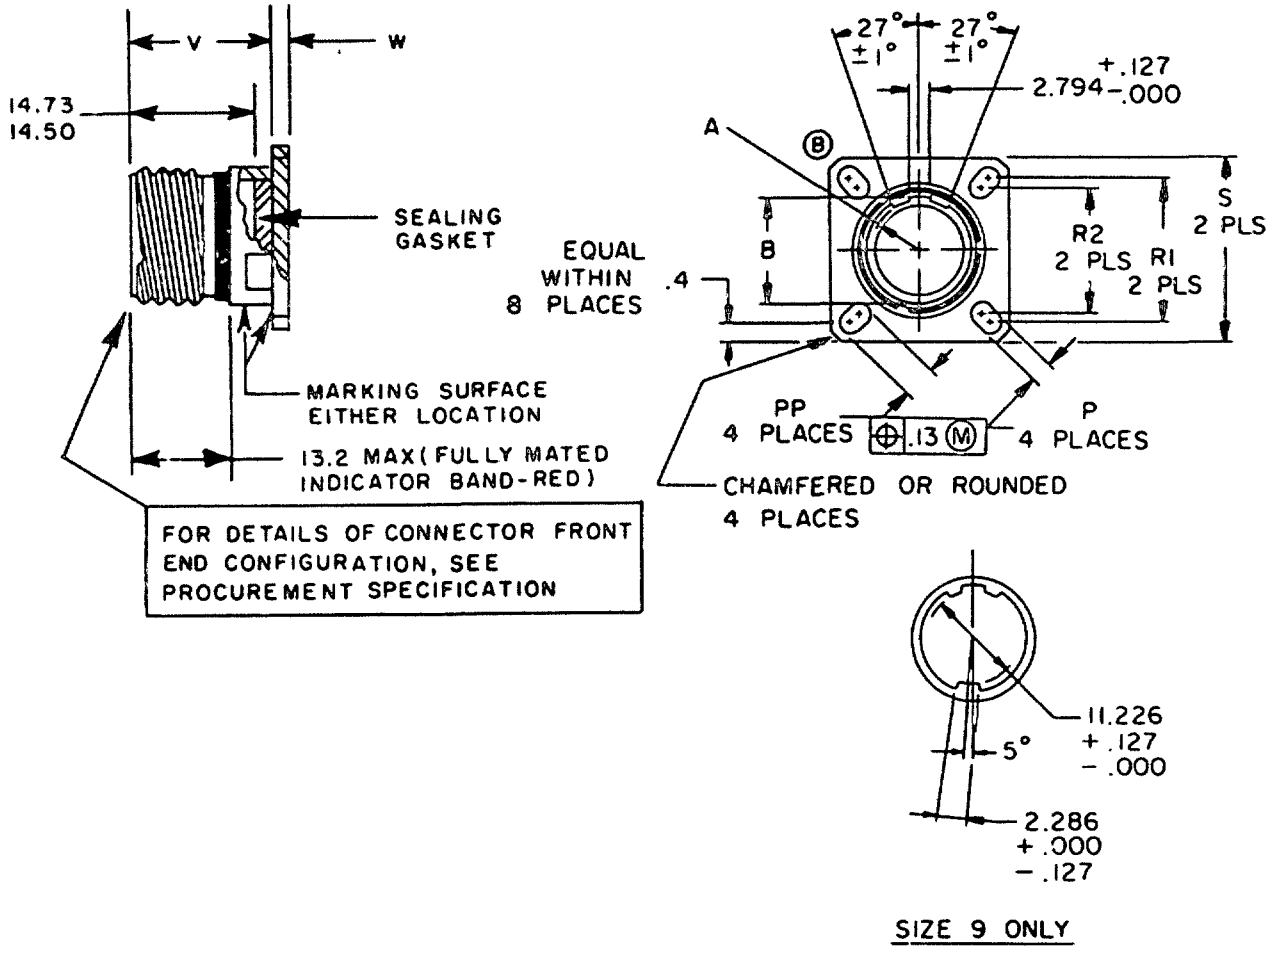


FIGURE 1. Dummy receptacle, class W.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Dimensions.

Shell size	Shell size code	P DIA ±.20	PP ±.20	1/ R1	2/ R2	S ±.3	V +.5 -.0	W ±.3	A Radius +.127 -.000	B° +.000 -.127
9	A	3.25	5.49	18.26	15.09	23.8	20.9	2.5	---	12.497
11	B	"	4.93	20.62	18.26	26.2	"	"	7.239	15.748
13	C	"	4.93	23.01	20.62	28.6	"	"	8.661	19.533
15	D	"	4.39	24.61	23.01	31.0	"	"	10.236	22.708
17	E	"	4.93	26.97	24.61	33.3	"	"	11.836	25.882
19	F	"	4.93	29.36	26.97	36.5	20.9	2.5	13.157	28.550
21	G	3.25	4.93	31.75	29.36	39.7	20.1	3.2	14.757	31.725
23	H	3.91	6.15	34.93	31.75	42.9	20.1	3.2	16.332	34.900
25	J	3.91	6.15	38.10	34.93	46.0	20.1	3.2	17.932	38.075

1/ Dimension required for intermountability with front or rear mounting series I.
2/ Dimension required for intermountability with front mounting series II.

NOTES:
1. Dimension are in millimeters.
2. Flange is solid.
3. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dummy receptacle, class W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999, except as noted.

Material:

Shell: Aluminum alloy as specified in MIL-C-38999.


Sealing gasket: Silicone elastomer.

Class: W

Qualification: Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, and visual and mechanical inspection as specified in MIL-C-38999, conducted on two samples of each shell size.

Ⓑ This receptacle mates with DOD-C-38999/26, /29, /30 and / 31.

Ⓑ Part number: Consists of the letter D, the basic number of the specification sheet, shell size code and class.

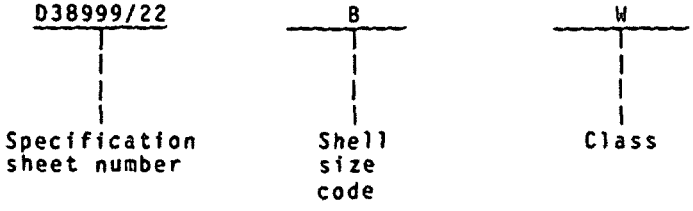

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3525)

U.S. GOVERNMENT PRINTING OFFICE: 1993 - 605-036/26670

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.